

Houston International Specialty Inc.


Size	5.5
Grade	N/L 80
Weight	20

TCFJ - 5

Coupling and Pipe Dimensions (in)					
	Outer Diameter	Inner Diameter	Make-up Loss	Wall Thickness	Drift Diameter
Pipe	5.500	4.778			
Swage		4.778	3.694	0.361	4.653

Torque Values (ft-lbs)			
During Make-Up			Max. Working Torque
Minimum	Optimum	Maximum	
5,000	5,750	6,500	8,800

Yield Stress (x1000 lbs.)	
Tensile	Compressive
233	121

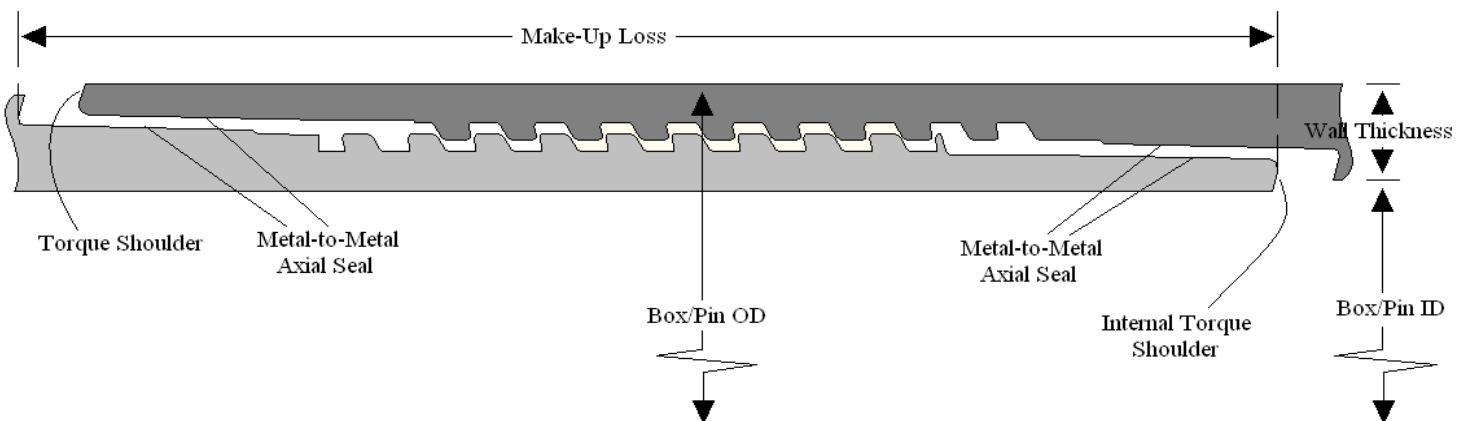

*Data are for information purposes only. Though HIS has made efforts to ensure accuracy, HIS makes no warranty for loss or damage due to its use.