



ROTAVATOR

HR7 / HR7 HD / HR12 / HR16 / HR18

ROTACADET HR14 SM / HR16 SM

Rotavator
Rotacadet



Rotavator HR7 / HR7 HD / HR12




HR7-50, the machine suitable for compact tractors, for gardening and orchards.




HR12, heavy duty machine for professional use. Suitable for tractors up to 40 HP.


HR7

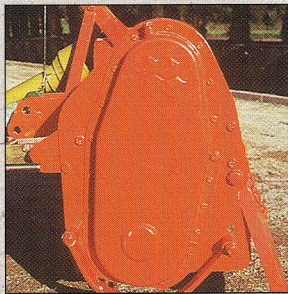

Heavy duty chain side drive.

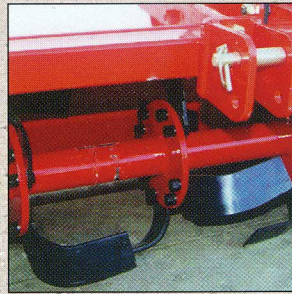

Durable rotor with four blades per flange.

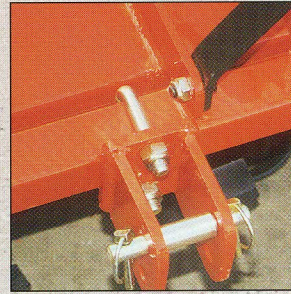


Moveable bracket - easy hitch adjustment.

HR7 HD



Six blades entering the soil in uniform sequence, result in an even load on the tractor. PTO slip clutch provides protection against obstructions and allows intensive work. Finer, level tilth is achieved.

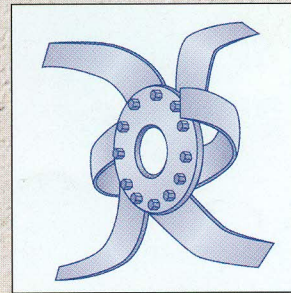

HR 7 HD has 6 durable blades - long life.

HR12



Strong gear side drive.



HR12-50, the best choice for small tractors.



Strong hull and frame. Easy skid shoe adjustment.

Rotavator HR16 / HR18



The best solution for tractors up to 65 HP. The complete range of Rotavators covered by these two series provides strong and reliable solutions for use in orchards, vegetables or normal farming, and offers a wide range of working widths.


- HR16 single speed machine.
- HR18 four speed machine.



HR16: Single speed gearbox. Reliable and highly efficient.




Strong curved trailing board provides an even and smooth finish of the working area. The forged hinges provides greater durability.

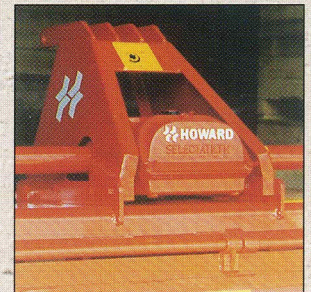


HR18: With the 4 speed gearbox can be easily adapted to soil conditions and crop requirements.


ROTACADET SM

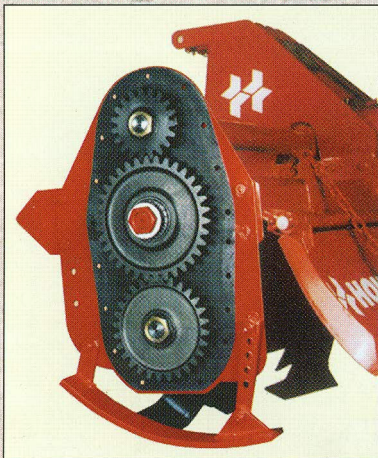

Heavy duty gear side drive, top mast and double tube frame - prolonged life.

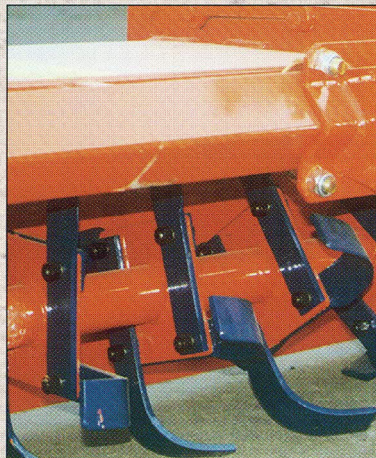

Detail of Rotacadet Rotor: High output with extremely low power demand.

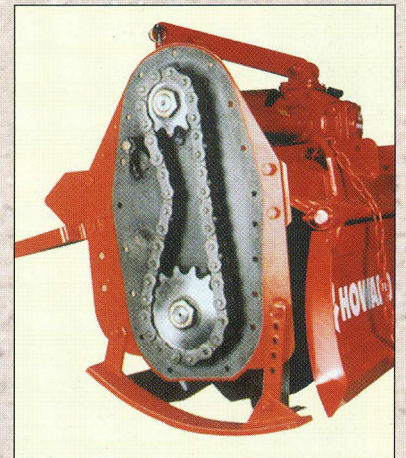

HR14 SM: Chain side drive, single tube and standard 3 point linkage.

Technical information

Standard equipment	Optional equipment
<ul style="list-style-type: none"> • PTO shaft with clutch • HR7: Four blades per flange 665149/150 • HR7 HD / HR12: Six blades per flange 665149/150 • HR16 / HR18: Six blades per flange 9900/9901 • HR14 SM & HR16 SM: Four blades per flange 9941/42 	<ul style="list-style-type: none"> • Side tine (HR12 / HR14 SM / HR16 / HR16 SM / HR18) • Speed blade (HR16 / HR18) 9953/9954 • Front wheels control depth (HR16 / HR14 SM / HR16 SM / HR18) • Reverse gearbox (HR12 / HR16)

	Model	Working width in (cm)	Number of blades	Total width in (cm)	Weight lb (kg)	Power range HP	Speeds rpm	
ROTAVATOR	HR7-40	40 (103)	16	45 (115)	365 (165)	12-25	232	
	HR7-50	50 (128)	20	55 (140)	400 (180)	18-30		
	HR7-60	60 (155)	24	65 (165)	435 (200)	20-30		
	HR7-40 HD	40 (103)	24	45 (115)	376 (170)	20-30		
	HR7-50 HD	50 (128)	30	55 (140)	415 (190)	22-32		
	HR7-60 HD	60 (155)	36	65 (168)	455 (205)	25-35		
	230	HR12-30	30 (80)	18	40 (102)	374 (170)	15-30	
		HR12-35	35 (90)	21	43 (107)	385 (175)	15-30	
		HR12-40	40 (103)	24	45 (115)	396 (180)	15-30	
		HR12-45	45 (115)	27	50 (130)	407 (185)	20-35	
		HR12-50	50 (128)	30	55 (140)	418 (190)	25-35	
		HR12-55	55 (140)	33	60 (155)	429 (195)	30-40	
		HR12-60	60 (155)	36	65 (168)	451 (205)	35-40	
		223	HR16-30	30 (80)	18	40 (102)	487 (220)	25-30
			HR16-35	35 (90)	21	44 (112)	520 (235)	30-35
			HR16-40	40 (103)	24	48 (122)	554 (250)	30-40
			HR16-45	45 (115)	27	54 (137)	586 (265)	35-45
			HR16-50	50 (128)	30	60 (152)	635 (290)	40-50
	HR16-55		55 (140)	33	64 (162)	668 (305)	40-55	
	HR16-60		60 (155)	36	70 (177)	703 (320)	45-55	
	HR16-65		65 (165)	39	74 (187)	736 (335)	45-60	
	HR16-70		70 (180)	42	80 (202)	770 (350)	45-60	
	HR16-75		75 (190)	45	84 (212)	805 (365)	50-60	
	172 / 205 243 / 290	HR16-80	80 (205)	48	90 (227)	838 (380)	50-65	
		HR18-50	50 (128)	30	60 (152)	668 (305)	40-50	
		HR18-55	55 (140)	33	64 (163)	701 (320)	40-55	
		HR18-60	60 (155)	36	70 (177)	736 (335)	45-55	
		HR18-65	65 (165)	39	74 (187)	769 (350)	45-60	
HR18-70		70 (180)	42	80 (202)	803 (365)	45-60		
219	HR18-75	75 (190)	45	84 (212)	838 (380)	50-60		
	HR18-80	80 (205)	48	90 (227)	871 (395)	50-65		
	ROTACADET	HR14-70 SM	70 (180)	40	80 (202)	720 (325)	25-50	
		HR14-80 SM	80 (205)	44	90 (227)	775 (350)	35-65	
223	HR16-70 SM	70 (180)	40	80 (202)	732 (330)	25-50		
	HR16-80 SM	80 (205)	44	90 (227)	790 (360)	35-65		

101001845 KC/GB/ROTAVATOR HR7-HR18/BRO/0102 Jannerup offset a/s



In Canada contact: Kongskilde Limited
 231 Thames Rd. E., Exeter, Ontario, Canada N0M IS3
 Tel.: 519 235-0840 / Fax: 519 235-2931
 E-mail: mail@kc.kongskilde.com

In the USA contact: Howard USA Inc.
 10 S. Jefferson Street, Harvard, Illinois 60033, USA
 Tel.: + 1 815 943 5401, Fax: + 1 815 943 3636
 E-mail: howardusa@owc.net
 Visit website: www.kongskilde.com

Dealer:



**HOWARD ROTAVATOR
 GUY MACHINERY
 14213 WASHINGTON ST.
 IL. HWY 120 WEST
 WOODSTOCK, IL 60098
 (815) 338-0600**

Subject to be changed without notice