



AMERICAN ELECTRIC EQUIPMENT, INC.

P.O. BOX 710 BECKLEY, WV 25801


PHONE: 304-255-7438

FAX: 304-255-7448


PL12045-067

Document A-13309

November 8, 2012

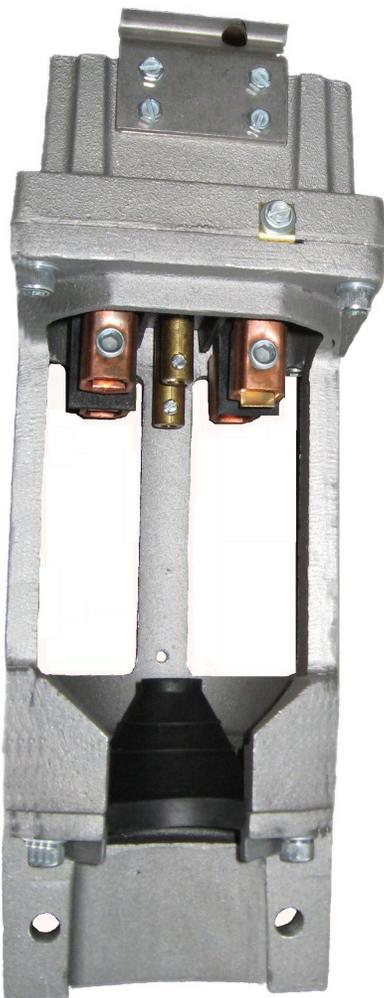

PIN ARRANGEMENT 300 AMP 600 VOLT



Lever Action Connectors



AEEI's low voltage figure 67 connectors are rugged, trouble free devices providing quick, confident connect/disconnect for portable mining equipment or self-propelled machinery. They are rated 300 Amperes at 600 VAC. Cable sizes range from #6 to 2/0 AWG.

Available Repair Parts List



Item	Quantity	Part Number	Description
1	1	10942-1	TOP PILOT BLADE ASSY.
2	1	10942	BOTTOM PILOT BLADE ASSY.
3	1	10941	L1 POWER BLADE ASSY.
4	3	10941-1	L2 - L3 POWER BLADE ASSY. GROUND
5	4	2064-1	5/8" ROTOR CLIP
6	2	2064-2	1/2" ROTOR CLIP
7	4	102-2	POWER AND GROUND TERMINAL
8	4	2694	7/16" x 3/4" NF SET SCREW
9	1	2069-2	3/16" x 1/4" HEX HEAD SLOTTED MACH. SCREW
10	4	2069-3	3/16" x 1/2" HEX HEAD SLOTTED MACH. SCREW
11	1	2067	3/16" FLATWASHER
12	5	2071	3/16" LOCK WASHER
13	8	12048	5/16" x 1" SOCKET HEAD CAP SCREW
14	8	2071-2	5/16" LOCK WASHER
15	2	2084-8	3/8" x 2 1/2" HEX HEAD CAP SCREW
16	2	2067-3	3/8" FLAT WASHER
17	2	2071-3	3/8" LOCK WASHER
18	2	2086	3/8" HEX NUT
19	1	063	WARNING NAME TAG
20	2	2072	1/8" x 1/4" NO.4 DRIVE SCREW
21	2	2257	1/4-20 x 1/2" SLOTTED HEAD MACH. SCREW
22	1	2081-5	1/4" x 3/4" NC CAP. SCREW HEX HEAD
23	1	2067-1	1/4" FLAT WASHER
24	1	2071-1	1/4" LOCK WASHER
25	1	11366	TOP LATCH
26	1	11365	TOP LATCH SPACER
27	1	12049-1	GROUND STRAP
28	1	714	IDENTIFICATION STICKER
29	1	1672	GROMMET
30	1	014-1	STRAIN CLAMP HALF
31	1	013-1	NUT STRAIN CLAMP
32	1	001-1	INSULATOR
33	1	11068	BASE
34	1	015-1	BELL HOUSING
35	1	016-1	BELL SLEEVE

Available Repair Kit

Part Number	Qty.	Description	Drawing Number
064-1-KIT		Top Latch Kit For 67 Plug	
		Parts Included In Kit	
	1	TOP LATCH	A-11366
	1	TOP LATCH SPACER	A-11365
	4	3/16" x 1/2" HEX HEAD SLOTTED MACH. SCREW	A-2069
	4	3/16" LOCK WASHER	A-2071

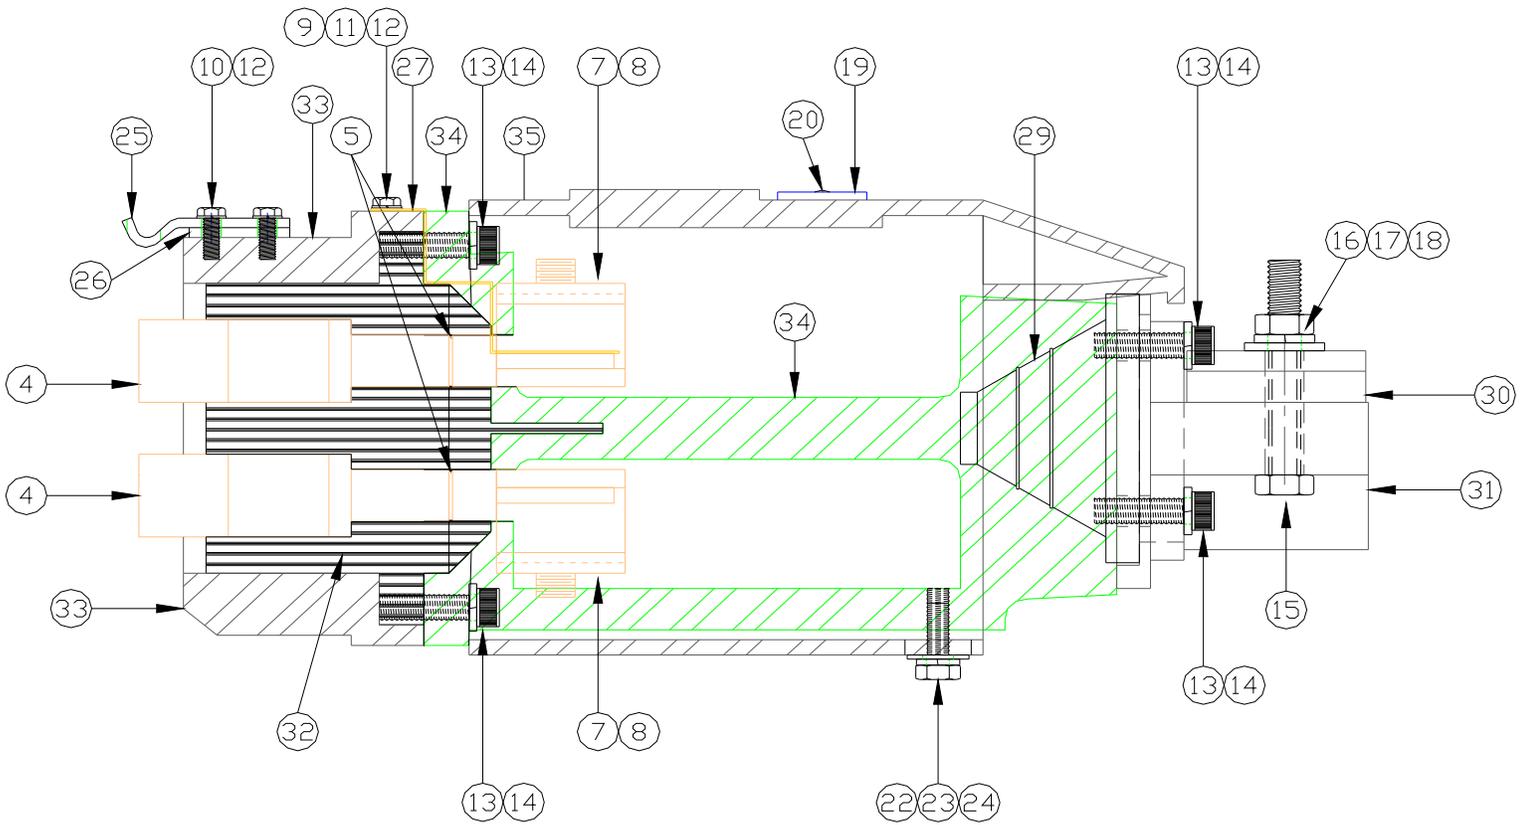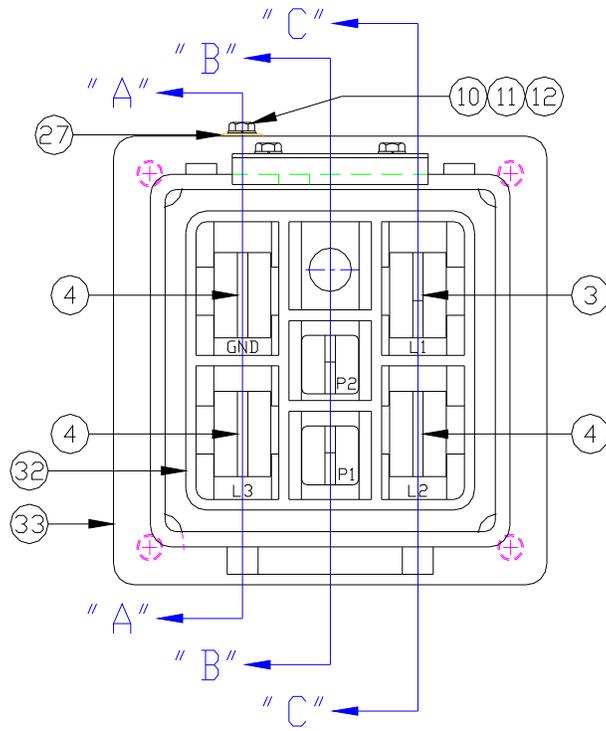

SECTION "A" - "A"

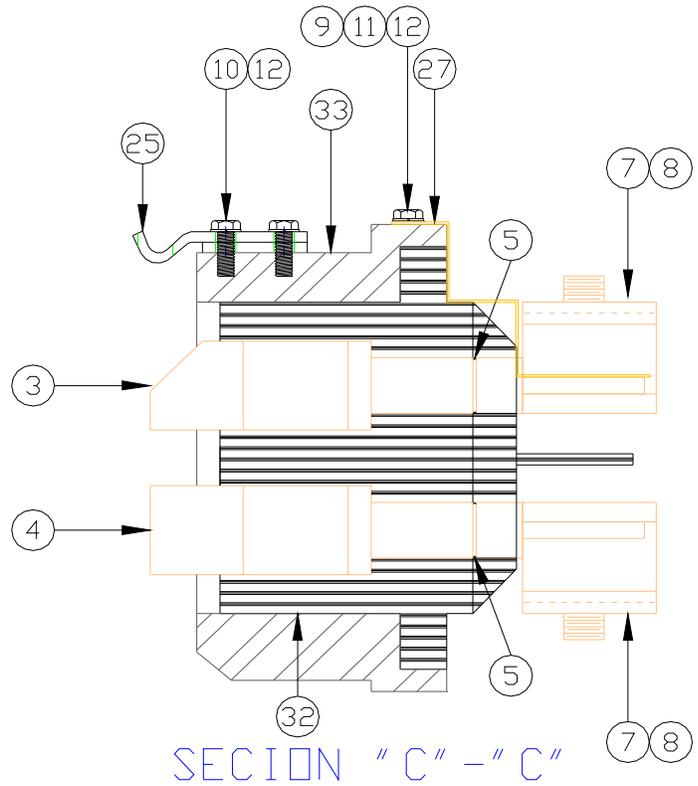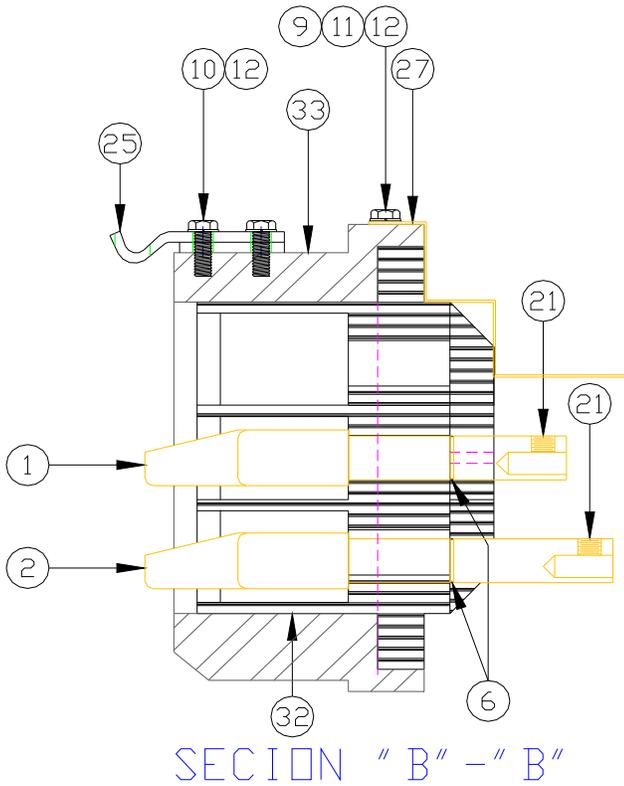

Features

- ✓ Single-piece, high grade insulator
- ✓ Aluminum housing
- ✓ Self-contained cable strain relief and cable grommet
- ✓ Fits both flat and round trailing cables
- ✓ All live exposed parts are completely enclosed by the metal housing
- ✓ Easy to remove sleeve for making cable terminations
- ✓ Minimum effort required to connect or disconnect electrical connections.
- ✓ The ground blade is always the last to break, first to make
- ✓ Ground check circuits make last, break first to insure phase connections are de-energized when connector opens
- ✓ Self-wiping contacts insure good electrical connections after each operation
- ✓ Interchangeable with other industry standard figure 67 plugs
- ✓ Removable ground strap for ground pin isolation