

Houston International Specialty Inc.

Size	5.5
Grade	P110
Weight	26.00


TCBC-HT

Coupling and Pipe Dimensions (in)						
	Outer Diameter	Inner Diameter	Coupling Length	Make-up Loss	Wall Thickness	Drift Diameter
Coupling	6.300	4.548				
Pipe		4.548	8.250	4.125	0.476	4.423
Pin		4.548				


Torque Values (ft-lbs)				
Field End Make-Up			Max. Working Torque ^{1.}	Yield Torque
Minimum	Optimum ^{2.}	Maximum		
15,000	18,400	22,250	29,565	34,600

Yield Stress (x1000 lbs.)	
Tensile	Compressive
826	826

Maximum Pressure (psi)	
Internal	External
16,660	17,400

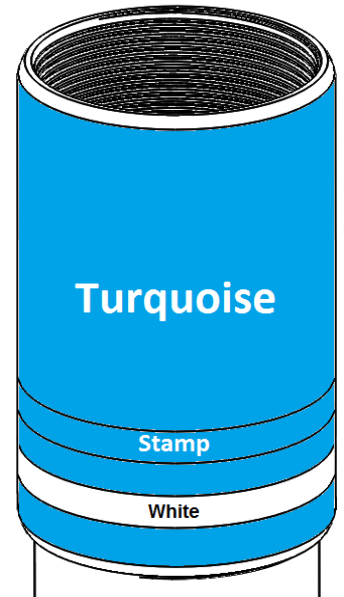

1. Max. Working Torque value is not to be exceeded during operation.
2. If Optimum Torque does not meet the Base of Triangle Stamp, M/U to the Base of Triangle.

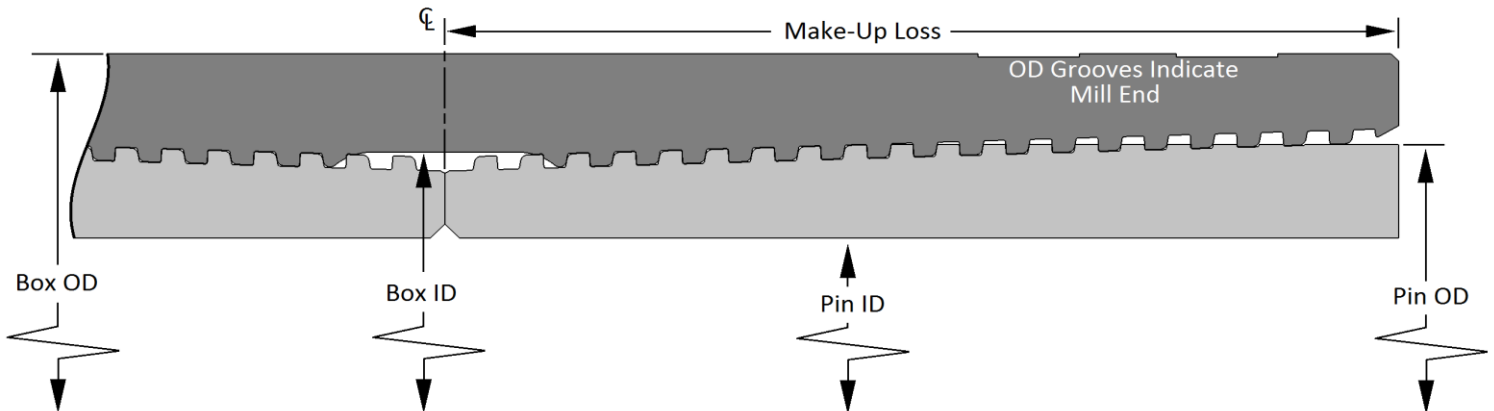

*Data are for information purposes only. Though HIS has made efforts to ensure accuracy, HIS makes no warranty for loss or damage due to its use.

rev A

19996 Hickory Twig Way Spring, TX 77388
 Phone: (281) 602-7550
 Fax: (281) 602-7557