

AN MSF *LEARN TO RIDE* CLASS



# 3-WHEEL BASIC *RIDERCOURSE*<sup>SM</sup>

STUDENT HANDBOOK



MSF TRAINING SYSTEMS

OUR CLASSES ARE SERIOUSLY FUN.

First Printing: February 2010  
Copyright © 2010 Motorcycle Safety Foundation, Inc.

All rights reserved. No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopy, recording, or any information and retrieval system, without permission in writing from the Motorcycle Safety Foundation (MSF). Under no circumstances may the material be reproduced for resale. Please send request in writing to Training Systems Dept., Motorcycle Safety Foundation, 2 Jenner, Suite 150, Irvine, California 92618-3806.

Portions of this book may be reproduced by Motorcycle Safety Foundation certified RiderCoaches solely to facilitate their presenting this MSF 3-Wheel Basic *RiderCourse*<sup>SM</sup>. Under no circumstances may a RiderCoach reproduce this material in its entirety.

The MSF regular Basic *RiderCourse* for two-wheel motorcycles is based on years of scientific research and field experience. The current edition has been field tested and has proven to be successful in developing the entry-level skills for riding in traffic. Through its various iterations, more than five million riders have been trained since 1973. This 3-Wheel Basic *RiderCourse* (3WBRC) is based on the same motor skills and adult education principles upon which the regular Basic *RiderCourse* was developed.

The information contained in this publication is offered for the benefit of those who have an interest in riding three-wheel motorcycles. For the purpose of 3WBRC, three-wheel motorcycles do not include sidecar rigs or scooters with two close-set wheels up front that lean like regular motorcycles. In addition to the extensive research and field experience conducted by the MSF, the material has been supplemented with information from publications, interviews and observations of individuals and organizations familiar with the use of three-wheel motorcycles and training. Because there are many differences in product design, riding styles, and federal, state and local laws, there may be organizations and individuals who hold differing opinions. Consult your local regulatory agencies for information concerning the operation of three-wheel motorcycles in your area. Although the MSF will continue to research, field test and publish responsible viewpoints on the subject, it disclaims any and all liability for the views expressed herein.

Since 1973, the Motorcycle Safety Foundation has set internationally recognized standards that promote the safety of motorcyclists with rider education courses, operator licensing tests, and public information programs. The MSF works with the federal government, state agencies, the military, and others to offer training for all skill levels so riders can enjoy a lifetime of safe, responsible riding. The MSF is a not-for-profit organization sponsored by BMW, BRP, Ducati, Harley-Davidson, Honda, Kawasaki, KTM, Piaggio/Vespa, Suzuki, Triumph, Victory and Yamaha. For *RiderCourse*<sup>SM</sup> locations, call 800.446.9227 or visit [www.msf-usa.org](http://www.msf-usa.org).

<b>Course Introduction</b>	<b>ii</b>	<b>CONTENTS</b>
Course Requirements	2	
Course Structure	2	
<b>Introduction to Three-Wheel Motorcycles</b>		
Types of Motorcycles and Three-Wheel Motorcycles	3	
Risk Awareness	5	
Risk Acceptance	6	
Risk Management	8	
<b>Preparing to Ride</b>		
Personal Protective Gear	10	
Pre-ride Inspection	14	
Routine Maintenance	15	
Controls	16	
Basic Riding Skills Information	19	
Range Safety Rules	24	
RiderCoach Signals	24	
<b>Street Strategies</b>		
Positioning	25	
Being Visible	26	
RiderRadar <sup>SM</sup>	27	
Mental Processing	28	
Common Riding Situations	30	
Maximum Braking and Swerving	37	
Special Situations	39	
Impairments	43	
<b>Wrap-Up</b>	<b>47</b>	
<b>Glossary</b>	<b>48</b>	
<b>Study Questions</b>	<b>51</b>	
<b>Evaluation Form</b>	<b>55</b>	
<b>Quick Tips Tear-out Page</b>	<b>57</b>	

Welcome to the world of three-wheel motorcycles. As a new rider participating in education and training activities, you're about to embark on an adventure that only three-wheel motorcycle riders can know. If you're an experienced motorcycle rider transitioning to the world of three wheels, or a rider with some experience riding three-wheel motorcycles (for purposes of this handbook "3WMC"), you are certain to further your knowledge and skills necessary for riding these exciting vehicles.

3WMC riding can be quite a challenge, not just in learning the controls and acquiring maneuvering skills, but also in finding a safe way through real-world traffic. If you're willing to embark on a journey that develops the special skills and strategies of a good rider, this course is for you. Your experience and participation will lead to a better understanding of the riding maneuvers and the mental skills necessary to enjoy 3WMC riding to the fullest. Through this process, you might even decide that 3WMC riding is not right for you.

This course covers the fundamentals for you to develop your capabilities to become a safe and responsible rider. It provides the opportunity for you to learn the physical and mental skills important for operating a 3WMC. In the classroom, you will learn ways to minimize risk and handle special riding situations. During the riding portions of the 3-Wheel Basic *RiderCourse*<sup>SM</sup> (3WBRC<sup>SM</sup>), you will be coached to develop the physical skills of basic control that include: clutch/throttle control, straight line riding, stopping, turning, and shifting, and then move on to more advanced skills in stopping quickly, cornering, and swerving.

Your RiderCoach(es) are here to help guide you through your learning journey. Be sure to ask lots of questions and let them know how to help you.

The classroom activities include discussions with audiovisual support designed to prepare you with awareness and the knowledge necessary for safe 3WMC riding. The riding exercises foster the development of fundamental skills and the riding finesse to handle most traffic situations. Throughout the course you will have your questions answered and have your progress observed and coached.

Several non-riding training opportunities, though designed for motorcycle riders, are applicable and available to 3WMC riders. These Host-An-Event kits do not require special certification or training. These presently include The *MSF Guide to Group Riding* that provides tips and techniques for safely riding in a group; *Intersection* which acquaints motorists with the characteristics of motorcycling to improve sharing the road; the *Seasoned Rider Kit*, which addresses the effects of aging on motorcycle operation; the *Riding Straight Kit* that provides information about separating the social activities of drinking and riding; and the *Street Smart-Rider Perception Kit*, which improves situational awareness and perceptual skills. You may participate in these opportunities as a student, and when you feel comfortable, you could lead a group of others through the learning activities as a facilitator. Check the MSF Website ([www.msf-usa.org](http://www.msf-usa.org)) under “Host An Event” for details. There you will find information about training opportunities and Best Practices for conducting local seminars.



COURSE  
REQUIREMENTS

To successfully complete this course, you must: 1) attend all sessions, 2) achieve a minimum score on a knowledge test covering course material, and 3) achieve a passing score on a riding-skill evaluation. The riding-skill evaluation consists of four exercises that assess limited-space maneuvering skills as well as braking, cornering, and swerving competencies. Note your course schedule here:

---

---

---

Successfully completing the 3WBRC is not a guarantee that you will be safe on the road. Only you can choose the level of safety you wish to maintain. The course will provide you with the opportunities and experiences to acquire the basic knowledge and skills that enable you to continue to practice and develop your safe riding habits. Safe riding is also a matter of attitude, and only you can provide that.

COURSE  
STRUCTURE

While the topic of three-wheel motorcycle safety is profoundly serious, this course is designed to be quite enjoyable. The primary concerns in this course are your safety and learning. That is a responsibility shared by everyone. RiderCoaches will facilitate your development by using interactive classroom activities. On the range you will be coached in a way that guides your development in acquiring basic three wheel maneuvering skills. You are not competing with anyone else in this course, so focus on your own learning and experience.

The 3WBRC is conducted at a pace that results in successful completion for most novice 3WMC riders. The RiderCoaches will help you learn to the best of your ability. If you have significant difficulty or become a risk to yourself or others, as determined by you or your RiderCoaches, you will not be permitted to continue to ride (other options may be available for developing your riding skills).


Motorcycles have been around since the late 1800s, and they have been used for all sorts of riding activities. There are three basic types of motorcycles: street, dual-purpose, and off-road. Street motorcycles are designed for use on public streets and highways. They have all the equipment for safe and enjoyable street operation. Street motorcycles come in several different styles, including touring, cruiser, sport, standard, and scooters. It is these types of motorcycles that frequently form the foundation for many three-wheelers. Additionally, there are dual-purpose motorcycles equipped for use on the street and off-road trails, and off-road motorcycles that are not street-legal and are typically used for recreational or competitive use.

## TYPES OF MOTORCYCLES & THREE-WHEEL MOTORCYCLES


### Street Motorcycles



Touring

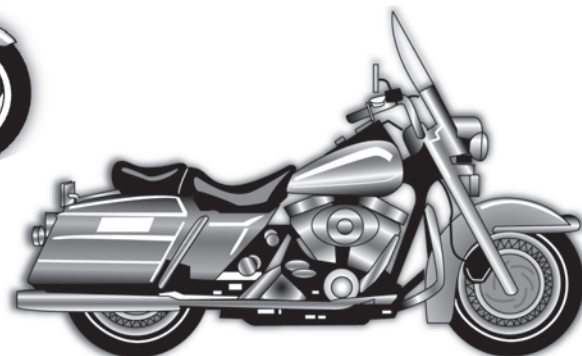


Cruiser

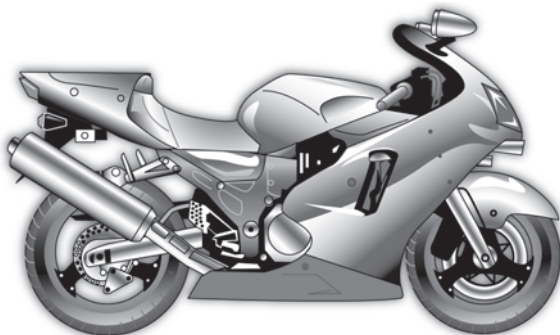

Sport




Standard

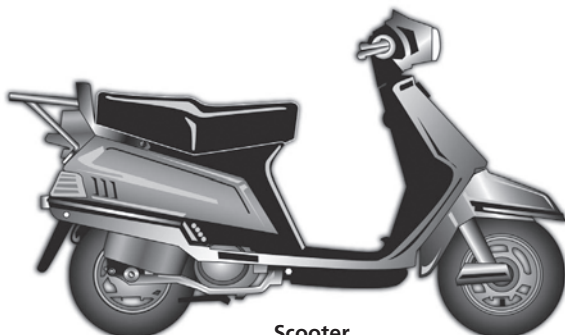

Scooter


# INTRODUCTION TO 3-WHEEL MOTORCYCLES

## Dual-Purpose Motorcycle

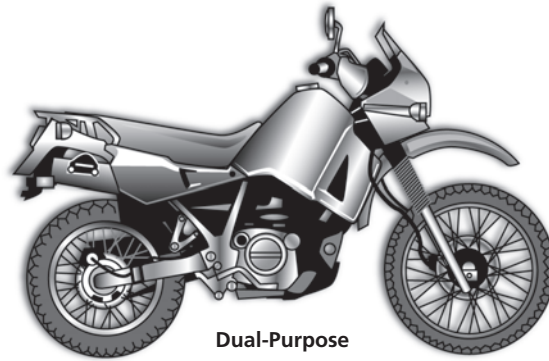


Dual-Purpose

## Off-Road Motorcycles

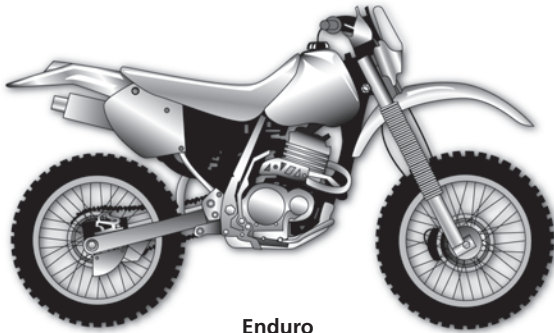

**Enduro**  
(Recreational trail riding)

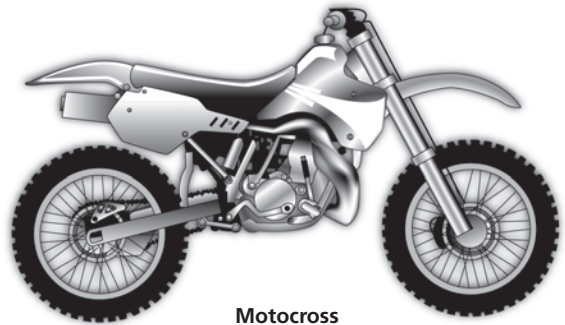

**Motocross**  
(closed-course competition)



**Trials**  
(low-speed skills competition)

3WMCs are wider than a two-wheel motorcycle and come in many different designs and configurations. The most important difference is the arrangement of the wheels: some have two wheels up front, and some have two wheels in the rear. On some three-wheelers the chassis or body leans in corners, but on others the wheels lean independent of the body. A great many 3WMCs are built by installing rear axle kits on a motorcycle. There are even 3WMCs that have enclosed riding compartments. During this course we will only be discussing and using 3WMCs that are of a basic "motorcycle" design. They may have two wheels in the front or the rear, but those wheels must be in a three-track orientation (leave three separate tracks) as opposed to a two-track orientation such as a motorcycle equipped with a sidecar. Also, they will be controlled using handlebars and controls similar to motorcycles, as well as a saddle that is straddled by the operator. If equipped for a passenger, the passenger must be seated behind the operator.




# INTRODUCTION TO 3-WHEEL MOTORCYCLES

For specific information about a particular 3-wheel motorcycle, be sure to check with the manufacturer or dealer. You can also review the vehicle's owner's manual.



**Dual Rear Wheels**

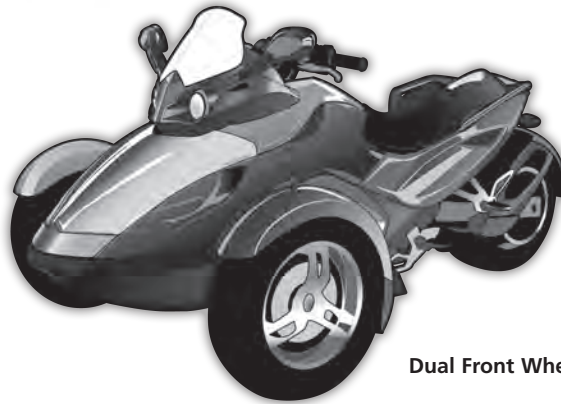

**Dual Front Wheels**

## **3WMC Motorcycles**

Riding a 3WMC involves some risks not encountered when driving cars and trucks. Even though they are more stable than 2-wheel motorcycles in a straight line, 3WMCs do not have the stability of cars during cornering and may roll over. You are also more vulnerable in a crash because there is no compartment for your protection. 3WMCs are not as readily seen as cars, trucks, or other motor vehicles because of their size. Many motorists, particularly those who don't ride a 3WMC or a motorcycle, may not be looking for these vehicles in traffic. This places you at risk, particularly at intersections.

A good question to ask is "How good am I as a car driver?" Most car drivers rate themselves above average when asked. But no one is perfect, and there is always room for improvement. Striving for excellence is one of the more challenging aspects of being a 3WMC rider. No one expects to become a crash statistic. But the reality is that car drivers and motorcycle-type vehicle riders are involved in thousands of crashes each year.

Many riders say they are better, more alert car drivers because they have learned to be more attentive in traffic. Not all risks are due to the rider's own behavior. While it is possible to reduce much of your own risk, safety in traffic is a responsibility shared by everyone.

## **RISK AWARENESS**

## RISK ACCEPTANCE

Have you ever thought about how much risk you accept? We each live with the results of our decisions, and we have full responsibility for the actions we take in traffic. A person who has several “close calls” or near misses when driving a car may be prone to similar behavior when operating a 3WMC. It’s something to think about....

People take a variety of risks every day, but some take more risks than others. For instance, imagine a “ladder of risk.” Picture a tall ladder reaching to the top of a building. For an experiment, would you climb up on the first rung and jump off to the ground? How about the second rung? Third? Do you know anyone that would climb up to a rung higher than you and jump onto the ground? Some people are higher risk takers than others, but the important point is to think about the risks you are willing to take. Only when you think about the risks of riding in traffic can you effectively manage the variety of factors that happen while riding.


Once you become aware of the risks associated with 3WMC riding, and once you accept that risk, it is time to learn how risks can be managed. Choosing to accept the challenges of being a responsible 3WMC rider means to think about the consequences of your riding behavior in traffic. It also means accepting personal responsibility for the results of your decisions and actions, as well as developing good skills and judgment.

Knowledge of what causes crashes is helpful in managing the complexity of riding situations. How would you answer this question: “What is the primary cause of 3WMC crashes?” There are several ways to answer. Perhaps you thought of such things as speeding, inattention, distraction, drinking, or carelessness. All are good answers. Read the following crash scenario, and see if you can determine the primary cause of the crash.


*A 3WMC rider is cruising a country road at 5:00 p.m. in the afternoon, heading home after finishing a grueling day at work. Still thinking about some of the projects not finished that will have to get completed tomorrow, the rider rounds a slight curve in the road and approaches an intersection. There is a car on the right and the 3WMC rider thinks about slowing. Suddenly the vehicle pulls out. The rider tries to swerve around the car to the right, but the car stops in the middle of the lane. A tire of the 3WMC hits the left rear of the car and sends the 3WMC out of control and into the ditch along the road. The helmet saved the rider’s head, but the rider’s knees were bruised, and the 3WMC couldn’t be ridden. Investigation showed that the car driver was a young person without a license, who was distracted by the glare of the setting sun. There was no alcohol involved and no one was speeding.*

What was the primary cause of this crash? Since there were multiple factors, it is difficult to determine the primary cause. So the lesson in this crash, as in most crashes, is that there is rarely a single cause. There is usually an interaction of factors that accumulate, and at some point in time they come together in such a way to produce a crash. Many safety professionals do not like to use the word “accident” since most crashes are predictable and preventable.

How could the above crash have been prevented? Would a cloudy day have prevented the sun glare from partially distracting the young driver? Should the car driver have paid more attention? Should that driver have been behind the wheel in the first place? Would a better prediction by the rider have provided that extra moment to stop or swerve to miss the car? If the rider had been less distracted by the events of the day, would the rider’s response have been quicker? Remove just one factor, and this traffic conflict may not have developed into a crash.

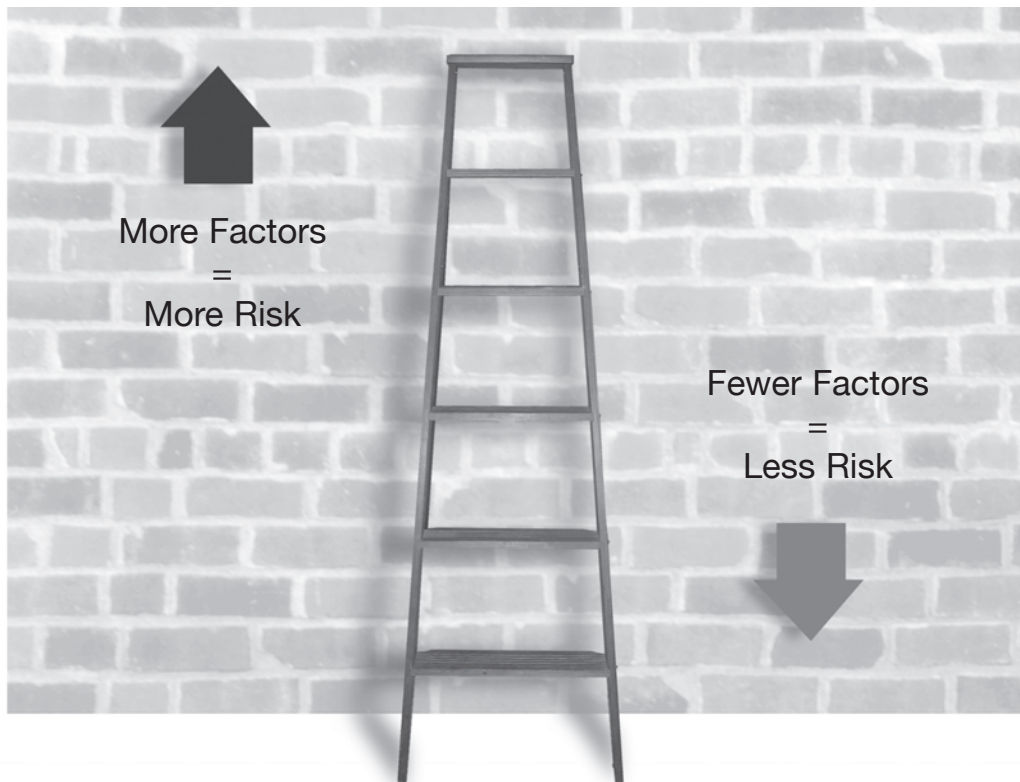

**Ladder of Risk.** Each rung of the ladder represents a factor. More factors result in more risk; fewer factors result in less risk. Good riders keep the number and significance of factors in check.

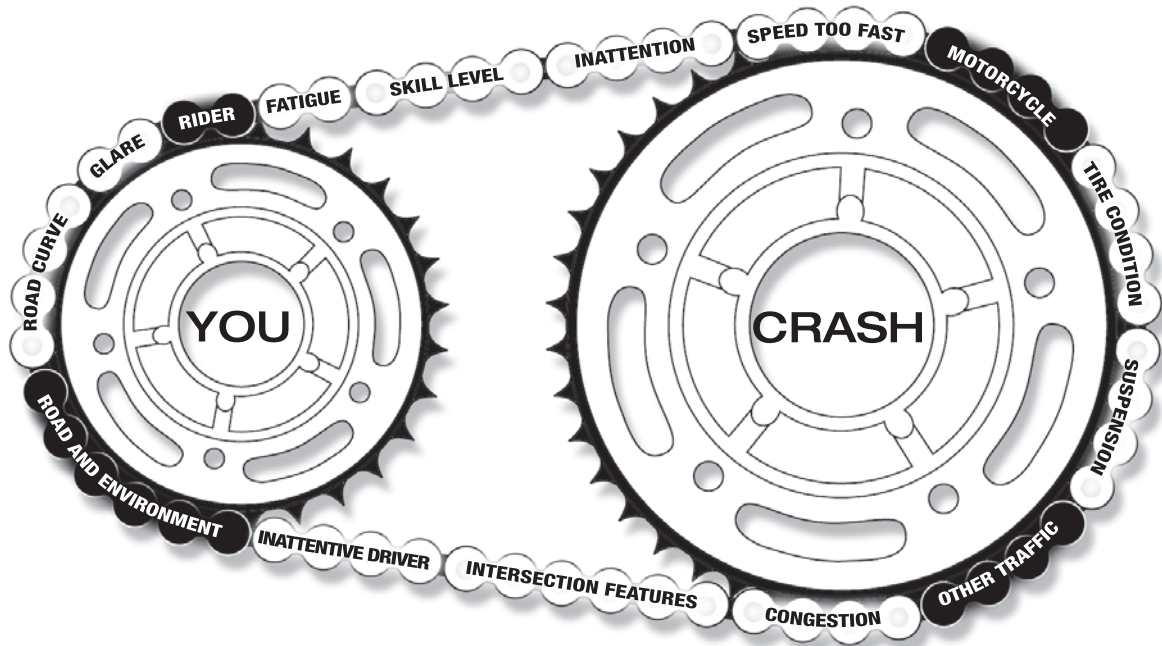

## Crash Chain

Here's one time when breaking a chain is a good thing. In this diagram, factors from four categories (dark links) interact to form a chain of events that link you to a crash. Removing just one factor breaks the chain and may prevent the crash. To what degree do you control each of these factors?

One way to think about the causes of crashes is to imagine a crash chain. Crashes occur because factors interact and develop into a hazardous situation.

Have you ever had a close call while driving? What kept it from becoming a crash? Usually someone took action to prevent it. Good riders are ready to take action to minimize factors and maintain a margin of safety.

Hazards are everywhere, and good riders will be quick to notice what's going on all around them. Hazards can be anything from road debris, to sun glare, to other traffic. Sometimes one factor alone is hazardous and sometimes it takes several factors to produce trouble. Look for ways to break the crash chain of events. Sometimes removing just one factor prevents a crash, but continuously keeping the number of factors to a minimum is a good way to manage your risk.

## RISK MANAGEMENT

What do you think of when asked, "What is a good 3WMC rider?" Is it one who obeys the laws? Is it one who has superior riding skill? Is it a rider who can negotiate curves fast? Is it one who rides slow and anticipates hazards? Is it one who doesn't crash?

Whatever your definition of a “good 3WMC rider,” a key element for a good rider would be to have the desire and motivation to choose to reduce risk while riding. It takes superior riding skill; and of course, a positive mental attitude helps. But a fundamental trait of all good riders is that they have a strategy, a way of thinking and planning to avoid trouble.

A good rider reduces factors that lead to problems by applying a STRATEGY. Responsible 3WMC riding is more than just having good skill, and more than simply having a good attitude. It means thinking before acting. It means considering the consequences of actions. This is the mindset that helps to reduce risk.

All physical activities have an element of risk. It is important to recognize that risks can seldom be completely eliminated, but they can usually be managed or minimized. One of the surest ways to manage risk is to first be aware of the potential risks, and second to have a specific plan for minimizing the risks.

Being aware of risk means thinking about your safety margins. For the purposes of this course, a safety margin refers to: (1) staying within personal skill limits; (2) staying within your 3WMC’s limits, especially its tire traction limits; and (3) staying within the available time and space to respond to traffic situations before having to react to an emergency.

**SEE<sup>SM</sup>** — a simple and powerful strategy of MSF — is to **S**earch, **E**valuate, **E**xecute. It is the strategy to help you understand what is going on in traffic and to be constantly planning and implementing a course of action. To SEE is to Search for factors that might lead to risky situations, to Evaluate how the factors might interact to create risk, and to Execute an action to maintain a margin of safety. To SEE is to ask yourself such questions as: What’s the other person going to do? What if that driver doesn’t see me? What if there’s gravel in that curve ahead? What if that car doesn’t yield the right-of-way at that intersection? These everyday riding situations have something in common: if a strategy for dealing with them isn’t employed, they can easily lead to a crash. To put it simply, you must continually **SEE**.

MSF's **SEE<sup>SM</sup>** Strategy:  
**S**earch  
**E**valuate  
**E**xecute

As you develop 3WMC riding skills in the riding exercises, which is similar to mixing with other people on road, apply the SEE strategy to give yourself time and space. It works anywhere, and can help to ensure your safety and the safety of others.

Getting ready to ride is a matter of being responsible about preparation. It is important to know how to prepare yourself and your 3WMC, and to take the action steps to ensure a safe and enjoyable ride. It has a lot to do with making good choices and the right decisions.



### PERSONAL PROTECTIVE GEAR

Personal riding gear can provide comfort, increase visibility, and offer protection. The right gear helps you stay comfortable and provides improved visibility if it is brightly colored and reflective, and can provide protection against the elements in all kinds of riding conditions. And in the event of a crash it may prevent or reduce injuries.

Most recreational activities and sports have their own protective clothing and equipment. 3WMC riding is no exception, but most of the protective gear a 3WMC rider will find will be designed for motorcyclists, and is perfectly suitable for the 3WMC rider. Every 3WMC rider and passenger should wear sturdy over-the-ankle footwear with non-slip soles, long pants, a good jacket, full-fingered gloves and, above all, a helmet manufactured to meet Department of Transportation (DOT) standards with proper eye protection.

### HELMETS

Helmets work well in accomplishing their intended function to protect the head and brain from injury. Some myths about helmets are that they cause neck injury, block vision, or impair hearing. However, helmet effectiveness has been confirmed by research, not just in the laboratory, but by decades of actual crash analysis as well. Be sure to choose a good helmet and wear it every time you ride.

### Helmet Construction

There are four basic components of a DOT-compliant helmet that work together to provide comfort and protection. They are: 1) an outer shell, 2) an impact-absorbing liner, 3) comfort padding, and 4) a retention system.

The outer shell, often made of fiberglass, molded plastic, or polycarbonate composites, is a tough substance designed to keep sharp or hard objects from penetrating into the head, and to absorb impact energy by deforming. Impact damage may not be visible to the eye. So if a helmet takes an impact, it should be inspected and replaced as necessary.

The liner is usually made of impact-absorbing polystyrene. It is a dense layer that cushions and absorbs shock. It works in unison with the outer shell, and together they offer a lot of protection. They spread the forces of impact throughout the helmet. The more impact energy that is deflected or absorbed, the less there is of it to reach the head and brain.



Cross-Section

The comfort padding is the soft foam and cloth layer that rests next to the head. It helps maintain comfort and fit. In some helmets, this padding can be removed for cleaning.

The retention system, most commonly a chinstrap with D-rings, is very important. It keeps the helmet on your head in the event of a mishap. Unless it is secured, the helmet can fall off and leave your brain less protected.

## Choosing a Helmet

While color, design and price will be a part of your decision about the helmet to buy, protection should be the first consideration. A full-face helmet gives the most protection since it covers all of the head and face. This design has a flip-up face shield that protects the eyes.

A three-quarter or open-face helmet can also offer protection. It is made with the same basic components, but doesn't offer the face and chin protection of full-face helmets. If you wear an open-face helmet, you should use a snap-on face shield or a pair of goggles. Ordinary glasses or sunglasses are not sufficient eye protection for a 3WMC rider. They can shatter or fly off, and they allow wind and airborne objects to reach the eyes.

Helmets are available in many price ranges. One look around most any motorcycle shop helmet display shows that nearly any color, decoration, and design you could want is available. Consider a bright color and adding some reflective material to the helmet to help others see you.

The way to find a well-made helmet is to look for the DOT sticker inside or outside the helmet. The sticker means the helmet is designed to meet safety test standards required by federal law for all helmets sold in the U.S. There may also be a Snell Memorial Foundation sticker, which indicates that a helmet has passed Snell safety tests.

Since head injuries account for the majority of motorcycle deaths, head protection is vital. The best helmet is no guarantee against injury, but studies indicate that helmet use reduces the risk of brain injury by 67 percent.\*

Most manufacturers will provide detailed instructions for helmet care. Generally, use only the mildest soap and avoid petroleum-based solutions that can break down helmet materials. Try not to place your helmet where it could fall to the ground and cause damage.

\*NHTSA 2004 "Traffic Safety Facts" report.



**Three-Quarter or  
Open-Face**



**Full-Face**

### EYE AND FACE PROTECTION

Any 3WMC rider who has been hit by a stone or an insect while riding can tell you about the benefits of face protection. Windscreens and eyeglasses, even if legal eye protection in your state, may not provide adequate face and eye protection. Wind, insects, dust, and pebbles will be blown behind a windscreen. Eyeglasses with shatterproof lenses may protect the eyes, but may not seal out wind and dust that makes eyes water. Helmets providing full-face coverage provide the best protection.

#### Face Shields

Face shields come in a variety of designs to fit most any helmet. Some flip up for convenience. When using a face shield, be sure it is securely fastened to the helmet. It should be impact-resistant and free from scratches. Scratches can refract light and blur vision. Face shields can be cleaned with a mild solution of soap and water or with a quality plastic cleaner. Make sure that the face shield you choose is designed for your helmet and does not interfere with eyeglasses or sunglasses. Tinted shields are for daytime use only. Always wear a clear shield when riding at night or in conditions when light levels are low.

#### Goggles

Riders who wear goggles have good eye protection, but they are not protected from possible injuries to other areas of the face. Also, goggles can reduce peripheral vision. Goggles are worn over the helmet and should be securely fastened so they do not blow off.

As with face shields, the lenses of goggles should be clear when riding at night or in conditions when light levels are low.

### OTHER RIDING GEAR

#### Footwear

Sturdy over-the-ankle boots help protect 3WMC riders from a variety of riding hazards, such as stones that get thrown up from the roadway. They also prevent burns from hot exhaust pipes. Rubber-soled boots with low heels help keep feet on the footrests. In the event of a crash, boots can provide valuable protection against foot and ankle injuries.

#### Gloves

Full-fingered gloves protect hands from the wind, sun, heat, and cold. Gloves that fit snugly will improve grip on the handlebars as well as help reduce hand fatigue. Sturdy, reinforced motorcycle-style gloves help protect hands in the event of a fall. They have

seams on the outside to prevent irritation, and are curved to provide a natural grip when curled around the handgrips.

If gloves are too bulky, it may be difficult to operate the controls. If gloves are too tight, circulation could be restricted. Gauntlets keep cold air from going up sleeves and protect the wrists. Lighter gloves are good for summer, while heavier, well insulated gloves are best in the cold weather.

## Jackets, Pants, Riding Suits

Quality protective gear will provide comfort in all conditions, and it can help you avoid being distracted by adverse environmental elements. In case of a crash, good quality protective gear may prevent or reduce injury.


Protective gear sold specifically for motorcycling will provide the best combination of fit and protection. These garments are designed to fit while sitting in a riding position. They are cut longer in the sleeves and legs and are fuller across the shoulders. Flaps and fasteners seal out the wind while extra padding provides protection. Riding suits are available in both one-piece and two-piece sets.

Leather is a good choice because it is durable, wind-resistant, and provides protection against injury. Other abrasive-resistant protective gear made of a synthetic fabric is also a good choice. Wide-flared pants, flowing scarves and similar items should be avoided because they could become entangled in the 3WMC.

Protective gear should fit comfortably without binding. A jacket with a zippered front will be more wind resistant than a jacket with buttons or snaps. A flap of material over the zipper of a jacket gives additional protection against the wind and protects your 3WMC's paint from scratches. Jackets with snug cuffs and waist are recommended to keep wind from blowing in. Caution: a large, loose collar can flap when riding and may irritate skin or be a distraction.

In cold-weather riding, protect yourself against hypothermia. Hypothermia, a condition of subnormal body temperature, can cause loss of concentration, slowed reactions, and loss of smooth, precise muscle movement. In such conditions, proper protective gear like a windproof jacket and insulated layers of clothing are essential.

As an example, on a chilly day (50 degrees Fahrenheit) riding at a speed of 30 mph causes a chilling effect equivalent to 42 degrees on exposed skin.

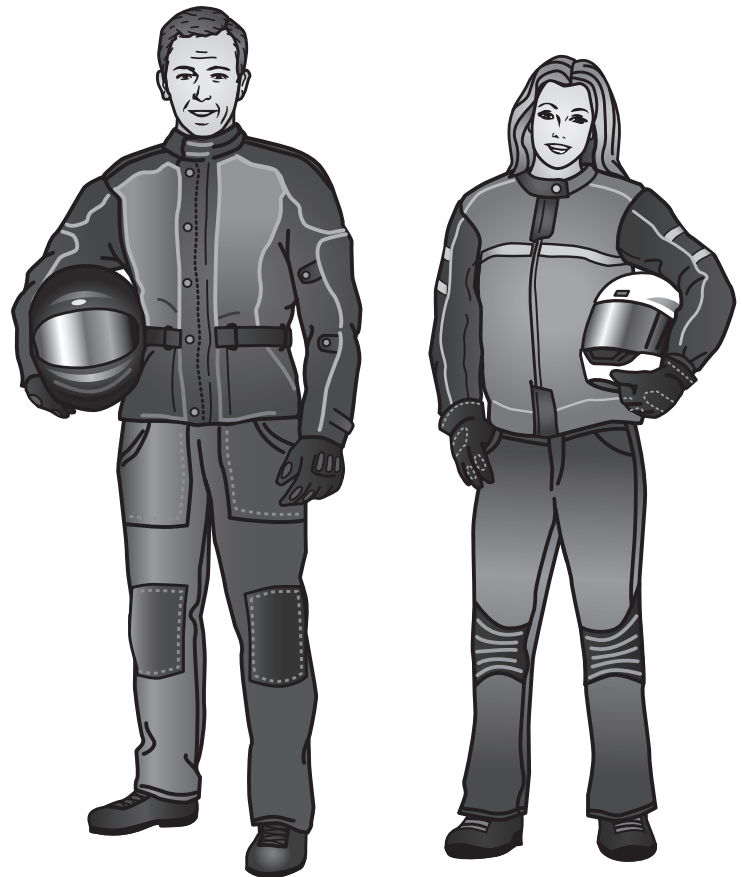

Well-Dressed Riders

**In hot-weather riding, protect yourself against heat exhaustion. Heat exhaustion, characterized by dizziness and headache, can affect clear thinking and concentration. Dressing for hot weather riding requires protective gear that breathes, and riders should drink plenty of water.**

Protective gear that is appropriate for cold-weather riding may be too hot when stopped. It is wise to dress in layers so that layers can be removed as desired. Extra pants, shirts, and jackets can be layered underneath your protective gear to help body heat form a warm insulation. Topping the protective gear with a windproof outer layer can prevent cold air from reaching the skin.

The protective gear worn while riding can also help a 3WMC rider be more visible. Wearing bright colors is a wise choice. If a dark jacket is worn, an inexpensive reflective vest can be worn over it. It is a good idea to put extra reflective tape on garments worn regularly while riding.

### Rain Suits

For the avid rider, a rain suit or a waterproof riding suit is a must. A dry rider will be much more comfortable and alert than a rider who is wet and cold. One- or two-piece styles are available, and those designed specifically for motorcycling are best. High visibility orange or yellow colors are good choices. A feature to look for is elastic in the waist, pant legs, and sleeves. The jacket should have a high collar, zip up and have wide flaps across the opening. When purchasing a rain suit, consider adding waterproof gloves and boot covers.

### Hearing Protection

Riding exposes you to wind noise. Long-term exposure to wind noise can cause hearing damage. Properly worn hearing protection reduces noise and makes your ride more enjoyable, and allows you to hear important sounds like car horns and sirens. You can choose from a variety of styles, from disposable foam plugs to reusable custom-molded devices. Make sure you are in compliance with state laws when using any hearing protection.

## PRE-RIDE INSPECTION

Pre-ride inspections help ensure a trouble-free ride and provide confidence that your 3WMC will respond properly. The primary source of information about how a 3WMC should be inspected and maintained is its owner's manual. Be sure to absorb all of its important information. A 3WMC will continue to ride like new if it is properly maintained and routine inspections are frequent.

A pre-ride inspection of the 3WMC should be as routine and automatic as checking the weather forecast before heading out for the day. It's quick and easy to check the critical components, and a convenient reminder developed by MSF is T-CLOC<sup>SM</sup>. To the right is a chart of T-CLOC inspection items, all of which should be checked before every ride.



## **T — Tires and Wheels**

- Air pressure
- Tread
- Cracks, dents, loose spokes
- Bearings
- Brakes

## **C — Controls**

- Levers
- Switches
- Cables
- Hoses
- Throttle

## **L — Lights and Electrics**

- Working condition
- Mirrors

## **O — Oil and Other Fluids** (coolant, hydraulic fluid, fuel)

- Levels
- Leaks

## **C — Chassis**

- Suspension
- Drive components (chain, belt, or driveshaft)

A pre-ride inspection should not take more than a few minutes. If done before every ride, it can help you identify changes before they become a problem. A more detailed tear-out reference page on T-CLOC inspection is provided at the end of this book.

Routine maintenance goes beyond a pre-ride inspection. Regular maintenance is as important for a three-wheel motorcycle as routine checkups by your doctor are for you. Wear and tear is normal with use, and routine maintenance will help prevent more costly corrective maintenance. The schedule for regular upkeep for 3WMC parts and controls is contained in your 3WMC's owner's manual. Remember, a mechanical failure caused by neglect in an automobile may only be an inconvenience. The same failure on a 3WMC may result in having to leave your 3WMC parked on the side of the road.

## ROUTINE MAINTENANCE

### CONTROLS

Both hands and both feet are used in operating and controlling a 3WMC. It is important to know the location and operation of all of your 3WMC's controls, and to develop and practice smooth and precise coordination when using them.


#### PRIMARY CONTROLS

The handlebars are an important component of any 3WMC and are needed for turning. Here are other primary controls found on a typical 3WMC, the ones that make it go and stop.

**Throttle:** It is the right handgrip and it controls engine speed. To increase engine speed, "roll" the throttle toward you. To decrease engine speed, "roll" the throttle away from you. The throttle should rotate back to the idle position when released.

**Clutch Lever:** The clutch lever is located in front of the left handgrip. It is operated with the fingers of the left hand. The clutch connects power from the engine to the rear wheel or wheels. "Squeeze" the lever in to disengage and "ease" the lever out to engage. Important: squeezing the clutch lever is usually the first step to re-gain control of an out-of-control 3WMC.

**Gearshift Lever:** It is found on the left side of the 3WMC in front of the left footrest and is operated with the left foot. "Lift" up fully to go to a higher gear; "press" down fully to go to a lower gear. It shifts one gear with each lift or press. When the lever is released, it returns to center where the mechanism resets for the next shift up or down. A typical gear pattern is 1-N-2-3-4-5. The N is for neutral, which is selected by either a "half lift" from 1st gear or a "half press" from 2nd gear. Most 3WMCs have five gears, but some have four or six gears, or even an automatic transmission and/or a reverse gear. Consult your owner's manual for more information about your 3WMC's transmission.

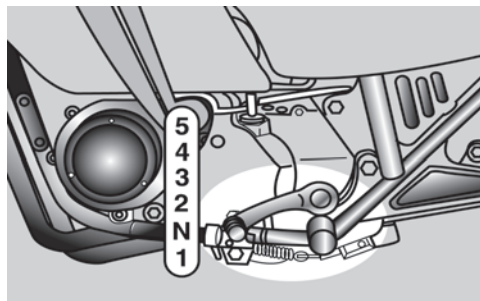

**Brakes:** Although most 3WMCs have conventional, motorcycle-style brakes (separate front and rear brake controls), some may have other designs. Consult your owner's manual for more information on your 3WMC's braking system.

**Front Brake Lever:** It is found in front of the right handgrip and is operated with the right hand. "Squeeze" it in to operate.

**Rear Brake Pedal:** It is found in front of the right footrest and is operated with the right foot. "Press" it down to operate.

**Combined Foot-Actuated Brake Pedal:** It is found in front of the right footrest and is operated with the right foot and will actuate all brakes simultaneously. "Press" it down to operate.

## OTHER CONTROLS AND EQUIPMENT

The location and operation of many of these other controls/equipment vary from model to model. The best source of information for your 3WMC is its owner's manual.

**Fuel Supply Valve:** If your 3WMC has one, it is usually under the fuel tank and is operated with the left hand. It controls the flow of gasoline to the engine. Most 3WMCs have one, but some are fully automatic and some may not be accessible to the 3WMC rider. For manually operated valves, the positions are ON, OFF, and RESERVE. The RESERVE position permits access to a small amount of remaining fuel, which can be used to ride a short distance to a filling station after the main supply has been exhausted. Some valves may be vacuum operated and will have different positions. Check your owner's manual for specific information on the fuel valve for your 3WMC.

**Ignition Switch:** It is usually located near the instrument cluster. Its positions often include ON, OFF and LOCK, and some include a PARK position. The LOCK position allows the key to be removed and engages a steering-lock mechanism. The PARK position is a LOCK position that also sends power to the taillight to provide visibility when parked on a roadway at night. The switch may also have an accessory position.

**Choke Control:** If the 3WMC has one, it is located either on or near the handlebars, or on or near the engine. It provides an enriched fuel mixture to assist in starting a cold engine, and provides a fast idle to permit the engine to warm quickly. It should be turned OFF as soon as the engine is warmed.

**Engine Cut-off Switch:** It is near the right handgrip and is operated with the right thumb. It allows you to shut off the engine without removing your hand from the handlebar.

**Turn Signal Switch:** It is usually located near the left handgrip and is operated with your left thumb; most must be manually turned off after a turn or lane change, but some turn off automatically after a turn.

**High/Low Beam Switch:** It is usually located near the left handgrip and is used to select high or low beam for the headlight.

**Horn Button:** It is usually located near the left handgrip and is operated with your left thumb.

**Starter Button:** It is usually located near the right handgrip, and is operated with your right thumb.

**Speedometer:** It is part of the instrument cluster and shows the 3WMC's road speed. An odometer shows miles ridden, and a re-settable trip meter is often included.


**Tachometer:** If there is one, it is part of the instrument cluster and indicates engine speed. It has a "red line" that should never be exceeded.

**Indicator Lights:** These can include neutral, high beam, turn signal indicators, oil pressure, and possibly others.

## MOTORCYCLE CONTROLS

Name \_\_\_\_\_ Date \_\_\_\_\_

Identify the controls and indicators of a typical 3WMC by placing the number from the illustration beside the control name. Practice locating each control on your own 3WMC until you can find it without looking.

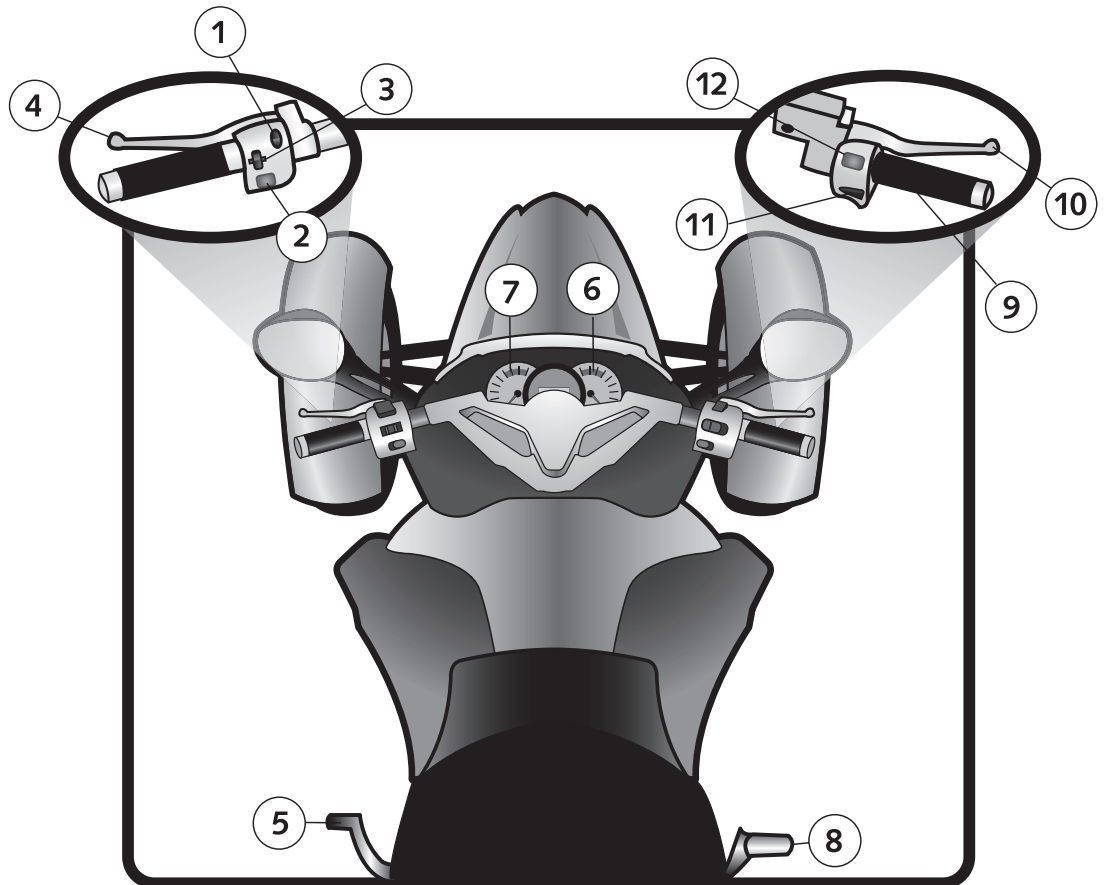

Electric Starter	_____	Gear Shift Lever	_____
Turn-Signal Switch	_____	Clutch Lever	_____
Engine Cut-Off Switch	_____	Tachometer	_____
Speedometer & Odometer	_____	Front Brake Lever (if equipped)	_____
Throttle	_____	High/Low Beam Switch	_____
Horn Button	_____	Rear Brake Pedal (on some models, activates all brakes)	_____

## STARTING AND STOPPING THE ENGINE

Here are a few of the basic procedures to help you on the range.

A procedure called FINE-C is used to start the engine. It stands for **F**uel, **I**gnition, **N**eutral, **E**ngine cut-off switch, and **C**hoke/**C**lutch.

**Fuel Supply Valve:** Turn the fuel valve ON (“vacuum” valves do not have an “off” position).

**Ignition:** Turn the ignition switch to the ON position. The indicator lights should come on.

**Neutral:** Shift the transmission to NEUTRAL; check to be sure by rolling the 3WMC with the clutch lever released and front brake released (don’t rely on the green light in the instrument cluster).

**Engine Cut-Off Switch:** Put the switch in the RUN/ON position.

**Choke/Clutch:** Set the choke as needed (ON for a cold engine). Some 3WMCs require that the clutch lever be squeezed before the starter will operate. Even if this is not required, it is a good habit to squeeze the clutch lever as a precaution against starting in gear, just in case Neutral has not been selected prior to starting.

To start the engine with an electric starter, press the starter button. When using the choke to start a cold engine, avoid using the throttle. Even a slight amount of throttle may prevent the engine from starting. Some 3WMCs have a safety mechanism that prevents the 3WMC from starting if the clutch is not squeezed.

To stop the engine, move the engine cut-off switch to OFF. Do this every time so you can reach the switch quickly if you need to. Turn the ignition switch to OFF. Also, turn the fuel valve to OFF if your 3WMC has a manual valve.


## BASIC RIDING SKILLS INFORMATION

Engine Start Procedure	Engine Stop Procedure
<b>(FINE-C)</b>	<b>(Thumb/Key/Valve)</b>
F – Fuel Supply Valve	Engine Cut-off: <i>Off</i>
I – Ignition	Ignition
N – Neutral	Fuel Supply Valve
E – Engine Cut-off: <i>On</i>	
C – Choke/Clutch	



### USING THE FRICTION ZONE

The friction zone is that area in the travel of the clutch lever that begins where the clutch starts to transmit power to the rear wheel and ends just before the clutch becomes fully engaged. It is a region of partial engagement in which the clutch “slips” to permit you to precisely control engine power to the rear wheel. Proper use of the friction zone is one of the most important skills you must develop as it is how riders get moving smoothly from a stop.

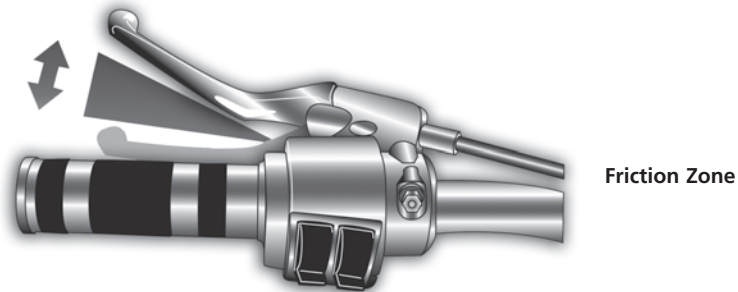

### RIDING POSTURE

Good posture helps you maneuver the 3WMC more easily. Keep your back straight, and head and eyes up. Keep both feet on the footrests near the controls. Keep the knees and elbows comfortably in. Arms should be relaxed and bent. The wrist should be positioned flat on the throttle. On your first riding day during this *RiderCourse*, do not cover the front brake lever. Keep all four fingers around the throttle until there is a need to apply the brake for stopping or slowing.



## TURNING

Making a turn while riding involves three primary steps: slow, look, and steer. Although in reality these may not be distinct steps, they make a good starting point for learning to ride smoothly and safely through turns, corners and curves. Making good turns takes proper judgment and good timing.


**Slow:** Reduce speed as needed before entering a turn. This is accomplished by rolling off the throttle and/or using the brakes. Sometimes downshifting to a lower gear is necessary. The important point is to set up for the turn by establishing a good entry speed, which is a speed that won't require you to slow further while in the turn.

**Look:** Search throughout the entire turn and keep your eyes moving. Evaluate the entire turn as soon as possible—surface characteristics, sharpness of the turn, and overall traffic conditions—so you have time to make decisions about speed and position. Sometimes turning your head in the direction of the turn helps to keep a good visual picture.

**Steer:** To initiate the actual turn, use the push/pull technique to point the front tire(s) in the direction of the turn. Pushing forward on right grip while pulling on the left handgrip will turn the 3WMC to the left. Pushing forward on left grip while pulling on the right handgrip will turn the 3WMC to the right.

A slight roll on the throttle will help you to keep from losing speed as well as setting you up for an upcoming straightaway.

When turning sharply or at higher speeds, you may be more comfortable if you lean toward the inside of the turn to balance the turning force. In slow, tight turns like a U-turn in a parking lot, steer the handlebars to the full-lock position and turn your head and look to the area where you want to go.

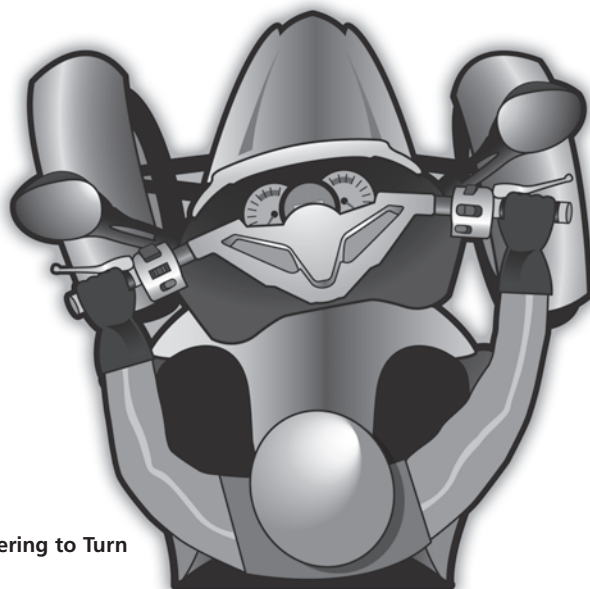

Using Push-Pull Steering to Turn

### SHIFTING

You must change gears to match the engine speed with road speed. Lower gears are used for lower speeds and higher gears are used for higher speeds, just like on a manual transmission car or truck.

**Shifting to a higher gear:** This is done as speed increases to a point where shifting is desired to match engine speed to road speed.

Shift up soon enough to avoid overrevving the engine, but not so soon as to cause the engine to lug due to engine speed being too low for road speed.

**Use a 3-step process:** 1) Roll off the throttle as the clutch lever is squeezed, 2) lift the shift lever firmly as far as it will go, 3) smoothly ease out the clutch and adjust the throttle. Once the shift is completed, release the shift lever to permit it to reset for the next shift.

**Shifting to a lower gear:** This is done to match the engine speed with road speed or to have more power to accelerate. Be sure the 3WMC's speed is low enough for the next lower gear so as not to overrev the engine.

**Use a 3-step process:** 1) Roll off the throttle as the clutch lever is squeezed, 2) press the shift lever down firmly, 3) ease out the clutch lever as you roll on the throttle. Once the shift is completed, release the shift lever to permit it to reset for the next shift. Rolling on the throttle slightly while smoothly easing out the clutch lever can help the engine come up to speed more quickly and make the downshift smoother.

Shifting to a lower gear causes an effect similar to using the brakes. This is known as engine braking. To use engine braking, shift down one gear at a time and ease out the clutch lever through the friction zone between each downshift. Keep the clutch lever in the friction zone until the engine speed stabilizes. Then ease out the lever fully until ready for the next downshift.


Usually you shift gears one at a time, but it is possible to shift through more than one gear while the clutch lever is squeezed.

## STOPPING


To stop with 3WMCs that have independent front and rear brakes, the hands and feet work together in a coordinated and smooth fashion. Squeeze the clutch lever and the front brake lever while pressing on the rear brake pedal and downshifting to first gear. Both brakes should be applied at the same time when stopping. Even though the full braking potential of each wheel may not be required for normal stops, it is important to develop the habit of using both brakes so that your reflexes will be ready to respond quickly and properly when an emergency situation occurs.



Rear Brake Only

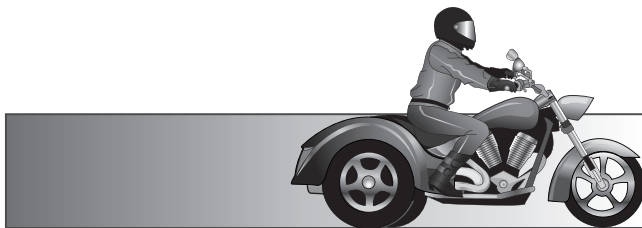

Front Brake Only

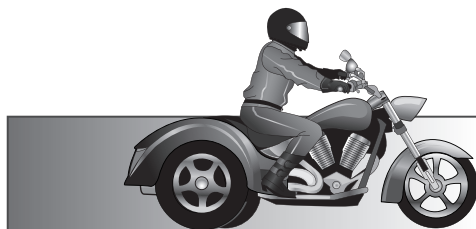

Both Brakes

Be sure to develop your braking skills gradually. Learn to make smooth, controlled stops before practicing quick stops. It is important to have a good sense of touch when using the front brake lever and rear brake pedal. Too much pressure too quickly could cause a skid and loss of control.

For 3WMCs that do not have independent brakes, such as a single brake pedal that operates both front and rear brakes, it is still important to make smooth controlled stops to avoid skidding the tires.

### RANGE SAFETY RULES

Here are range rules that apply to the riding exercises. They are designed to provide a low risk and positive learning environment. You must abide by these rules:

1. Do not practice without RiderCoach permission.
2. Always wear proper protective gear when seated on the 3WMC.
3. Know the location of the engine cut-off switch and how to use it.
4. Keep the clutch lever "covered" during early skill development.
5. Keep a wrist-flat position on the throttle.
6. Always keep a margin of safety (following distance and stopping behind others), and check all around before moving out.
7. Do not pass other riders unless directed to do so.
8. If you have a problem, move out of the path of travel. A RiderCoach will assist you.
9. Stop smoothly in position if you see or hear a group stop signal, which usually is a whistle.
10. If you do not understand an exercise or become too uncomfortable to ride safely, notify a RiderCoach. RiderCoaches make the final decision whether the rider may proceed.

### RIDERCOACH SIGNALS


RiderCoaches use hand signals during the riding exercises. These non-verbal signals are used to maximize safety and learning. There will also be times when a RiderCoach will provide verbal communication.



On the street, situations change constantly, and sometimes abruptly. As a responsible 3WMC rider, you know how important it is to be in full control of the 3WMC and to be aware of time and space requirements. Proper preparation is a key to enjoyable, safe and responsible 3WMC riding. Thus far we have determined the significance of personal riding gear and the need for care and inspection of your 3WMC. Let's now turn attention to an overall riding strategy to manage risk in traffic.


**Lane Choice:** For multi-lane roads, position yourself to be able to see well down the road and to be visible to others. Maintain as much space cushion as traffic and roadway conditions allow for your margin of safety.

## POSITIONING

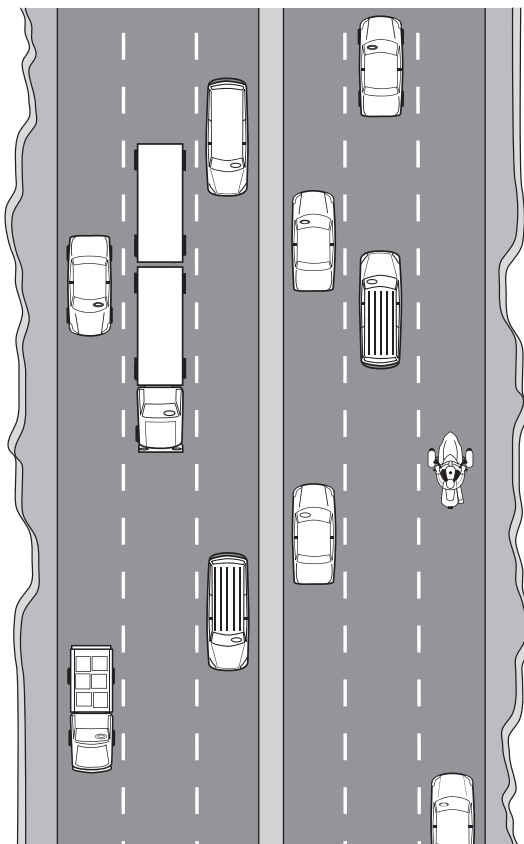

Space Cushion

**Lane Positioning:** Just like riders on two wheels use various portions of a lane as a strategy to see and be seen, you can also position yourself for greater safety. While

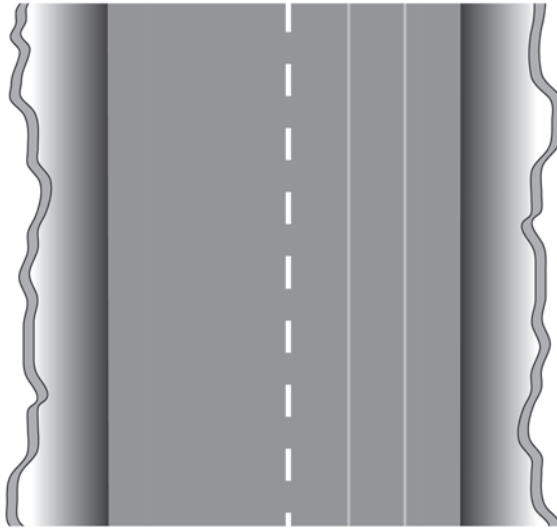


Using Your Lane

the middle portion of the lane provides good spacing on both sides, using the right side can help reduce windblast from oncoming vehicles, and using the left side can help you see farther down a road. Also, adjusting your lane position may help others ahead at intersections see you better. Don't hide among other vehicles. When riding on multiple lane roads with other traffic, use a lane position that avoids blind spots and helps others see you in their mirrors.

## BEING VISIBLE

Many three-wheel motorcycle crashes are a result of motorists not seeing them until it is too late. 3WMCs are generally smaller and not as prevalent as cars and trucks, so they are more difficult to pick out in traffic and their speed may be difficult for others to judge. You must assume the responsibility to be visible in traffic. You must communicate your presence and intentions to other highway users. Here are some suggestions for becoming more visible to others:

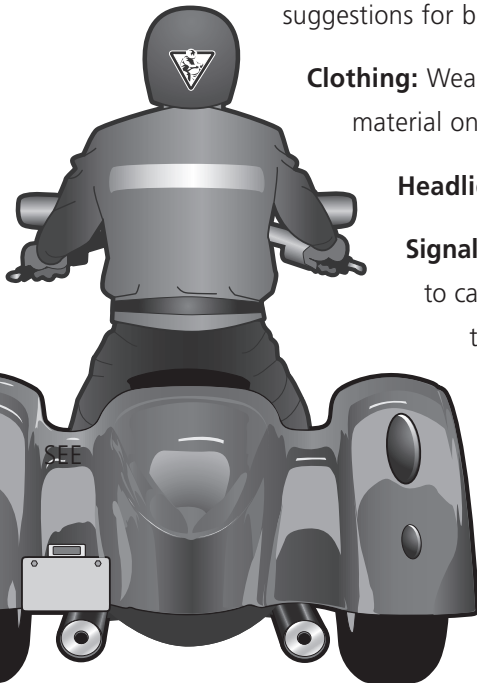

Reflective Attire

**Clothing:** Wear bright colored clothing and a light colored helmet. Use reflective material on your clothing, helmet, and motorcycle.

**Headlight:** Ride with the headlight on during the daytime.


**Signals:** Communicate with other drivers by signaling intentions. Remember to cancel your turn signals. A false signal can create a conflict because it fails to accurately communicate intentions.

**Brake Light:** A flashing brake light is more visible than a steady one. Flash the brake light before and during stops (except of course for emergency stops).

**Horn:** Use the horn to gain attention, but don't rely on it. Many car and truck drivers may not be able to hear it.

“RiderRadar” helps you perceive the hazards ahead, which account for around three-fourths of all the hazards that affect you. Here are three “lead times” that you can use. They are the 2-second following distance, the 4-second immediate path, and the 12-second anticipated path.

**RIDERRADAR<sup>SM</sup>**

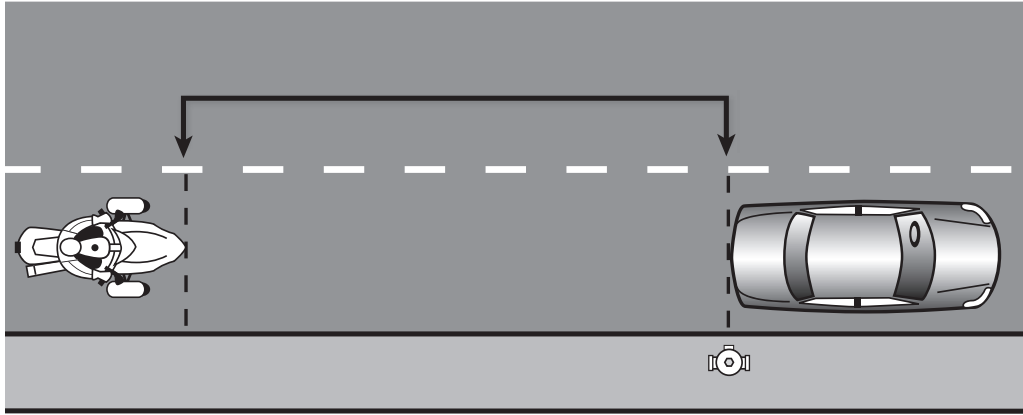

**2-Second Following Distance**

The first lead-time is the 2-second following distance. It is considered to be a minimum distance when conditions are ideal. Less than perfect riding conditions (e.g. reduced traction or visibility, 3WMC rider fatigue, etc.) require increasing available time and space. Here's how to establish 2-second following distance:


- Pick out a fixed point ahead, like a post or pavement marking.
- As the vehicle ahead passes the fixed object, count off “one-three-wheeler-one, two-three-wheeler-two”; if the fixed point has not been reached, following distance is at least 2 seconds.

### 3 Components of Total Stopping Distance

- Perception distance: distance traveled from the time something is present until you perceive it.
- Reaction distance: distance traveled from the time you see a hazard to when you actually apply the brakes.
- Braking distance: distance traveled from the time the brakes have been applied until stopped.

The more time and attention you devote to perception distance, the greater your margin of safety will be.

Consider using a 3- or 4-second following distance for a greater margin of safety, or when less than ideal riding conditions exist.

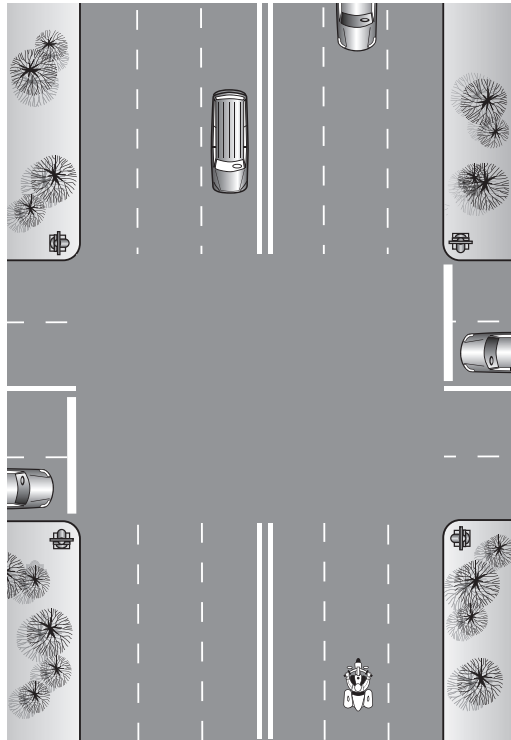

**12-Second Anticipated Path**

The second lead-time is the 4-second immediate path. Anything that is within 4 seconds of your path is considered immediate because a quick response is required if something should go wrong. Having four seconds provides time and space to swerve and/or brake.

The third lead-time is the 12-second anticipated path. Proper searching technique requires that you scan 12 seconds ahead. This means to look ahead to an area it would take that long to reach. It provides time to prepare for a situation before it becomes immediate.

## MENTAL PROCESSING


Safe 3WMC riding is more of a skill of the eyes and mind than of the hands and feet. You probably use some kind of mental strategy to deal with traffic. Some of these processes have been formalized, and all of them form a decision-making approach to increase safety. One good strategy to use is **SEE**. SEE is an acronym that represents **S**earch, **E**valuate, and **E**xecute. It is a process that can help you reduce risk in traffic.

**Search:** Search means to scan aggressively for potential factors and hazards. Searching provides you with information to make decisions. Searching means more than just what is in front of you. It also includes the areas behind and to the sides. Check the mirrors often and use head checks to notice what might be in a blind spot (that area to the side and behind that mirrors do not show). Remember that many 3WMCs have convex mirrors that allow you to see farther to the sides, but they also distort depth perception (how far away the object is). Objects in the mirror may be closer than they appear.


The eyes should not fixate on any one object for more than a split second. It is important to prioritize important elements in the traffic environment. Search in three categories: 1) road and surface characteristics, 2) traffic control markings and devices, and 3) other highway users. They all blend together into what is important at any given moment.

**Evaluate:** To evaluate means to anticipate problems. It means to constantly try to figure out how factors can accumulate and interact to form a hazard or conflict, which if not dealt with, could lead to a crash. It means to predict the worst to get the best results. It means to separate hazards before they develop into a potentially dangerous situation. Consider playing a “What if...” game; it can be fun and energizing. Traffic is such a puzzle at times because other highway users are often unpredictable.

It is important in good risk management to figure out time and space requirements so a safety margin can be maintained. Three factors affect your safety margin: 1) your capabilities and limitations, 2) the capabilities and limitations of your 3WMC, and 3) roadway/traffic conditions. For example, the safety margin is gone if a required maneuver calls for skill beyond your skill level; the safety margin is gone if a situation requires more steering and/or braking than the 3WMC is capable of providing; the safety margin is gone if there is no time and space available to maneuver.

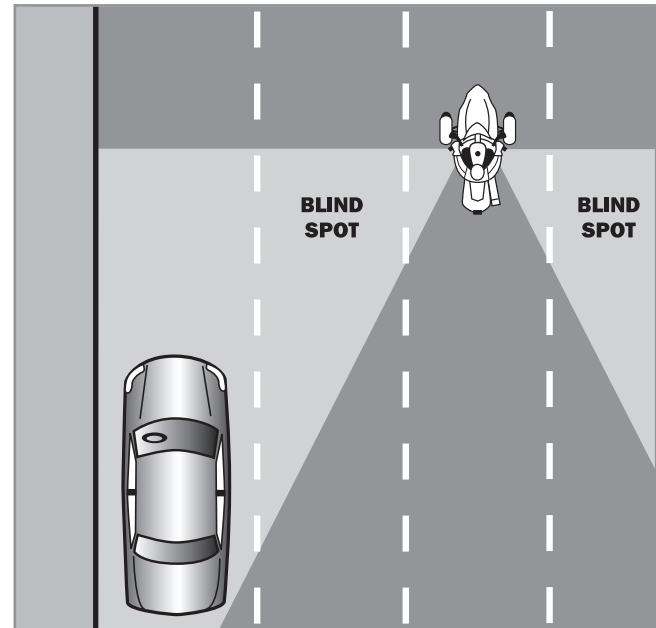

Motorcycle  
Blind Spots

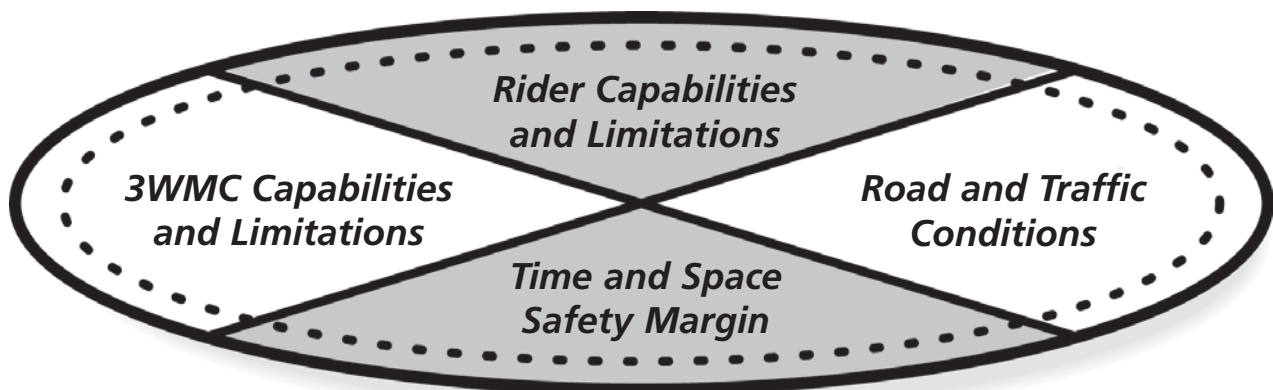

Oval of Safety

Risk is reduced by increasing your  
time and space safety margin

## COMMON RIDING SITUATIONS

**Execute:** Safe 3WMC riding requires a superior mental strategy to avoid the need for superior maneuvering skills. Good 3WMC riders consciously reduce crash-producing factors and they possess well-developed maneuvering skills. Three action steps make up the execute phase. They are: 1) adjust speed, 2) adjust position, and 3) communicate intentions.

It was noted earlier that the primary cause of crashes is an interaction of factors, and you can put yourself at an advantage by applying the strategy of SEE. Here are some common riding situations that you may encounter. It is always necessary to SEE to maintain an adequate safety margin.


## INTERSECTIONS

The greatest potential for a conflict between you and other traffic is at intersections. It's important to know what might happen long before reaching an intersection. Driveways, railroad crossings and alleys should also be considered intersections. Traffic around driveways, parking lots, and side streets can also quickly develop into a hazard. Be attentive for left-turning vehicles. It is helpful to follow these four steps when around an intersection:

- Check for traffic behind
- Check for oncoming traffic
- Check traffic to the left
- Check traffic to the right

Be especially alert at intersections with limited visibility. Be aware of congested surroundings that could make it difficult for others to see you.

When stopped or waiting to turn or for a light to change, check behind you occasionally for vehicles approaching. Flash the brake light as someone approaches from the rear. Have an escape plan and remain in 1st gear. When pulling out into an intersection, wait a second or two in case someone crosses after their traffic light changes to red.

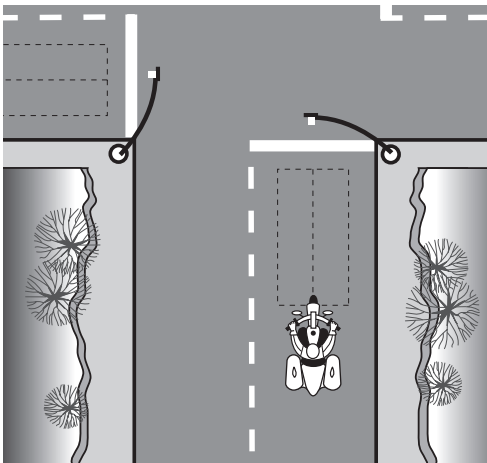

Traffic-Actuated Sensor Lines

Traffic-actuated signal lights can be troublesome for 3WMC riders. Sensors in the road surface detect the presence of a vehicle and cause the traffic light to change. Sometimes the sensor may not detect your presence. To ensure the best chance of being detected, stop where the sensors are located. They are usually visible in the road surface.


When turning from a stop, skillful clutch and throttle control will help you maintain proper lane position. Turn the handlebars and be sure to keep your head and eyes up, looking where you want to go.




## TRAFFIC BETWEEN INTERSECTIONS

Areas between intersections have their own unique hazards.

It is important when riding to find and maintain a space cushion. That means to avoid riding in a blind spot and to maintain similar speeds as other traffic. It is important to watch for vehicles pulling away from a parked position, and to notice pedestrians stepping into your path. Avoid traps and have an escape plan ready.

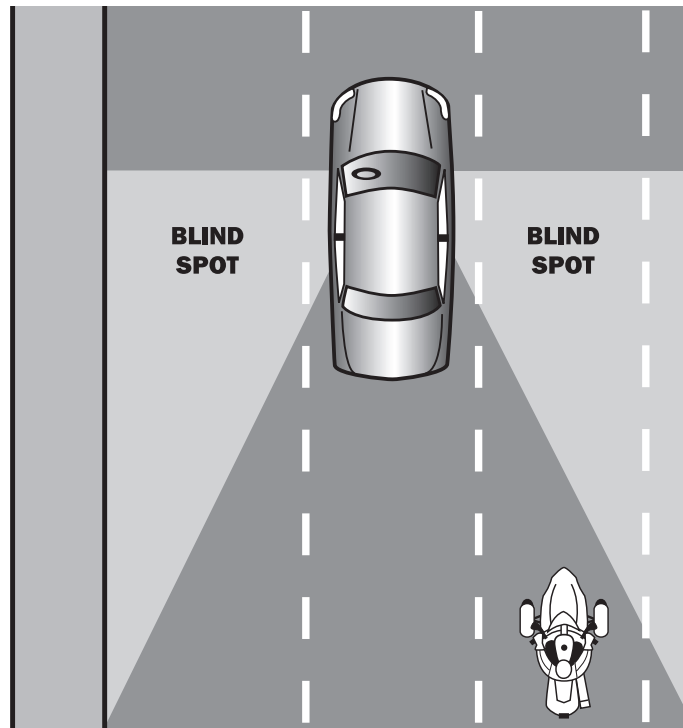

Automobile  
Blind Spots

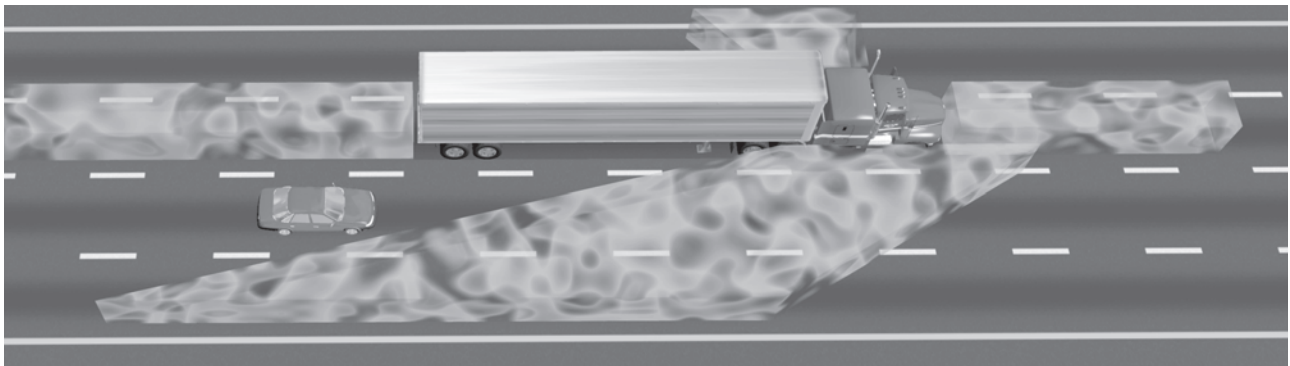

**No-Zone:** areas around a truck to avoid because the driver cannot see you.  
*(graphic compliments of the U.S. Department of Transportation)*


Drivers that tailgate pose a hazard. They may not be able to stop as quickly as you. It is important not to let a tailgating driver distract you from SEEing ahead. In general, it is best to increase your following distance from vehicles ahead to give yourself time and space to execute a smooth, gradual stop. This avoids putting tailgating drivers in a position that requires them to make a quick stop.

Some other options to respond to a tailgating driver are:

- Flash your brake light (communicate your intentions)
- Gradually reduce speed to create more space in front (adjust speed)
- Maintain a lane position that discourages sharing the lane (adjust position to protect your lane), or change lanes
- Turn at the next opportunity, into a street or parking lot, to allow the person tailgating you to pass by

### CURVES

Roads that have a lot of curves can be great fun to ride, but the strategy of SEEing always applies. Crash studies show that running off the road, usually in a curve, accounts for about 37 percent\* of total motorcycle fatalities. This is the primary situation in which motorcyclists have single-vehicle crashes. Watch for areas of reduced visibility and adjust speed accordingly to have an additional safety margin.

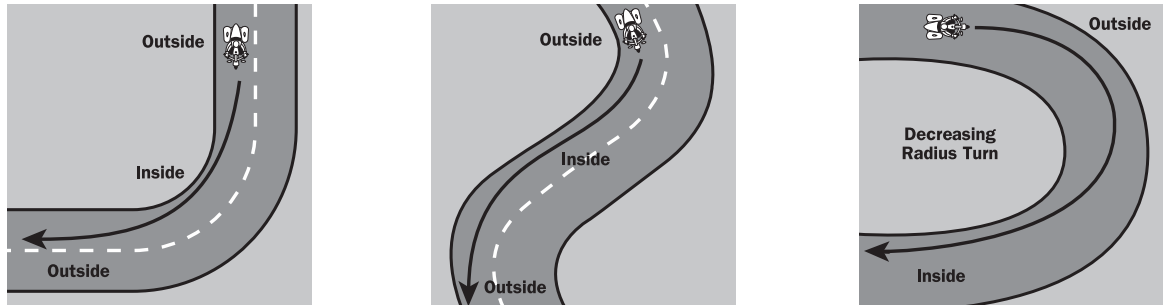

Path of Travel

The basic turning procedure — Slow, Look, and Steer — was discussed earlier. The SEE strategy must be applied for all curves and the rider should choose a conservative entry speed; that is, one that gives them options in the turn.

When approaching a curve you must Search for information about the curve: What is its radius and slope? What is the surface composition and condition? What other traffic is involved? Is the entire curve visible? What happens beyond the curve?

With this information, you must Evaluate the situation. The basic task is to plan an appropriate path and entry speed, being sure to stay in a good lane position, ready for any problems.

And you Execute with smooth and well timed actions.

\*NHTSA 2005 FARS data

## LIMITED-SPACE MANEUVERS

While not as dangerous as intersections, limited-space maneuvers, like parking areas, can be quite a challenge. Practice turning at low speeds, and don't forget to turn your handlebars to a full-lock position, and turn your head to look to the area you want to go. Practice limited-space maneuvers frequently to learn your 3WMC's turning capability.

## PARKING

When parking your 3WMC, consider backing into a parking space, especially when an incline would make backing the 3WMC difficult when you are ready to ride again. Park in a secure and well-lighted area. You may consider using a high-quality lock and chain, or adding an anti-theft or security system. If you use a chain lock, secure it through the frame instead of the wheels. Always park the 3WMC in first gear and use the parking brake, if equipped.

## OBSTACLES

Searching and evaluating effectively can help you avoid obstacles such as potholes, speed bumps, or road debris such as gravel or solid objects. If an obstacle cannot be avoided, here are some tips to consider to safely ride over the obstacle:


If all three tires will be crossing the obstacle:

- Slow as much as traffic and time permit. Approach at a 90-degree angle if possible.
- Avoid fixating on the obstacle, and keep eyes up and looking ahead once the path over the obstacle is determined; continue to SEE.
- Rise slightly off the seat before reaching the obstacle, keeping your knees bent and against the tank. Squeeze both handgrips firmly; do not cover either the brake lever or the clutch lever, but be ready to use them if needed.
- Shift weight to the rear (don't pull back or jerk on the handlebars)
- Slightly roll on the throttle just before the front wheel(s) makes contact (this lightens the weight on the front wheel(s), making it easier to cross over the obstacle).
- Upon contact with the object, roll off the throttle immediately so that the rear wheel(s) are not under power when they roll over the object.
- Do not sit down until the 3WMC is stabilized (you don't want to be sitting down when the seat is coming up).
- Continue to SEE.

## OBSTACLES CONTINUED

When only one of the dual tires (either dual front or dual rear) crosses the obstacle:

- Slow as much as traffic and time permit.
- Approach at a 90-degree angle if possible.
- Avoid fixating on the obstacle, and keep eyes up and looking ahead once the path over the obstacle is determined; continue to SEE.
- Hold both handgrips firmly while relaxing your arms; do not cover either the brake lever or the clutch lever, but be ready to use them if needed.
- Be prepared for the 3WMC to tilt, but do not stand up.
- As you cross the obstacle with the one dual tire, the handlebars may momentarily move back and forth (this is especially obvious on dual rear tire 3WMCs).
- Maintain a steady throttle.
- Continue to SEE.

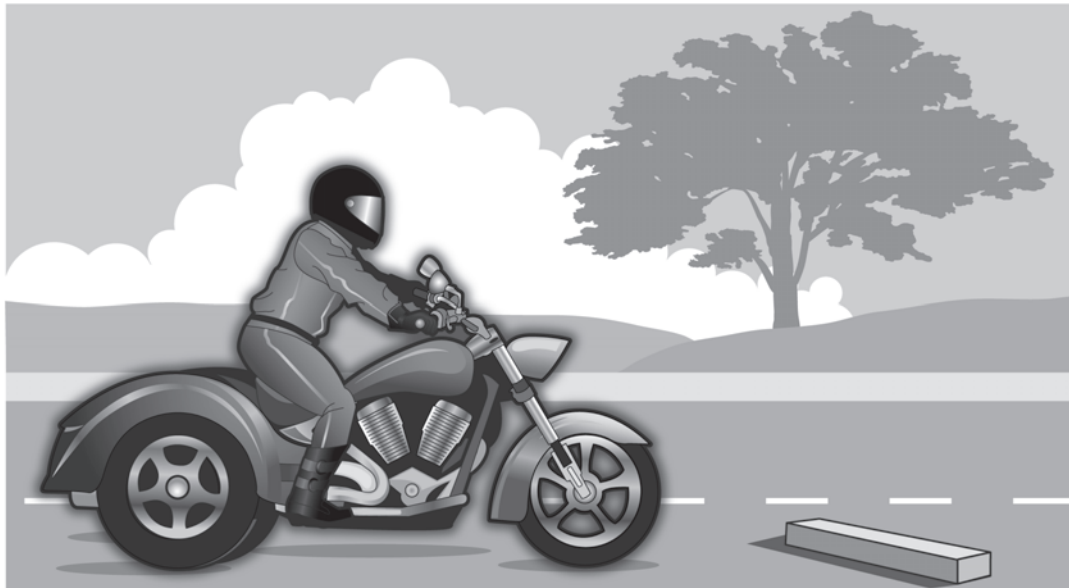

**Crossing an Obstacle  
with All Three Tires**

## LANE CHANGES

The technique to change lanes is similar to when you drive a car. Be sure to check for traffic in the mirrors and to the side in the direction you are moving (with a head check to see what may be in the blind spot area). Don't forget the effect of convex mirrors, as objects are closer than they appear in the mirror. Signal well in advance, using a hand signal as needed to alert others. Be sure to cancel the signal once in a new lane.

## PASSING

SEEing is critical when passing. You should not try to pass more than one vehicle at a time, as one of them may turn left in front of you. To complete a pass:

- Keep an appropriate following distance, and move to the left part of your lane.
- When a safe gap appears, signal a lane change.
- Check the mirrors and the blind spot (an impatient driver may be attempting to pass you and the vehicle ahead).
- Accelerate and change lanes, selecting a lane position that allows maneuvering time and space (be cautious of wind blast and turbulence when passing large vehicles).
- Once well past the vehicle, signal a lane change.
- Check the spacing with a mirror check and head check.
- Return to a good lane position, and cancel the signal.
- Continue to SEE.

## GROUP RIDING

Be sure you have excellent basic skills before venturing out on the highway with a group. Riding alone, you only have to account for yourself. Riding with others, you must take into account the needs and abilities of other riders. Here are some tips for successful group riding:

- Arrive prepared and check specific information from the group leader.
- Check riders ahead and/or behind to maintain a space cushion and safety margin.
- Know ahead of time the planned rest stops and destinations.
- Know the plan should riders in a group get separated by traffic or traffic controls.
- Passing procedures follow the rules for passing as an individual rider.
- Learn common group riding signals.
- 3WMC riders should not use the "staggered" riding formation recommended for 2-wheel motorcycles.


## HILLS

Just as it is important to match gears to road speed on level terrain, a 3WMC rider must determine the best gear for riding in hilly country. A lower gear should be used for steep grades, both in ascending to maintain power and maneuvering speed, and in descending to use engine braking to help control speed. Total stopping distance

increases on a downgrade, so allow for extra braking distance.

Special skill is required to start out on a hill. A good technique is to apply a brake to prevent the 3WMC from rolling backward while you move the clutch lever to the friction zone.

Keeping the clutch in the friction zone can hold the 3WMC in position until you are underway. It may be helpful to use more throttle than when starting on a level surface and you may have to hold the clutch lever in the friction zone longer to get moving.

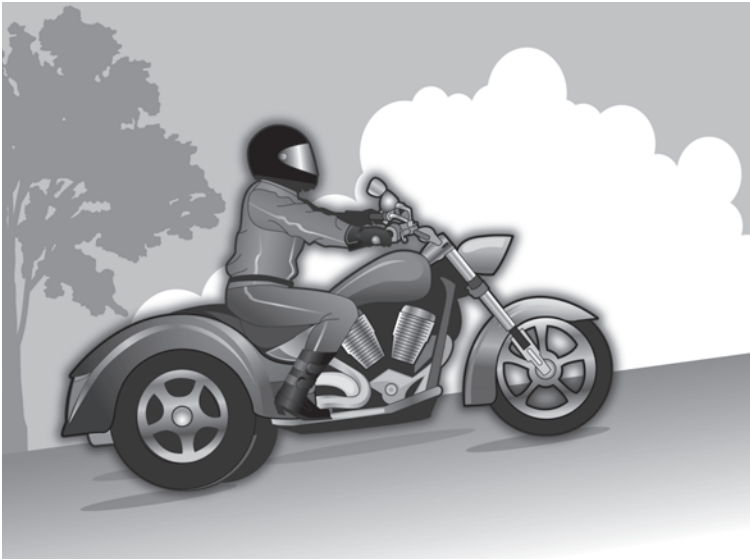

Starting on a Hill

## NIGHT RIDING

Riding at night reduces visibility for you and for other drivers. To be more visible, wear bright, reflective materials. Use the 3WMC's lights wisely, particularly the high beam (do not take the chance of blinding drivers from either direction). Use signals when changing direction, and flash the brake light when slowing or when waiting at intersections.

Maintain good vision by using eye protection that is free of scratches and smudges. Use only clear lenses at night. One of the difficulties associated with night riding is overriding the headlight. This is when total stopping distance exceeds sight distance. Keep speed reasonable for conditions. Use the lights of other vehicles in front of you to help with searching ahead.



Over-Riding the Headlight



## BRAKING SYSTEMS

Most braking systems have a lever for application of the front brake and a pedal for application of the rear brake. But there are other variations, such as braking systems where all the brakes are applied by just pressing a foot pedal. Check the owner's manual for information about your 3WMC's braking system. Here are some other variations you may see:

**Integrated Brakes:** Application of the rear brake(s) will cause some application of the front brake(s).

**Linked Brakes:** Application of either the front brake lever or rear brake pedal will cause some pressure to be applied to the other brake(s).

**Anti-Lock Brakes:** These are designed to prevent or minimize skidding in a maximum-braking stop.

**Single Brake Control:** A single control applies all brakes, like a car.

## MAXIMUM BRAKING AND SWERVING

### STRAIGHT-LINE BRAKING

Stopping a 3WMC in the shortest possible distance is one of the most important skills you can have. Practice in a safe area as often as possible to keep the technique fresh.

The best way to achieve maximum braking is to apply the brakes fully without locking any wheel. Keep the body centered and look well ahead, not down; it helps you keep the 3WMC in a straight line.

### BRAKING IN CURVES

It's important to remember when stopping in a curve that the amount of traction available for braking is reduced. This is because a portion of the total available traction is being used for turning, leaving less traction for braking. If road and traffic conditions permit, straighten or "square" the handlebars (center the steering) before the brakes are applied for a maximum-braking, straight-line stop.

There may be conditions that do not allow straightening first, such as running off the road in a left-hand curve or dealing with oncoming traffic in a right-hand curve. In such situations, apply the brakes smoothly and gradually. As speed is reduced, more brake pressure can be applied.

### TIRE SKIDS

It is important to smoothly and progressively apply the brakes. If the front brake is used abruptly there is a chance the front wheel(s) will lock and a front-tire skid will occur. This will result in immediate loss of steering control. If such a front-tire skid occurs, immediately release the front brake lever to allow the wheel(s) to resume rolling, and then reapply the brake properly. Rear-tire skids can occur in quick stops or

rapid speed reductions because the weight of the 3WMC and rider is transferred away from the rear wheel(s) and to the front. This reduces the traction available to the rear tire(s). When a rear tire(s) skids, directional control is lost.

The greatest danger in any rear-tire skid is releasing the rear brake when the rear wheel(s) is (are) out of alignment with the front wheel. If the rear wheel stops skidding and resumes rolling when it is out of line with the direction of travel, the 3WMC will immediately straighten and could result in loss of control, possibly throwing you off. You can prevent this situation by intentionally keeping the rear brake locked and skidding to a stop.

If the rear wheel(s) is nearly aligned with the front wheel, it is possible to regain control by releasing the rear brake pedal and allowing the wheel to resume rolling. It is important to emphasize that releasing the rear brake should only be considered if all wheels are nearly aligned with the direction of travel. Even moderate misalignment can cause a loss of control.

Another tactic that may work, particularly with 3WMCs with two front wheels, is to steer into the skid as one would when a skid occurs with a four-wheel vehicle.

### SWERVING

Good search and evaluate techniques can prevent situations where swerving becomes necessary. Swerving to avoid a crash may be appropriate if stopping isn't a solution. Be sure you have enough time and space to swerve. Swerving is basically two consecutive turns, one to avoid an obstacle followed immediately by another to regain the original direction.

When swerving, keep your knees against the tank and your feet solidly on the footrests. Look toward the clear path you are trying to reach to avoid fixation on what you are trying to miss.

Maintain a steady throttle and do not brake while swerving. Swerving may require maximum-performance turns for which all available traction is needed to turn the 3WMC quickly. Any braking while swerving, even engine braking, may force the tires beyond their traction limit and cause a skid. If you have time and space to slow before swerving, brake first to slow, then completely release the brakes and swerve. If braking is required to avoid a second hazard in the recovery path, delay braking until the recovery turn is complete and the 3WMC is going straight.

## SURFACE FEATURES

We live in an imperfect world. Sometimes factors develop and interact in subtle ways. With knowledge and use of a good riding strategy, the risks can be managed.

**Rain-slick surface:** The surface is most slippery during the first few minutes of rain because oil and dirt combine with water. It may be wise to avoid riding during the first part of a rainstorm because road surfaces are slickest then. Reduce speed to create a margin of safety and to minimize abrupt braking and/or abrupt acceleration. Metal covers, bridge gratings, train tracks, painted/taped lines, leaves, and wood can be very treacherous when wet.

**Worn pavement:** Heavy traffic use can create a depression in the lane where automobile and truck tires touch the pavement; rain can accumulate in these areas increasing the likelihood of hydroplaning. Avoid these areas when possible.

**Loose surfaces and debris:** This includes such things as sand, gravel, rocks, and trash, as well as liquids such as fuel, oil, or coolant. Watch for items that might cause tire damage such as nails or sharp metal objects. Give yourself plenty of time to SEE.

**Crack sealant and tar strips:** These can be slippery, especially in hot weather. Be sure to recognize them early and adjust lane position to avoid problems.

**Ice/snow patches, mud, moss, and algae:** These areas can be very slippery. Identify them early and reduce speed. When crossing slick patches, you may want to keep the clutch lever squeezed and avoid excessive turning, braking or accelerating.

**Crowned roads:** These are roads that are higher in the middle to provide drainage. Riding on a crowned road may require additional steering adjustments.

**Rain grooves and bridge gratings:** These may cause the 3WMC to feel “loose” and to wander, but they pose no serious threat to control. Keep steering relaxed and avoid abrupt maneuvers.

**Bumps, cracks and tracks:** These are like obstacles, so cross them at a 90-degree angle, if possible. Keep speed under control while maintaining momentum keeping your weight balanced (if all three tires will cross the road condition). For railroad crossings, it is usually safe to ride straight within your lane to cross the tracks. For tracks and road seams that run parallel to your path, move far enough away from the tracks to cross at an angle of at least 45 degrees.

## PASSENGERS AND CARGO

**Passengers:** Carrying a passenger can affect the way a 3WMC handles. The weight makes starting out more difficult and reduces acceleration capability. More time and space will be required for passing. It may also increase stopping distance. Stability may be affected in turns and curves.

## SPECIAL SITUATIONS

Here are some additional tips:

- Adjust the suspension and tire pressures as per operator's manual recommendations. Be sure a passenger is properly attired.
- Keep the brakes applied while the passenger mounts. Have the engine started and the transmission in neutral.
- Avoid abrupt acceleration and deceleration, and go easy in corners, especially with inexperienced passengers.
- Practice quick stops with a passenger.
- Have the passenger follow these rules:
  - a. Hold the passenger hand-holds, and consult your vehicle's owner's manual for other options.
  - b. Keep feet on the passenger footrests at all times, including stop points.
  - c. Keep hands and feet away from hot or moving parts.
  - d. Look over the 3WMC rider's shoulder in the direction of turns and curves.
  - e. Avoid leaning or turning around; make no sudden moves that might affect steering.
  - f. When crossing an obstacle, rise slightly off the seat (if the operator also rises).

**Cargo:** There are three points to consider when carrying loads: weight, location, and security.

**Weight:** Every three-wheeler has a maximum load specified by its manufacturer. It is the difference between empty weight and the maximum allowable weight of the 3WMC and its load, including the operator and passenger. Other things add weight too, such as saddlebags, tank bags, luggage racks, luggage compartments, etc.; don't overload these either. Check the owner's manual for weight limitations and recommendations for tire pressure and suspension adjustments.

**Location:** Due to a 3WMC's size and weight, and the fact that it has fewer than four wheels, where a load is carried is important. Use existing storage spaces wisely and don't overload them. Keep the weight low and as close to the center of the 3WMC as possible, and keep it evenly distributed side to side. Place the heaviest items closest to the center of the vehicle. If using a tank bag, be sure it doesn't interfere with your comfort or ability to steer. Although luggage racks and top trunks appear to be ideal places to pack things, carrying weight high and to the rear of the 3WMC will lighten the front wheel and may cause a degree of handling instability. Never strap items to the handlebars, front forks, steering assembly, or front fender(s). Even if the handlebars and suspension travel are unaffected, the extra weight can cause steering instability.

**Security:** Be sure the load is secure. Use accessory racks and luggage designed for the 3WMC. Secure loose items with web straps. Don't block lights or moving suspension parts. And be sure there are no loose items to blow about or get caught in the wheels. Keep items away from mufflers.


## WINDY CONDITIONS

Strong, steady winds or gusty winds can affect you and your 3WMC. The effects can occur anywhere and often happen in open areas or mountainous terrain. Steady winds may require you to make slight steering adjustments on the handlebars. Be prepared to respond as wind increases and decreases. Wind turbulence can occur when you share the road with large vehicles like trucks, buses and recreational vehicles. Turbulence can occur as you pass traffic that is moving with you as well as when there is opposing traffic. Being passed can also cause you to be affected by wind turbulence. Constantly evaluate circumstances and be prepared to adjust lane position and steering pressure on the handlebar as the need arises.

## ANIMALS

Dogs sometimes chase 3WMCs. The danger is not so much from getting bitten, but from the animal getting under the wheels and causing loss of control. Once an approaching dog is spotted, a good 3WMC rider response is to slow, including a downshift, then accelerate past the point of interception. Don't kick at the dog because it will make controlling the 3WMC difficult.

Larger animals such as deer or elk present a different problem. These animals are unpredictable, and hitting one can be as harmful as colliding with another vehicle. Use more aggressive SEE tactics for additional time and space in areas where larger animals may be present. If one of these animals is encountered on or near the roadway, the only reliable action is to stop before reaching it. Then wait until the animal leaves or move past the animal at walking speed.

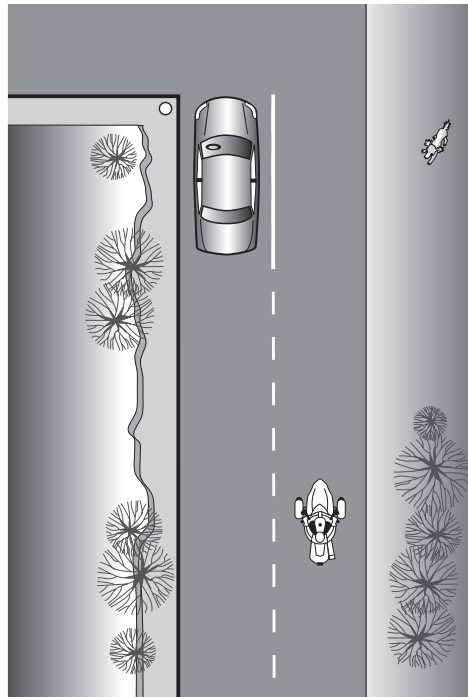

Dog's Interception Angle

### TIRE FAILURE

With modern tubeless tires, actual blowouts are rare, but they can occur. The most common cause of tire failure is riding with the tire pressure too low. Check tires frequently and keep them inflated to the manufacturer's specifications.

If a puncture should occur, maintain a firm hold on the handgrips, but do not fight the steering to correct any wobble or weave that can develop. Avoid downshifting and braking until speed is low and under control. If traffic permits, slow gradually and move to a safe place on the side of the road.

## IMPAIRMENTS **ALCOHOL**

Alcohol is a depressant drug that affects safety. It reduces the ability to search for hazards, to evaluate factors that lead to crashes, and to execute coordinated physical movement.

### ALCOHOL USE AND MISUSE


Riding a three-wheel motorcycle requires a great amount of mental alertness and physical skill, and these chemicals have extraordinarily detrimental effects on a 3WMC rider's capabilities. Alcohol is a major contributor to motorcycle crashes. Almost 50% of all riders killed had been drinking. One-third of these riders had a blood-alcohol concentration (BAC) above the legal limit. The remaining two-thirds had only a couple of drinks in their system, not enough to be legally intoxicated but more than enough to impair their mental and physical skills.

3WMC riders are more likely than car or truck drivers to be hurt in a crash because they are less protected. Some people would never ride a 3WMC after drinking alcohol. Others are willing to risk hurting themselves or others.

Depressant drugs, such as alcohol, slow down bodily functions. Alcohol enters the bloodstream quickly with the effects beginning after the first drink. The primary effects of alcohol are to affect vision and alter good judgment.

## BLOOD ALCOHOL CONCENTRATION (BAC)

The more alcohol there is in the blood, the greater the degree of impairment. The adult male body is able to eliminate alcohol at the rate of almost “one drink” per hour. Women process alcohol at about three-fourths of that rate. If a person drinks at a rate faster than their body can eliminate it, the alcohol begins to accumulate in the bloodstream. At a BAC of approximately 0.05%, most people are impaired.

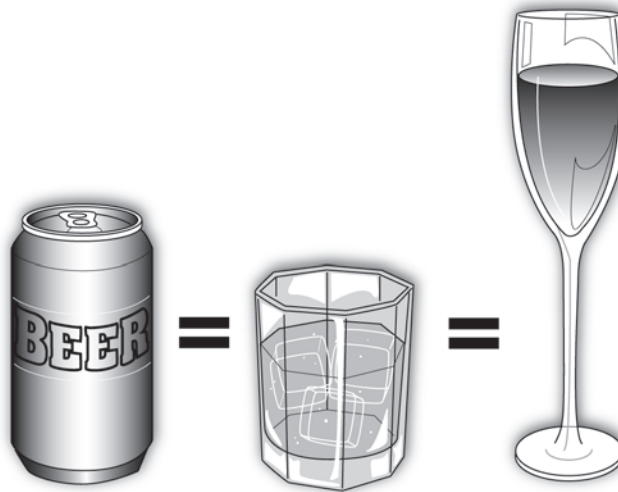

Drink Comparison

BAC is determined by three factors: 1) the amount of alcohol consumed, 2) the time within which it is consumed, and 3) body weight. An accepted definition of a drink is beverage alcohol that contains around one-half ounce of pure ethyl alcohol. A 12-ounce can of beer, a 5-ounce glass of wine, or a shot of liquor (1.5 ounces) each contains about the same amount of alcohol.

The faster a person drinks the more the alcohol accumulates in the bloodstream. For example, if a man consumed two drinks in an hour, at the end of that hour the alcohol from one drink would be eliminated and the alcohol from one drink will remain in the bloodstream. If four drinks are consumed in an hour, at the end of that hour the alcohol from three drinks will remain in the bloodstream.

Physical size is also a factor in determining BAC. To reach a similar BAC level, a smaller person would consume less beverage alcohol than a larger person. This is because the smaller person has less blood volume.

People who try to control their BAC usually don't have much success because judgment is one of the first faculties to be impaired. And because impairment can occur long before a person reaches the legal limit, it is better to separate drinking from riding, period.



## OTHER DRUGS

Alcohol is not the only drug that affects the ability to ride safely. Many over-the-counter and prescription drugs, as well as illegal drugs, have effects and side effects that increase risk. While it is difficult to accurately determine the effects of some drugs on individual 3WMC rider performance and behavior, the negative effects of drugs on the processes necessary to ride safely are known.

**Alcohol/Drug Effects on Search-Evaluate-Execute**

Processes	Definition	Effects	Other Drugs
<b>Search</b>	Riders must aggressively check the environment for hazards	Ability to identify single hazards and multiple factors	Marijuana Tranquilizers Barbiturates Antihistamines
<b>Evaluate</b>	Riders must constantly evaluate the interaction of factors	Ability to use good judgment	Marijuana Amphetamines
<b>Execute</b>	Coordinated operation of controls	Increased reaction time and errors	Tranquilizers Barbiturates Antihistamines

## INTERVENTION

When someone has had too much to drink, it is the responsibility of others to keep that person from taking too many risks. No one likes being in a situation that requires intervention, but the payoff can be enormous. Imagine saving someone's life!

Here are some intervention tips:

- **Enlist others:** The more people supporting the intervention, the better the chance for success.
- **Arrange a ride:** Provide an alternate way home.
- **Slow the pace of drinking:** Direct attention to other activities.
- **Delay departure:** Find reasons to delay the rider from getting on the 3WMC. Provide non-alcohol drinks and food to help time to pass.
- **Keep the 3WMC parked:** If the rider can't be stopped, consider hiding the keys.

**FATIGUE/DROWSINESS**

Riding when tired raises the level of risk because the mind and the senses are not as responsive. Being tired when riding invites disaster. Riding when fatigued requires you to allow extra time and space to identify important clues in traffic and to leave extra room for following and stopping. Drowsiness has become a major factor in crashes. It is more important than ever to ride only when fully alert so you can be responsive to traffic situations.

**EMOTIONS**

It is not easy to determine the personal effects of emotions on riding, but experts recognize that feeling angry, troubled, or stressed makes safe, responsible riding more difficult. Any emotion that distracts your attention away from being fully attentive in applying your SEE strategy will increase risk.

**RIDING TO THE LIMIT**

3WMC riding is a great way to travel. Sometimes the exhilaration and sense of freedom can lead to poor judgment and increased risk. Aggressive riding, such as challenging the road or other riders, should be avoided.

The classroom wrap-up consists of topics to bring the course to successful completion. Topics are determined by the local program and may consist of, but are not limited to, the following:

- Licensing information
- Personal protective gear requirements
- State three-wheel motorcycle equipment requirements
- State insurance requirements
- End-of-course knowledge test
- How to continue to practice and develop skills
- Evaluation of course and RiderCoach(es)
- Formal dismissal and graduation

### **A FINAL NOTE**

We hope this course has been, for you, a great and valuable introduction to the wonderful world of 3WMC riding. The Motorcycle Safety Foundation provides additional training opportunities as part of its Rider Education and Training System (MSF RETS), which is designed to provide you with lifelong learning and safety renewal experiences. We hope you choose to take advantage of those courses and training opportunities as you continue your personal adventure. Additionally, you may wish to check out other MSF publications, including the book "The Motorcycle Safety Foundation's Guide to Motorcycling Excellence," available through [www.msf-usa.org](http://www.msf-usa.org). This publication covers a variety of material of interest to 3WMC riders. Check the MSF website often for information.

**Accident** - a pure chance occurrence; an unexpected and undesirable event; most are preventable; preferred term is “crash” or “collision”

**Alcohol** - specifically ethyl alcohol, a depressant drug consumed as a beverage

**Anti-lock brakes** - type of braking system that automatically releases brake pressure prior to wheel lockup

**BAC** - Blood Alcohol Concentration; percentage by volume of ethyl alcohol in the blood stream

**Blind spot** - area behind or to the side not seen in the mirrors or blocked from view by an object

**Braking distance** - space traveled between brake application and completed stop

**Conspicuous** - be easily seen by others; to be highly visible

**Convex mirrors** - mirrors designed with an outwardly curved surface; shows more area but objects are closer than they appear in the mirror

**Crowned road** - road surface that is higher in the middle to allow for water runoff

**Decreasing-radius turn** - a turn that becomes progressively tighter; use steady throttle to negotiate

**DOT** - stands for U.S. Department of Transportation. Used to note a helmet that has been manufactured to meet DOT performance standards as required by federal law for all helmets sold in the U.S.

**Engine braking** - slowing by shifting down and releasing the clutch to use the engine as a braking force

**Entry speed** - in turning and cornering, the 3WMC's speed at the point where the steering input to turn occurs. The maximum desired entry speed is one that ensures no deceleration in a turn will be required, and one that provides time and space to “straighten and brake” if necessary.

**FINE-C** - acronym for the engine pre-starting checklist (Fuel valve; Ignition switch; Neutral; Engine cut-off switch; Clutch/Choke)

**Friction zone** - area of clutch-lever movement that begins where the clutch starts to transmit power to the rear wheel and ends just prior to full clutch engagement. Used to get under way from a stop, to control speed when riding slowly, and to ensure smooth downshifts when engine braking

**Hydroplaning** - water buildup under the tires resulting in loss of traction

**Hypothermia** - subnormal body temperature due to the cooling effects of cold and wind on exposed skin

**Integrated brake system** - system that also applies partial front braking when the rear brake is applied

**Legal limit** - BAC level that a state names as the level of intoxication

**Linked braking** - system that applies brake pressure to both front and rear when either brake is applied

**Lock-up** - wheel(s) stop turning causing a skid; results from too much brake pressure

**Lugging** - rough or jerking engine operation due to selecting a gear that is too high for road speed

**Maximum braking** - application of both brakes simultaneously to a point just short of skidding; threshold braking

**MOM** - Motorcycle Operator's Manual

**No-Zone** - the area around a truck or other vehicle that is a blind spot

**Overhang** - any part of the 3WMC that extends past the front or rear wheel(s), or laterally beyond the side of the tires.

**Overriding the headlight** - riding at a speed for which total stopping distance exceeds sight distance available from headlight illumination at night

**Perception distance** - space traveled between when a hazard is present to when it is first noticed

**Push-Pull Steering** – the technique of pushing forward with one hand on the 3WMC handlebar, while simultaneously pulling back on the opposite handlebar with the other hand.

**Reaction distance** - space traveled between perceiving a situation and taking action

**Red line** - the line on a tachometer that indicates maximum engine speed

**Reflective** - ability of a surface to reflect light

**Rev** - abbreviation for revolution; usually refers to inappropriately causing the engine run at high speed while the clutch lever is squeezed, or not shifting up soon enough

**Safety margin** - time and space that a rider chooses to create to allow for errors by her/himself or others; considers rider capabilities and limitations, motorcycle capabilities and limitations, and roadway/traffic conditions

**SEE** - an acronym for a dynamic strategy to see and be seen: Search/Evaluate/Execute

**Space cushion** - having a margin of safety

**Square the handlebars** - refers to centering the steering with the 3WMC moving in a straight line

**Tailgating** - following at a distance of less than 2 seconds

**Target fixation** - to look at an object that you are trying to avoid, may result in failing to avoid the object

**Threshold braking** - to apply brake pressure to a point just short of lock-up; maximum braking

**T-CLOC** - an acronym for the motorcycle pre-ride inspection checklist (Tires and Wheels; Controls; Lights and Electrics; Oil and Other Fluids, Chassis)

**Traffic-actuated signal** - a traffic light that senses vehicle presence before changing

**Visibility** - ability to see and/or be seen

**Visual lead times** - basis of a strategy to use the eyes and mind to reduce/manage risk: 2-second following distance; 4-second immediate path; 12-second anticipated path

Name \_\_\_\_\_ Date \_\_\_\_\_

## Unit II

1. **Name 2 primary differences between cars/trucks and motorcycles/3WMCs.**
2. **What are the problems that these differences cause?**
3. Who is responsible for safety?
4. How can someone tell if they would likely be dangerous on a 3WMC?
5. In what way does the Ladder of Risk illustration relate to safe riding?
6. What must happen before risks can be managed?
7. **Part of being responsible means to give a lot of thought to what?**
8. **What is the primary cause of motorcycle crashes?**
9. What leads up to most crashes?
10. In what way does the Crash Chain illustration relate to safe riding?
11. **How does the Handbook define a “good 3WMC rider”?**
12. **How does a 3WMC rider reduce factors that lead to crashes?**
13. **What does it mean to have a margin of safety?**
14. **What is SEE, and what does each letter stand for?**

## Unit III

15. **Name several purposes of protective riding gear.**
16. List the 6 items named as proper, protective gear.
17. What is the function of a helmet?
18. List the 4 basic components of a helmet named on page 10.
19. What is the purpose of each of these 4 components?
20. **What’s the difference between a full-face and three-quarter-coverage helmet?**
21. **Why aren’t ordinary glasses or sunglasses sufficient eye protection?**
22. **What stickers are likely to indicate a well-made helmet?**
23. **What type of injury accounts for the majority of motorcycle deaths?**
24. Name 2 types of motorcyclist/3WMC rider eye protection.
25. **What is the value of appropriate footwear?**
26. Name at least 3 considerations in choosing gloves.



27. **What is the value of motorcycle specific clothing?**
28. What are some considerations for choosing proper clothing?
29. **Define “hypothermia” and provide an example.**
30. **What is the value of dressing in layers?**
31. How can clothing make you more visible to others in traffic?
32. What are some considerations in choosing a rain suit?
33. What is the value of a pre-ride inspection?
34. **What is T-CLOC and what does each letter stand for?**
35. Where can you find information about routine maintenance?
36. What is the value of routine maintenance?
37. **What are the primary 3WMC controls?**
38. How does a 3WMC rider operate the throttle?
39. What does the clutch lever do?
40. What does lifting or pressing on the shift lever accomplish?
41. **What is meant by “shift pattern”?**
42. **Where are the brake controls found?**
43. What is the best source of information about your motorcycle?
44. **What does the fuel valve do?**
45. What are the positions on the fuel valve?
46. What does the choke control do?
47. Where is the engine cut-off switch located?
48. **What is the function of the tachometer?**
49. **What are some common indicator lights?**
50. **What are the steps in starting the engine?**
51. **What is the friction zone?**
52. **Describe good riding posture.**
53. **List the 3 steps in turning.**
54. What is the value of the “look” step?
55. **Why do you change gears?**
56. **What is the 3-part shift process?**
57. **What is engine braking?**
58. **Too much pressure applied too quickly to the brakes could cause what to happen?**
59. **Why should all brakes be used simultaneously?**
60. **What’s the purpose of the range safety rules?**
61. Name 3 of the more important Range Safety Rules.

62. How will the RiderCoaches communicate with you on the range?

### Unit IV

63. What does it mean to have a space cushion?
64. How does a 3WMC rider utilize lane positions?
65. Name some ways to be more visible to others in traffic.
66. What are the 3 “lead times” (RiderRadar)?
67. Why is the 2-second following distance considered minimum?
68. Why is the 4-second lead-time called “immediate”?
69. What advantage is gained by using a 12-second anticipated path?
70. Name the 3 components of total stopping distance.
71. Safe riding is a skill of what kind?
72. What does it mean to Search?
73. What is the characteristic of a convex mirror?
74. What are the 3 general Search categories?
75. What does Evaluate mean?
76. What are the 3 action steps of Execute?
77. What 3 things in the Oval of Safety affect your margin of safety?
78. Where is the greatest potential for conflict?
79. What 4 steps should you follow when around an intersection?
80. What is significant about a traffic-actuated signal?
81. What are some hazards between intersections?
82. What is the No-Zone?
83. How should you respond to a tailgating driver?
84. What are some factors to search for when approaching a curve?
85. How can an outside-inside-outside path of travel help you in curves?
86. Why rise off the seat when crossing an obstacle?
87. How is the throttle used when crossing an obstacle?
88. Why make a head check before changing lanes?
89. Is there a unique procedure when passing another vehicle on your motorcycle?
90. What makes starting out on a hill (upgrade) more difficult?
91. What is “overriding the headlight” and what is the solution?
92. What is the best way to achieve maximum braking?
93. What complicates braking in a curve?
94. What is a key to stopping quickly in a curve?

95. What should you do if the front tire skids because of improper braking (front brake grab)?
96. What is the danger of a rear-tire skid?
97. What action should be avoided when swerving?
98. Why is a surface most slippery as it begins to rain?
99. What is hydroplaning?
100. How can a crowned road affect riding?
101. How does carrying a passenger affect the operation of a 3WMC?
102. What are a few tips for carrying passengers?
103. What 3 points should be considered when carrying loads?
104. How should you respond to a dog that approaches from the side?
105. What is the primary cause of tire failure?
106. What are the 2 primary effects of alcohol?
107. How fast is alcohol eliminated from the bloodstream?
108. How much beverage alcohol equals one drink?
109. What are some other drugs that affect SEE?
110. What is the best way to approach intervention?
111. What are some ways to intervene when someone has had too much to drink?
112. What besides alcohol/other drugs can produce impairment?





# MSF Student Satisfaction Survey Form for 3-Wheel Basic *RiderCourse*<sup>SM</sup>

Please help the Motorcycle Safety Foundation maintain high-quality *RiderCourses* by providing feedback on your training experience. You can complete the following evaluation form online at [www.msf-usa.org](http://www.msf-usa.org) (click on "Participate"), or mail it to the MSF. To mail this form, fold it so that the MSF's address is facing outward, and attach first-class postage. All information will be held in strictest confidence. Your personal contact information will be used only for quality assurance purposes and may be shared with the training site or your state coordinator. This information will not be sold or provided for commercial use.

Rev 5/08

1. Overall satisfaction with course:

1 2 3 4 5 6 7 8 9 10  
Very Low Very High

2. When you compare your overall riding skills and strategies after you completed the course with your riding skills and strategies prior to completion, how much improvement did you make?

1 2 3 4 5 6 7 8 9 10  
Very Little A Whole Lot

\*VSD=Very Strongly Disagree; SD=Strongly Disagree; D=Disagree; N=Neither Disagree nor Agree; A=Agree; SA=Strongly Agree; VSA=Very Strongly Agree

Overall	VSD	SD	D	N	A	SA	VSA	RiderCoach Instruction	VSD	SD	D	N	A	SA	VSA
3. Registering for this course was easy.	1	2	3	4	5	6	7	11. I felt respected by my RiderCoach(es).	1	2	3	4	5	6	7
3a. How many times did you try to register prior? _____															
4. There were many available classes in my geographic area.	1	2	3	4	5	6	7	12. I felt encouraged by my RiderCoach(es).	1	2	3	4	5	6	7
5. I was able to enroll in a course that was convenient to my schedule.	1	2	3	4	5	6	7	13. The RiderCoach(es) appeared to have prepared sufficiently for the class.	1	2	3	4	5	6	7
6. The time between registering for the class and attending the class was reasonable.	1	2	3	4	5	6	7	14. The RiderCoach(es) demonstrated effective communication skills.	1	2	3	4	5	6	7
6a. Your waiting time: _____ days															
7. The cost of the course was about right.	1	2	3	4	5	6	7	15. The RiderCoach(es) showed concern for my personal safety.	1	2	3	4	5	6	7
7a. Your tuition fee: \$ _____															
Classroom	VSD	SD	D	N	A	SA	VSA	Range	VSD	SD	D	N	A	SA	VSA
8. Overall, the pace of the classroom instruction was about right.	1	2	3	4	5	6	7	16. Overall, the pace of the range instruction was about right.	1	2	3	4	5	6	7
9. The quality of the classroom materials (handbook, videos, etc.) was high.	1	2	3	4	5	6	7	17. Overall, the time I had to practice riding was about right.	1	2	3	4	5	6	7
10. During the course, I was given the opportunity to participate in discussions.	1	2	3	4	5	6	7	17a. Total # of students on range _____							
								18. The quality/condition of the range equipment was high.	1	2	3	4	5	6	7

Comments and/or suggestions for improvement on any aspect of the course.

## Demographics

(Providing responses to these questions is strictly voluntary.)

19. Do you currently ride a motorcycle or 3WMC regularly?  
☐ No ☐ Yes — Estimated # of miles you ride annually \_\_\_\_\_
20. What was your skill level prior to the training class?  
☐ Never ridden prior ☐ Beginner ☐ Experienced
21. Did you pass the classroom knowledge test? ☐ No ☐ Yes
22. Did you pass the riding skill test? ☐ No ☐ Yes
23. Age  
☐ Under 21 ☐ 21-24 ☐ 25-34 ☐ Male  
☐ 35-44 ☐ 45-64 ☐ 65 or Over ☐ Female
24. Gender
25. Which of the following *RiderCourses* would you be interested in attending?  
☐ DirtBike School ☐ Street RiderCourse  
☐ ScooterSchool ☐ None of the above  
☐ Experienced RiderCourse

– Tape to close here –

To complete this evaluation form online, please visit **[www.msf-usa.org](http://www.msf-usa.org)** and click on "Participate," where you can also sign up to receive free safety and riding tips from the Motorcycle Safety Foundation.

----- FOLD HERE ----- FOLD HERE -----

**STUDENT SURVEY**

First  
Class  
Postage  
Required

**Motorcycle Safety Foundation  
ATTN: Quality Assurance & Research/3WBRC  
2 Jenner, Suite 150  
Irvine, CA 92618-3806**

----- FOLD HERE ----- FOLD HERE -----

***FOLD THIS SECTION IN FIRST***

Name: \_\_\_\_\_

Street Address: \_\_\_\_\_

City: \_\_\_\_\_ State: \_\_\_\_\_ ZIP Code: \_\_\_\_\_

E-mail Address: \_\_\_\_\_ @ \_\_\_\_\_

May the MSF contact you in the future? ☐ YES ☐ NO

For information on becoming an MSF RiderCoach, visit [www.msf-usa.org](http://www.msf-usa.org) and click on RiderCoach Info.

This information is not part of the 3-Wheel Basic *RiderCourse* and is provided solely for your convenience. You can tear this page out and keep it with you when you ride.

T-CLOC: Pre-Ride Inspection Checklist

T-CLOC ITEM	WHAT TO CHECK	WHAT TO LOOK FOR	WHAT TO CHECK	WHAT TO LOOK FOR	CHECK-OFF
T-TIRES & WHEELS					
Tires	Condition	Tread depth, wear, weathering, evenly seated, bulges, embedded objects.	Front	Rear	
	Air Pressure	Check when cold, adjust to load.	Front	Rear	
Wheels	Spokes	Bent, broken, missing, tension, check at top of wheel: "ring" – OK — "thud" = loose spoke	Front	Rear	
	Cast	Cracks, dents.	Front	Rear	
	Rims	Out of round/true = 5mm. Spin wheel, index against stationary pointer.	Front	Rear	
	Bearings	Grab top and bottom of tire and flex: No freewheel (click) between hub and axle, no growl when spinning.	Front	Rear	
Brakes	Seals	Cracked, cut or torn, excessive grease on outside, reddish-brown around outside.	Front	Rear	
	Function	Each brake alone keeps bike from rolling.	Front	Rear	
	C-CONTROLS				
Levers and Pedal	Condition	Broken, bent, cracked, mounts tight, ball ends on handlebar levers, proper adjustment.			
	Pivots	Lubricated.			
Cables	Condition	Fraying, kinks, lubrication: ends and interior.			
	Routing	No interference or pulling at steering head, suspension, no sharp angles, wire supports in place.			
Hoses	Condition	Cuts, cracks, leaks, bulges, chafing, deterioration.			
	Routing	No interference or pulling at steering head, suspension, no sharp angles, hose supports in place.			
Throttle	Operation	Moves freely, snaps closed, no revving when handlebars are turned.			
L-LIGHTS					
Battery	Condition	Terminals; clean and tight, electrolyte level, held down securely.			
	Vent Tube	Not kinked, routed properly, not plugged.			
Headlamp	Condition	Cracks, reflector, mounting and adjustment system.			
	Aim	Height and right/left.			
Tail lamp/brake lamp	Operation	Hi beam/low beam operation.			
	Condition	Cracks, clean and tight.			
Turn signals	Operation	Activates upon front brake/rear brake application.			
	Operation	Flashes correctly.	Front left Rear left	Front right Rear right	
Mirrors	Condition	Cracks, clean, tight mounts and swivel joints.			
	Aim	Adjust when seated on bike.			
Lenses & Reflectors	Condition	Cracked, broken, securely mounted, excessive condensation.			
	Condition	Fraying, chafing, insulation.			
Wiring	Routing	Pinched, no interference or pulling at steering head or suspension, wire looms and ties in place, connectors tight, clean.			
O-OIL					
Levels	Engine Oil	Check warm on center stand on level ground, dipstick, sight glass.			
	Hypoid Gear Oil, Shaft Drive	Transmission, rear drive, shaft.			
	Hydraulic Fluid	Brakes, clutch, reservoir or sight glass.			
	Coolant	Reservoir and/or coolant recovery tank — check only when cool.			
Leaks	Fuel	Tank or gauge.			
	Engine Oil	Gaskets, housings, seals.			
	Hypoid Gear Oil, Shaft Drive	Gaskets, seals, breathers.			
	Hydraulic Fluid	Hoses, master cylinders, calipers.			
	Coolant	Radiator, hoses, tanks, fittings, pipes.			
	Fuel	Lines, fuel valve, carbs.			

C-CHASSIS				
Frame	Condition	Cracks at gussets, accessory mounts, look for paint lifting.		
	Steering-Head Bearings/ Swingarm Bushings/ Bearings	No dent or tight spots through full travel, raise front wheel, check for play by pulling/pushing forks. Raise rear wheel, check for play by pushing/pulling swingarm.		
Suspension	Front Forks	Smooth travel, equal air pressure/damping, anti-dive settings.	Left	Right
	Rear Shock(s)	Smooth travel, equal pre-load/air pressure/damping settings, linkage moves freely and is lubricated.	Left	Right
Chain or Belt	Tension	Check at tightest point.		
	Lubrication	Side plates when hot. Note: do not lubricate belts.		
Fasteners	Sprockets	Teeth not hooked, securely mounted		
	Threaded	Tight, missing bolts, nuts.		
	Clips	Broken, missing.		
	Cotter Pins	Broken, missing.		

### EMERGENCY INFORMATION

Rider's Name \_\_\_\_\_ Blood Type \_\_\_\_\_

Allergies/Medical Conditions \_\_\_\_\_

Doctor's Name/Phone \_\_\_\_\_

Cycle Insurer Name/Phone \_\_\_\_\_

Contact this person if rider is injured

Name \_\_\_\_\_ Home Phone \_\_\_\_\_

Work Phone \_\_\_\_\_ Cell Phone \_\_\_\_\_





## Additional Resources


Your learning doesn't stop when you've completed the Basic *RiderCourse*. The Motorcycle Safety Foundation offers refresher hands-on rider courses (such as the Experienced *RiderCourses*) as well as several self-contained classroom-style safety programs ("modules") and publications. Our modules can help you learn more, and you can use them to teach others, whether you're a riding club leader, a schoolteacher, or just someone who enjoys riding a motorcycle. Please visit our website ([www.msf-usa.org](http://www.msf-usa.org)) to obtain these items and other information that can enhance your safety and enjoyment.



The **Intersection – Motorist Awareness** kit is MSF's newest approach to enhancing motorist awareness of motorcycles. The program combines personal stories and character development with a dramatic new look at a crash scene that's all too common. The DVD contains three separate 13-minute versions to appeal to teens (via driver education classes), adults (via traffic schools), and commercial drivers (via employee orientation). Includes Leader's Guide, ten Participant's Guides, and 25 Quick Tips brochures.



The **Share the Adventure – Group Riding** kit describes how to put safety first whenever participating in a group ride. Learn about ride preparation and organization, pre-ride meetings, hand signals, and proper riding formations in complex traffic situations. The kit includes one Leader's Guide, 10 student workbooks and a 16-minute DVD video that depicts common group riding scenarios.




The **Riding Straight – Alcohol Awareness** kit is a curriculum you can present to *all* roadway users to address the serious issue of impaired riding/driving. The program features interactive Fatal Vision® Goggles, so participants can experience alcohol impairment (at a 0.08 BAC level) with a sober mind...*and no hangover*. This fun demonstration shows that even legal levels of intoxication can have serious consequences. The module also contains a Facilitator's Guide, a 12-min. VHS video, and a roll of MSF floor tape to use with the goggles for conducting the "sobriety test."



The **SeasonedRider – Aging Awareness** kit is a fun, activity-based learning program designed to help riders assess and compensate for the effects of aging on their ability to effectively manage risk when operating a motorcycle. The kit includes an award-winning 13-minute DVD video, Facilitator's Guide, and props for several learning activities. Though the activities are targeted at riders over the age of 40, the sessions are appropriate for operators of any age and any type of vehicle.



The **StreetSmart – Rider Perception** kit is an engaging program that helps riders improve their perception. The kit contains a Leader's Guide, 10 participant workbooks, four floor mats, a deck of large playing cards and a CD containing perception tests for the classroom powerpoint presentation. A preview of the perception tests is available on our website.



**(Book)** In a clear, engaging style with detailed diagrams and full-color photographs and illustrations, **MSF's Guide to Motorcycling Excellence** complements *RiderCourse* instruction and addresses rider attitude, protective riding gear, pre-ride inspection, and basic and advanced street skills in a deeper manner. Tips on how to create a "space cushion" to avoid traffic hazards; stop quickly; manage traction; and much more, are included. The book also features advice from legendary racers and other experts on various aspects of motorcycling. 192 pages.



2 Jenner, Suite 150 • Irvine, CA 92618-3806  
949.727.3227 • [www.msf-usa.org](http://www.msf-usa.org)

©2010 Motorcycle Safety Foundation  
PN MSCU4362NC00