

**Houston International Specialty Inc.**

<b>Size</b>	7.625
<b>Grade</b>	P110
<b>Weight</b>	39

## TCPC


Coupling and Pipe Dimensions (in)						
	Outer Diameter	Inner Diameter	Coupling Length	Make-up Loss	Wall Thickness	Drift Diameter
<b>Coupling</b>	8.500	6.604				
<b>Pipe</b>		6.625	11.215	5.100	0.500	6.500
<b>Pin</b>		6.604				

Torque Values (ft-lbs)				
During Make-Up			Max. Working Torque	Yield Torque
Minimum	Optimum	Maximum**		
15,000	19,300	23,600	51,200	57,000


Yield Stress (x1000 lbs.)	
Tensile	Compressive
1,231	1,231

Maximum Pressure (psi)	
Internal	External
12,620	11,080

Blanking Dimensions (in)			
	ID (+0.0 -0.032)	OD (+0.032 -0.0)	OAL (+1.5 -0.0)
<b>Box End</b>	6.604	8.500	6.100
<b>Pin End</b>	6.604	7.625	5.600

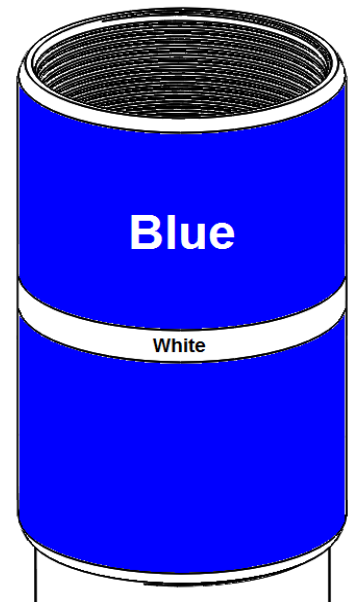

\*\*Max M/U Torque may be exceeded only by approval from the Thread Representative.

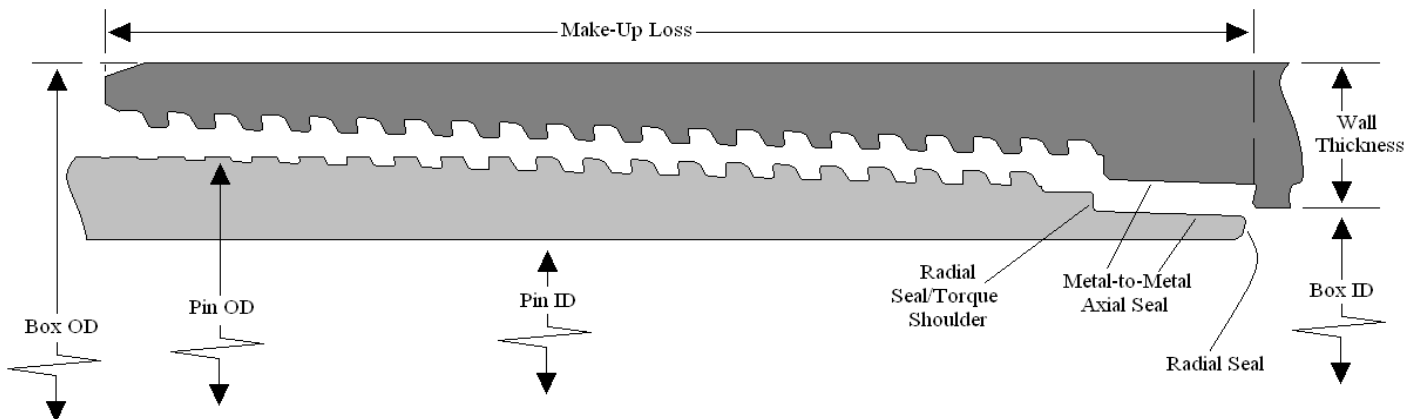

\*Data are for information purposes only. Though HIS has made efforts to ensure accuracy, HIS makes no warranty for loss or damage due to its use.