

Houston International Specialty Inc.

Size	4.5
Grade	N/L 80
Weight	11.6


TCBC-HT

Coupling and Pipe Dimensions (in)						
	Outer Diameter	Inner Diameter	Coupling Length	Make-up Loss	Wall Thickness	Drift Diameter
Coupling	5.000	4.425				
Pipe		4.000	7.875	3.938	0.250	3.875
Pin		4.000				


Torque Values (ft-lbs)				
Field End Make-Up			Max. Working Torque ¹	Yield Torque
Minimum	Optimum ²	Maximum		
3,600	4,900	5,800	6,600	8,000

Yield Stress (x1000 lbs.)	
Tensile	Compressive
267	267

Maximum Pressure (psi)	
Internal	External
7,780	6,350

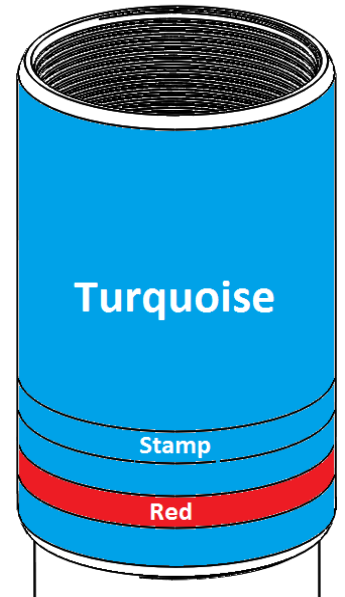

- ¹ Max. Working Torque value is not to be exceeded during operation.
- ² If Optimum Torque does not meet the Base of Triangle Stamp, M/U to the Base of Triangle.

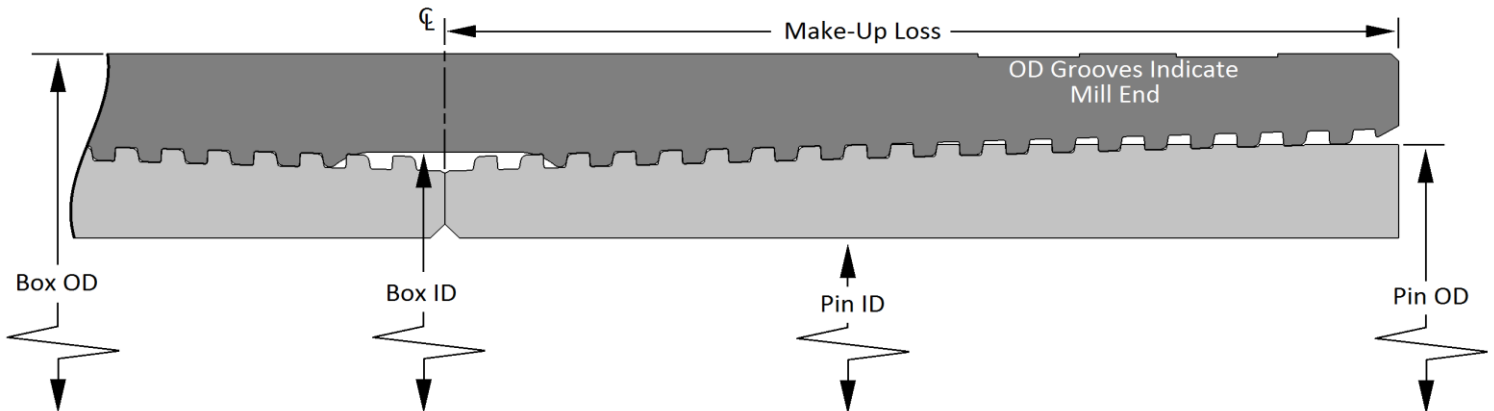

*Data are for information purposes only. Though HIS has made efforts to ensure accuracy, HIS makes no warranty for loss or damage due to its use.

rev B

19996 Hickory Twig Way Spring, TX 77388
 Phone: (281) 602-7550
 Fax: (281) 602-7557