


# DS-7300HGHI-SH


## Turbo HD DVR

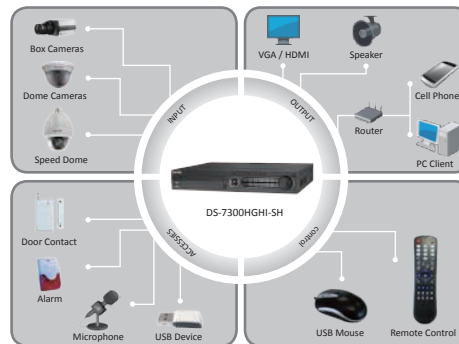

### Key features

- H.264 & Dual-stream video compression
- Support HD-TVI/analog/IP camera triple hybrid
- Support both HD-TVI and analog cameras with adaptive access
- Full channel@720P resolution real-time recording
- HDMI and VGA output at up to 1920×1080P resolution
- Long transmission distance over coax cable
- Support up to 16-ch synchronous playback

### Rear Panel of DS-7300HGHI-SH

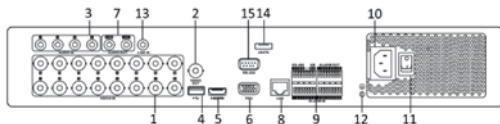

- 1 VIDEO IN
- 2 VIDEO OUT
- 3 AUDIO IN, RCA Connector
- 4 USB Port
- 5 HDMI Interface
- 6 VGA Interface
- 7 CVBS AUDIO OUT and VGA AUDIO OUT
- 8 LAN Network Interface
- 9 RS-485 Serial Interface, Keyboard Interface, ALARM IN and ALARM OUT
- 10 100~240V AC Power Input
- 11 Power Switch
- 12 GND
- 13 LINE IN
- 14 eSATA Interface
- 15 RS-232 Serial Port

### Available models

- DS-7304HGHI-SH
- DS-7308HGHI-SH
- DS-7316HGHI-SH
- DS-7324HGHI-SH
- DS-7332HGHI-SH

	DS-7304HGHI-SH	DS-7308HGHI-SH	DS-7316HGHI-SH	DS-7324HGHI-SH	DS-7332HGHI-SH
<b>Video/Audio input</b>					
Video compression	H.264				
Analog and HD-TVI video input	4-ch	8-ch	16-ch	24-ch	32-ch
	BNC interface (1.0Vp-p, 75 Ω)				
Supported camera types	720P25, 720P30, 720P50, 720P60, 1080P25, 1080P30, CVBS				
IP video input	1-ch (up to 5-ch)	2-ch (up to 10-ch)	2-ch (up to 18-ch)	8-ch (up to 32-ch)	
	Up to 2MP resolution				
Audio compression	G.711u				
Audio input	4-ch, RCA (2.0 Vp-p, 1 KΩ)				
Two-way audio in	1-ch, RCA (2.0 Vp-p, 1 KΩ)				
<b>Video/Audio output</b>					
HDMI / VGA output	1920 × 1080 / 60 Hz, 1280 × 1024 / 60 Hz, 1280 × 720 / 60 Hz, 1024 × 768 / 60 Hz				
Encoding resolution	Main stream: 1080P (non-real-time) / 720P / VGA / 4CIF / CIF Sub-stream: WD1 (non-real-time) / 4CIF(non-real-time) / CIF / QCIF / QVGA				
Frame rate	Main stream: 1/16 fps ~ Real time frame rate Sub-stream: 1/16 fps ~ Real time frame rate				
Video bitrate	32 Kbps-6 Mbps				
Audio output	2-ch, RCA (Linear, 1KΩ, for VGA output and CVBS output respectively)				
Audio bitrate	64 Kbps				
Dual-stream	Support				
Stream type	Video, Video & Audio				
Synchronous playback	4-ch	8-ch	16-ch	24-ch	32-ch
Playback resolution	1080P / 720P / VGA / WD1 / 4CIF / CIF / QVGA / QCIF				
<b>Network management</b>					
Remote connections	128				
Network protocols	TCP/IP, PPPoE, DHCP, DNS, DDNS, NTP, SADP, SMTP, SNMP, NFS, iSCSI, UPnP™, HTTPS				
<b>Hard disk</b>					
Type	4 SATA interfaces for 4 HDDs; 1 eSATA interface				
Capacity	Up to 4 TB capacity for each disk				
<b>External interface</b>					
Network interface	1; 10M / 100M / 1000M self-adaptive Ethernet interface				
Serial interface	RS-232, RS-485, Keyboard				
Alarm in/out	16 / 4				
USB port	3 × USB2.0				
<b>General</b>					
Power supply	100 ~ 240VAC, 47 ~ 63HZ				
Consumption (without hard disks)	≤ 30W	≤ 40W	≤ 55W	≤ 65W	
Working temperature	-10 °C ~ +55 °C (14 °F ~ 131 °F)				
Working humidity	10% ~ 90%				
Chassis	19-inch rack-mounted 1.5U chassis				
Dimensions (W × D × H)	445 × 390 × 70 mm (17.5 × 15.3 × 2.7 inch)				
Weight (without hard disks)	≤ 5Kg (11.0lb)				