




The Double Decker™

LB25-TD / Fixed Neck Lowboy

- ▶ **Capacity:** 70,000 lbs GVWR (50,000 lbs in 16')
- ▶ **Weight:** 11,200 lbs
- ▶ **Length:** 44'-3"
- ▶ **Width:** 101" overall
- ▶ **Deck Length:** 26'-3"
- ▶ **Deck Height:** 33"
- ▶ **Deck Flooring:** 1 3/4" - Hardwood Outside, 1" Center
- ▶ **Main Beams:** 14" I-beam with 4" I-beam Truss
- ▶ **Goose Neck:** Smooth Neck - Wood Filled, 60" Steel Check Plate Ramp
- ▶ **King Pin Settings:** 18"
- ▶ **King Pin Swing Radius:** 84"
- ▶ **King Pin Height:** 48"
- ▶ **Crossmembers:** 6" I-beam - Pierced through Mainbeams
- ▶ **Side Rails:** 8" I-beam
- ▶ **Dovetail:** 56" Covered with Steel Check Plate and Traction Bars
- ▶ **Wheel Well:** Covered with Steel Check Plate
- ▶ **Loading Ramp:** Spring Assisted - Self Cleaning 24" x 60"
- ▶ **Landing Gear:** 50,000 lbs Capacity
- ▶ **D Ring:** 10 Total - 8 on Bed - 2 on Neck
- ▶ **Axle:** (2) 22,500 lb. Capacity - Brakes 12 1/4" x 7 1/2" - Auto Slack, ABS - 2S/1M
- ▶ **Suspension:** Hutch - 3 Leaf Heavy Duty Springs, 46,000 lbs Capacity
- ▶ **Wheels:** Disc - Hub Piloted
- ▶ **Tires:** 235/75R17.5 Radials
- ▶ **Toolbox:** In Dovetail and Neck
- ▶ **Wiring:** Sealed Wiring Harness - Grote
- ▶ **Lights:** Sealed Lights Rubber Mounted - Grote
- ▶ **Paint:** Sand Blasted and Painted with Two Part Acrylic Polyurethane
- ▶ **Color:** Haulass High Gloss Black

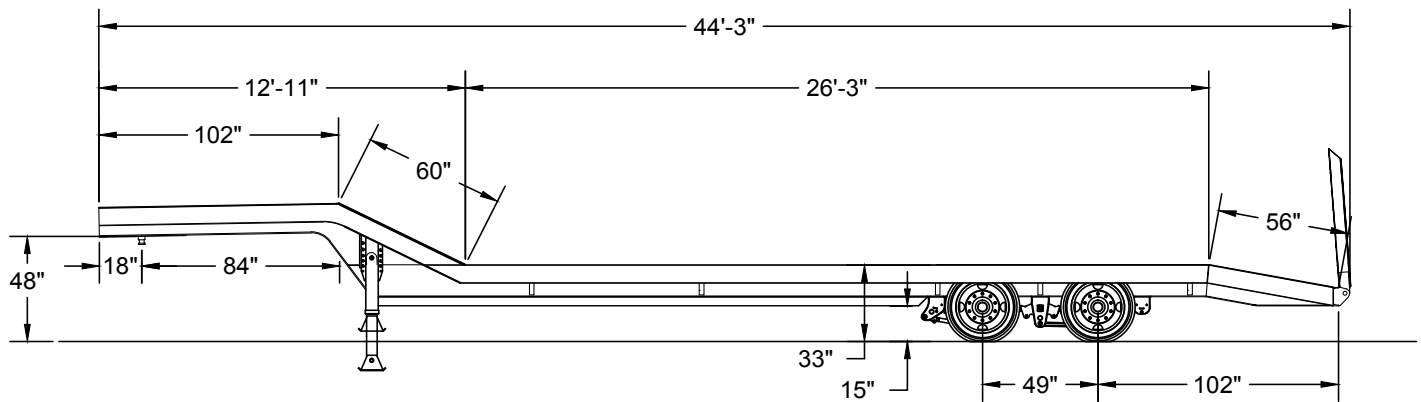

Note: All specifications are subject to change without prior notification. All dimensions and weights are approximate. Axle placement and legal load ratings are dependent upon federal, state, and local regulations, GAWR and tire ratings.