

# RUN 1500

SOLEMYO OPERA BLUEBUS 24V

**For sliding gates weighing up to 1500 kg.**

**Versions with electromechanical limit switch (RUN1500) and with inductive limit switch (RUN1500P).**

**User-friendly:** the BlueBUS technology, enables to power and control a maximum of 7 couples of photocells from the MoonBus series using two wires only.

**Practical:** the control unit and PS124 buffer battery (optional) can be connected by means of a simple connector and can be housed directly inside the motor.


**Advanced:** the temperature sensor adapts the motor force to weather conditions, setting the thermal cut-out protection accordingly; a master/slave selection automatically synchronises 2 motors, enabling the automation of sliding gates with two opposing leaves.

**Intelligent:** thanks to the obstacle detection system and automatic programming of the working times. Self-diagnosis by means of a flashing light. 8 programming levels.

**Safe:** acceleration and deceleration can be adjusted at the beginning and end of each opening and closing manoeuvre.

**Sturdy:** aluminium release handle for easy opening.

**Very quiet:** gear motor on bearings.

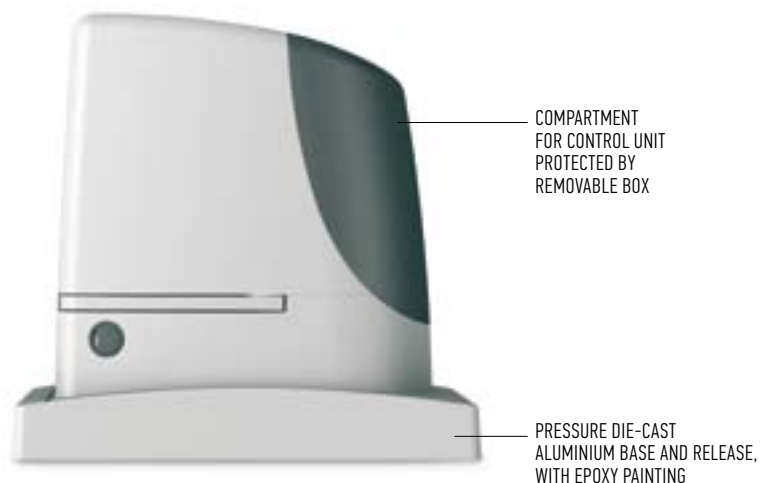

CODE	DESCRIPTION	PACK/PALLET
RUN1500	IRREVERSIBLE, 24 Vdc, WITH BUILT-IN CONTROL UNIT, WITH ELECTROMECHANICAL LIMIT SWITCH, FOR SLIDING GATES WEIGHING UP TO 1500 kg	12
RUN1500P	IRREVERSIBLE, 24 Vdc, WITH BUILT-IN CONTROL UNIT, WITH INDUCTIVE LIMIT SWITCH, FOR SLIDING GATES WEIGHING UP TO 1500 kg	12

## TECHNICAL SPECIFICATIONS

CODE	RUN1500/1500P
<b>ELECTRICAL DATA</b>	
POWER SUPPLY (Vac 50/60 Hz)	230
ABSORPTION (A)	2
POWER (W)	400
<b>PERFORMANCE DATA</b>	
SPEED (m/s)	0.25
FORCE (N)	1000
WORK CYCLE (CYCLES/HOUR)	60
<b>DIMENSIONAL AND GENERAL DATA</b>	
PROTECTION LEVEL (IP)	44
WORKING TEMP. (°C MIN/MAX)	-20 ÷ +50
DIMENSIONS (mm)	400x255x390 h
WEIGHT (kg)	19

## DIMENSIONS

