Onesie Outfit – Boy Sewing directions Use 1/4" seams throughout


- 1. With right sides together, sew shirt front pieces to main section at shoulders. Repeat with lining or coordinating fabric.
- 2. Press shoulder seams toward the back of garment on print fabric. Press the shoulder seams toward the fronts on the lining. Match the lining to the garment right sides of fabrics together. Use pins to hold together.
- 3. Start sewing at the right front edge of diaper, pivot at first corner, then continue to sew completely around Onesie. Be sure to leave the top of diaper front section open.
- 4. Clip the corners and curves.
- 5. Turn right side out by reaching through the shoulder and pulling the fronts out. Use a blunt object such as a chopstick, crochet hook, or knitting needle to gently push out the corners.
- 6. Turn raw edge of opening to inside (about 1/4") and topstitch closed about 1/8" from fold. Continue the stitching all around the Onesie overlapping the stitching about 1/2" to finish.
- 7. Press the Onesie with the iron.
- 8. Sew the Velcro on by machine, stitching all around each bit. Never use glue! Overlap the stitches to make them very secure. The soft piece is always on the lining side. Think about it! When the Onesie is laid open, you should find only soft Velcro. That is what is next to baby's tender skin. The (rough) side of Velcro is stitched to the outer fabric.


The preferred way to sew the Velcro onto preemie garments.

- 1. Blunt the corners by cutting with sharp scissors.
- 2. Sew all around each piece, overlapping the stitching on one side.
- 3. Stitches should fall off the Velcro and into the garment fabric at the blunted corners.
- 4. Sewing on Velcro in this manner eliminates harsh corners.

Enlarged View of Velcro with stitching:

For Threads of Love (TOLSA) use only (Not for profit or charity distribution)



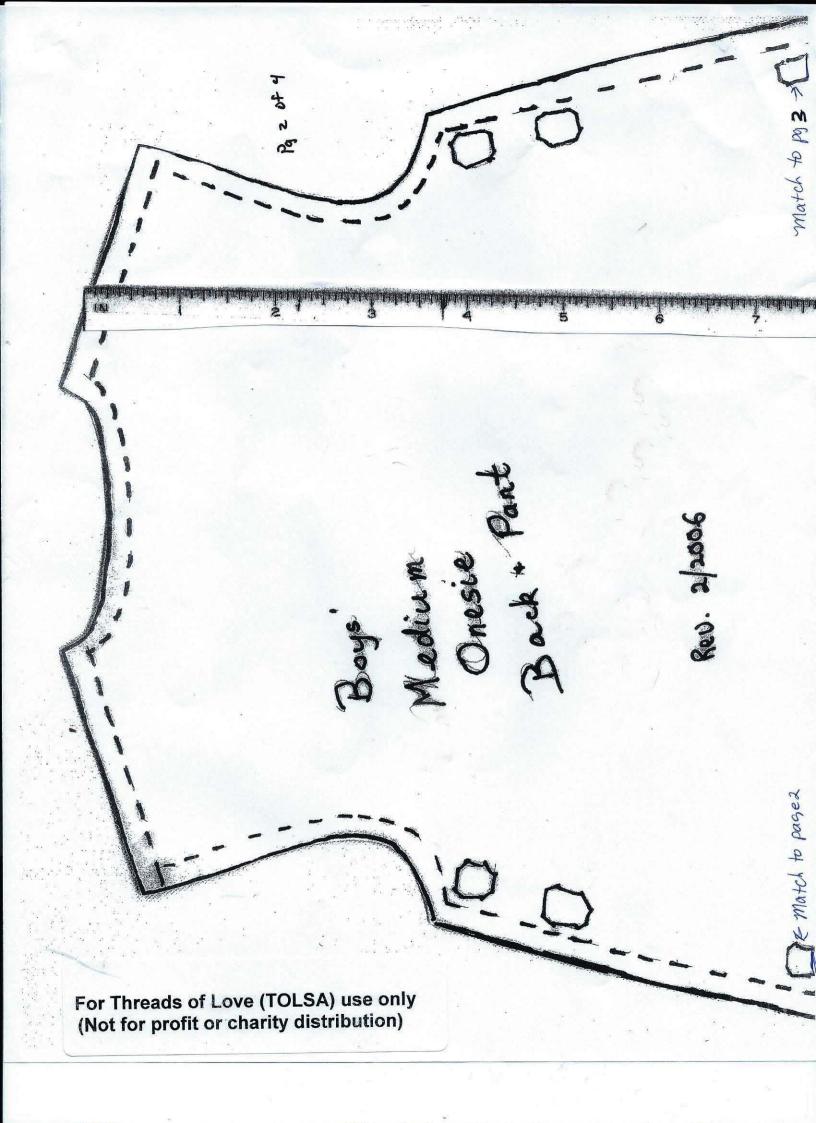

Emasch to page 1 urn under allowance turn under bill ausance match to pa2 -> 30 3 of 4

