

# RPD-2020


# Pole Display



## **SPECIFICATIONS**

Model	RPD-2020
Display method	Vacuum fluorescent display
Number of character	40 characters ( 20 columns x 2 lines)
Interfaces	USB Port / Rs232Port
Brightness	>700 cd/m <sup>2</sup>
Character type	96 ASCII, Alphanumeric
Character font	5 x 7 dot matrix
Power supply	12VDC

Power consumption	< 6W
Power on time	25000 hours
Commands	EPSON, Norriake, futaba, PL-200, UTC Standard, UTC
Height	ENHANCE, AEDEX, ADM787, DSP800, CD5220(PTC),
Panel	EMAX, LOGIC, POS7300
Support	17mm,30mm,42mm,54mm adjustable
Dimension	225 (W) x 92 (H) x 62 (D) mm
Base	171 mm, 171+120 mm, 171+120+120 mm
Viewing angle	220 (L) x 110 (W) x 72 (H) mm
Rotation angle	8 - 35 degrees
Weight	Maximum 270 degrees
Environmental	1.08 Kg
Condition	Operating temperature : -10 - 55 C
Applicable standards	Storage temperature : -20 - 65 C

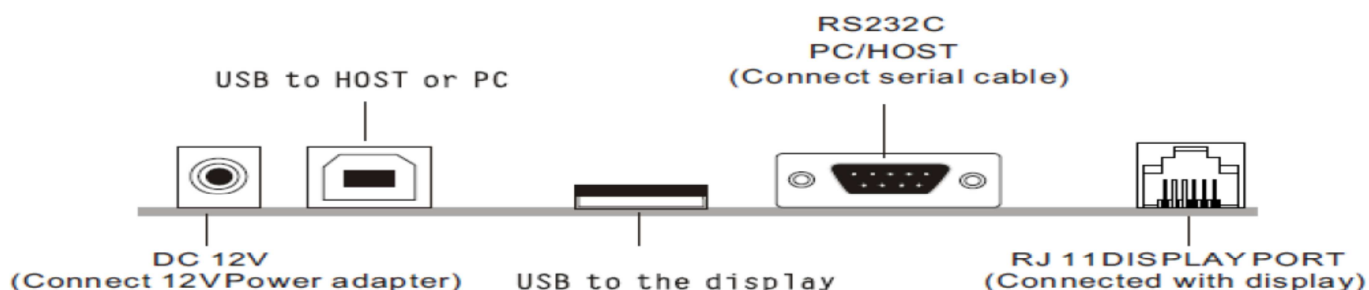

**Phone: 9004566257 / 7738647344**

**Email: [sales@realpostechonology.in](mailto:sales@realpostechonology.in)**