

# LED STREET LIGHT


These stylish LED street lights are an ideal low energy replacement for HID lighting solutions. With an IP67 ingress protection, and a minimum 100µm corrosion resistant polyester powder coating, they are built to withstand the elements for maintenance-free years of service. The ultra modern design enhances any application.

## Features

- cULus and DLC Listed
- Class II isolation protection
- CCT: 3000K/4000K/5000K
- LED light module and housing are aluminum construction.
- Certified according to 1000h salt-spray testing standard ASTM B117 / ISO 9227:2012 due to minimum 100µm corrosion resistant polyester powder coating.
- Meets 3G vibration per ANSI C136.31-2010
- Mature experience in product R & D, manufacturing and applications enable the highest performance and reliability.
- Ensuring electrical safety opening the drier compartment disengages knife switch, thus automatically disconnecting power to the unit.
- Tool-less hatch opening allows internal components to be readily accessible once luminaire is properly mounted.
- Adjustable tilting angle design permits any necessary adjustment to orient the luminaire with the roadway for proper light distribution. Adjustable tilting angles: 0 degrees, +/-2.5 degrees, +/-5 degrees.
- 4-bolt type clamp assembly to horizontal tenon.
- 15+ light distributions are available for virtually any application.
- 10 year warranty



40W(120v)/80W/120W: 24.65"  
160W/200W/240W: 35.47"

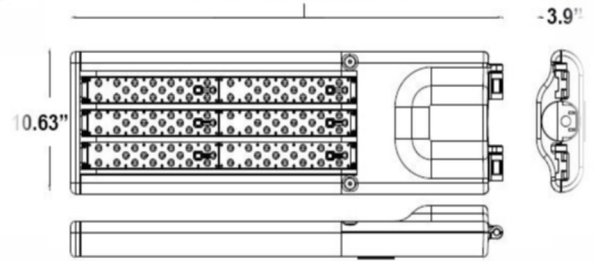

## Specifications

Product Number	Watts	Lumens	Voltage	LED Chip	Driver	IP Rating	Dimensions	Weight	Certs
LC-STR-40W-1056	40W	4100LM	100~277V	CREE	Philips	IP67	24.65"X10.63"X3.90"	16.35LBS	UL/cUL/DLC
LC-STR-80W-1057	80W	8100LM	100~277V	CREE	Philips	IP67	24.65"X10.63"X3.90"	17.22LBS	UL/cUL/DLC
LC-STR-120W-1058	120W	12300LM	100~277V	CREE	Philips	IP67	24.65"X10.63"X3.90"	18.36LBS	UL/cUL/DLC
LC-STR-160W-1059	160W	16300LM	100~277V	CREE	Philips	IP67	35.47"X10.63"X3.90"	22.71LBS	UL/cUL/DLC
LC-STR-200W-1060	200W	20300LM	100~277V	CREE	Philips	IP67	35.47"X10.63"X3.90"	24.03LBS	UL/cUL/DLC
LC-STR-240W-1061	240W	24400LM	100~277V	CREE	Philips	IP67	35.47"X10.63"X3.90"	25.13LBS	UL/cUL/DLC

Ideal for highways, roads, parking lots, streets, and many more applications.



*Doing business by  
The Golden Rule.*

**FOURLEAF INDUSTRIES, LLC**

**Todd Smith**

**317-919-8560**

**Sales@Fourleafindustriesllc.com**