



ROTAVATOR

200 / 300 / 400

Howard
Rotavator
200/300/400



Model R200: Best choice for compact tractors

The R200 model is a compact design affording strength and durability. Ideal for tractors up to 20 hp in gardening, vineyard, and orchard applications.

A unique rotor blade configuration provides ease of penetration with a high level of hp efficiency.

A cantilever hitch design provides compact attachment, makes lifting easy and maximizes available hp.


Trailing board shape allows an even flow of soil and a level finish. Easy to adjust.




Rotavator 200-105. Specially designed for compact tractors.



Chain side drive equipped with 1" chain.

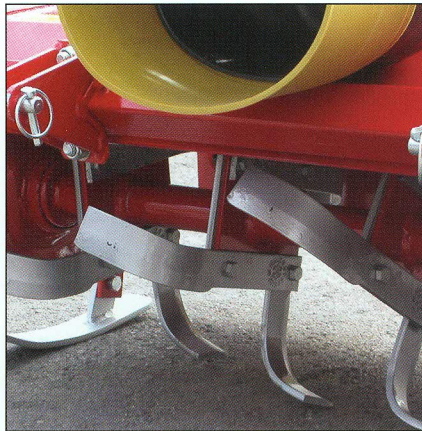

The rotor with blades 9941/42 is very effective.

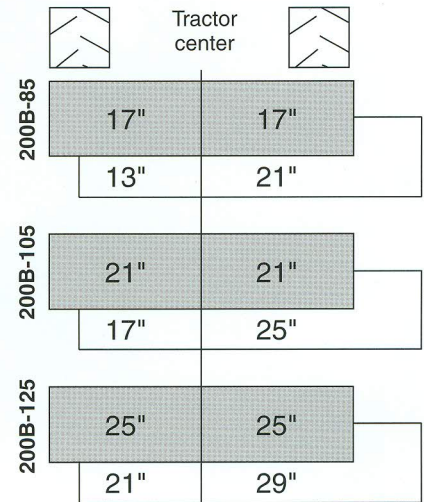

Durable chain side drive

Unlike many competitive models, R200 models are equipped with a heavy 1 inch drive chain for long life.

Adjustable parking stand provides stability for storage and hook-up to tractor.

Rotacadet blades

Rotacadet blades are made of high quality steel for long life. The unique curvature allows penetration of hard soil with ease.

For ease of maintenance, blades are readily exchanged.

Versatile mounting

The R200 can be operated on center or in an offset mounting utilizing the moveable lower brackets.

R200 Specifications

Model	Working width		Transport width		Speed rpm	Weight		Number of blades	Tractor (HP)
	cm	in	cm	in		Kg	Lbs		
200B-085	85	34	102	40	230	132	290	16	12-16
200B-105	105	42	122	48		145	320	20	14-18
200B-125	125	50	142	56		160	350	24	16-20

Models 400B-M, 400S-M and 400S-S

R300 models are designed to meet the needs of general farm, landscaping and industrial work, with model choices in the 25 to 65 hp category. The economical model 400B-M, with single tube frame support and chain side drive, fits nicely into the general but lighter tasks.

R400S-M (single speed) and R400S-S (multiple speed) are designed for heavier tasks and specialized vineyard or orchard applications.

The heavy frame assembly is supported by a double tube assembly for greater stability. A durable gear side drive provides for the efficient transfer of power to a heavy duty 6 blade per flange rotor.



R400S-180M equipped with optional double tube and trailing board springs.

R400 Specifications

	Model	Working width		Transport width		Speed rpm	Weight		Number of blades		Tractor (HP)
		cm	in	cm	in		Kg	Lbs	Rotavator	Rotacadet	
Single speed chain drive	R400B-080M	80	30	102	40	232	240	529	18	-	25-30
	R400B-090M	90	35	112	44		255	562	21	-	30-35
	R400B-100M	100	40	122	48		276	606	24	-	30-40
	R400B-115M	115	45	137	54		295	650	27	-	35-45
	R400B-130M	130	50	152	60		310	683	30	-	40-50
	R400B-140M	140	55	162	64		325	716	33	-	40-55
	R400B-155M	155	60	177	70		340	749	36	-	45-55
	R400B-165M	165	65	187	74		355	782	39	-	45-60
	R400B-180M	180	70	202	80		375	827	42	40	45-60
	R400B-190M	190	75	212	83		390	860	45	-	50-60
Single speed gear drive	R400B-205M	205	80	227	89	405	893	48	44	50-65	
	R400S-080M	80	30	102	40	245	540	18	-	25-30	
	R400S-090M	90	35	112	44	280	573	21	-	30-35	
	R400S-100M	100	40	122	48	280	617	24	-	30-40	
	R400S-115M	115	45	137	54	300	661	27	-	35-45	
	R400S-130M	130	50	152	60	315	694	30	-	40-50	
	R400S-140M	140	55	162	64	330	727	33	-	40-55	
	R400S-155M	155	60	177	70	345	760	36	-	45-55	
	R400S-165M	165	65	187	74	360	793	39	-	45-60	
	R400S-180M	180	70	202	80	380	838	42	40	45-60	
Multiple speed	R400S-190M	190	75	212	83	395	871	45	-	50-60	
	R400S-205M	205	80	227	89	410	904	48	44	50-65	
	R400S-130S	130	50	152	60	330	727	30	-	40-50	
	R400S-140S	140	55	162	64	345	760	33	-	40-55	
	R400S-155S	155	60	177	70	360	793	36	-	40-55	
	R400S-165S	165	65	187	74	375	827	39	-	45-60	
	R400S-180S	180	70	202	80	395	871	42	40	45-60	
	R400S-190S	190	75	212	83	410	904	45	-	50-60	
	R400S-205S	205	80	227	89	425	937	48	44	50-65	

Subject to alternative changes reserved.



In Canada contact: Kongskilde Limited
 680 - 710 Wright Street, Strathroy, Ontario, Canada N7G 3H8
 Tel: (519) 245-9917 Fax: (519) 245-8293
 E-mail: mail@kc.kongskilde.com

In USA contact: Howard USA Inc.
 2439 S Main, Unit 2, Bloomington, Illinois, USA 61704
 Tel: (309) 820-1090 Fax: (309) 820-1364
 E-mail: mail@kus.kongskilde.com

Website: www.kongskilde.com

REPRESENTED BY:

101002194 KC/GBR 200-300-400/BRO0104 PRINTED IN CANADA