


# Sustainable Coils LLC

## Replacement Coil Solutions!

### MOBILE HOME COILS

Revision Date: 02/02/2020

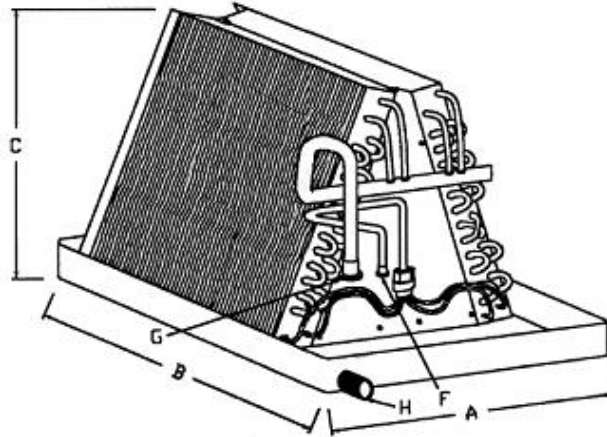

COIL MODEL	COIL WEIGHT	A	B	C	F	G	H
1024A-MH	22	18	19 1/2	16 1/2	3/8	3/4	3/4
1036A-MH	27	18	19 1/2	14 1/2	3/8	3/4	3/4
1048A-MH	32	18	19 1/2	18 1/2	3/8	7/8	3/4
1064A-MH	38	18	19 1/2	18 1/2	3/8	7/8	3/4
1448A-MH+4X4	33	18	19 1/2	18 1/2	3/8	7/8	3/4
1449A-MH+4X4	39	18	19 1/2	18 1/2	3/8	7/8	3/4

Hairpin Tube: UNIGUARD® by Virtus Precision Tube, 3/8" O.D. 422 copper alloy  
 Rows/FPI: 2 rows, 14 FPI: 1024A-MH  
 3 rows, 14 FPI: 1036A-MH, 1048A-MH, 1448A-MH4X4  
 4 rows, 12 FPI: 1064A-MH, 1449A-MH+4X4  
 End Plates: Aluminum  
 Metering: Piston metered for R-22 refrigerant, additional R-410A piston optional  
 1448A-MH+4X4, 1049A-MH+4X4 includes R410a TXV  
 Refrigerant connections: Pre-swaged  
 IRV (cu. In.): 1024A=97.81 1036A=128.39, 1048A=165.08, 1064A=219.27  
 1448A-MH+4X4=165.08, 1449A-MH+4X4=219.27  
 Drain Pan: Nylon resin pans are UL 94, 5VFR rated and U.V. safe  
 Holding Charge: Dry nitrogen  
 Warranty: Five year replacement

Please visit our website [www.SustainableCoils.com](http://www.SustainableCoils.com) for further information regarding our complete product line.

Telephone: (903) 881-6006

Fax: (903) 881-6008

email: [sales@sustainablecoils.com](mailto:sales@sustainablecoils.com)