

LLSV SERIES

UL 1598A

“MARINE TYPE” LED LINEAR FIXTURE



LLSV	-	4	-	3	-	S
1	-	2	-	3	-	4

1) SERIES

LLSV

2) LENGTH

2- 2' NOMINAL LENGTH

4- 4' NOMINAL LENGTH

3) LAMPS

1- 1 LED LAMP W/ INTERNAL DRIVER

2 - 2 LED LAMPS W/ INTERNAL DRIVER


3 - 3 LED LAMPS W/ INTERNAL DRIVER

S - LED LIGHTING STRIP W/ DRIVER IN FIXTURE HOUSING

4) MOUNTING OPTIONS

S - STANDARD

O - SPECIAL MOUNTING OPTIONS

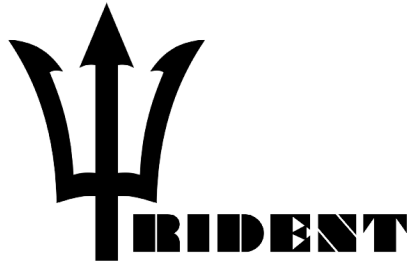

SPECIFICATIONS

CONSTRUCTION	CORROSION-RESISTANT, IMPACT-RESISTANT, UV-STABILIZED NYLON HOUSING THERMOSET HIGH REFLECTANCE, WHITE POLYESTER POWDER COATED REFLECTOR
HARDWARE	STAINLESS STEEL 316 FOR ADDED DURABILITY
LAMP HOLDERS	VIBRATION-RESISTANT, SPRING-LOADED LAMP HOLDERS
LENS	HIGH-IMPACT POLYCARBONATE LENS WITH PRISMATIC FINISH
LIGHT SOURCE	15 WATT LED T8 RETROFIT TUBES (1-3) • 5000K LED STRIP LIGHTING COMES WITH INTERNAL UNIVERSAL DRIVER
POWER SOURCE	AC 120 OR 120V/277V, 50 HZ/60 HZ
WIRING	3/4 INCH NPT THREADED CONDUIT OPENINGS ON BOTH ENDS
MOUNTING	STAINLESS STEEL MOUNTING FEET
WEIGHT	2 FOOT (PACKAGED) - 8.7 LB (3.9 KG) 4 FOOT (PACKAGED) - 13.4 LB (6.1 KG)
WARRANTY	1 YEAR WARRANTY

