ASW Switch for Dwarf Signal

[1] Installing the Switch

Orient the switch on the turnout so that the switch control arm is depressed when the turnout is thrown to the diverging route position. Use the two screws provided along with some cement to secure the switch to the turnout ties.

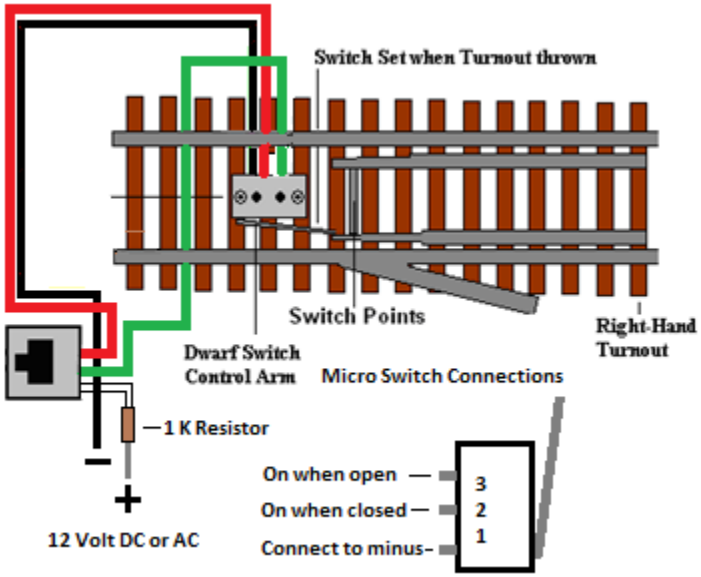

Connecting the Wires

[1] The black wire from the switch is connected to the minus (-) from the power supply.

[2] The red wire from the switch is connected to the Dwarf light that is on when the switch is closed.

[3] The green wire from the switch is connected to the Dwarf light that is on when the switch is open.

[4] The white wire from the dwarf is positive and connects to the power supply positive (+) along with a 1K resistor

ASW Switch for Dwarf Signal

[1] Installing the Switch

Orient the switch on the turnout so that the switch control arm is depressed when the turnout is thrown to the diverging route position. Use the two screws provided along with some cement to secure the switch to the turnout ties.

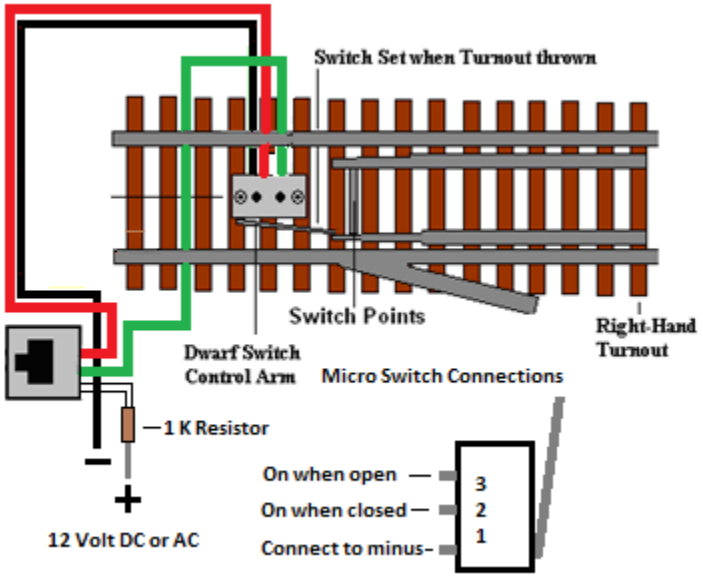

Connecting the Wires

[1] The black wire from the switch is connected to the minus (-) from the power supply.

[2] The red wire from the switch is connected to the Dwarf light that is on when the switch is closed.

[3] The green wire from the switch is connected to the Dwarf light that is on when the switch is open.

[4] The white wire from the dwarf is positive and connects to the power supply positive (+) along with a 1K resistor