

CLOPAY COMMERCIAL – MODELS 3720, 3721, 3723 energy series with intellicore®



Model 3720, 22'2" x 14' doors

| CONSTRUCTION | EFFICIENCY | WARRANTY |
|------------------------|------------------------|--|
| 2" THICKNESS | 18.4 R-VALUE | 10YR LIMITED CONSTRUCTION |



POLYURETHANE INSULATED STEEL DOORS

Clipay Models 3720, 3721 and 3723 are for commercial and industrial facilities where ease of maintenance, versatility and durability considerations are all important.

- **Intellicore®** insulation provides the highest energy efficiency, while remaining environmentally friendly.
- **Steel-Sandwich Construction** enhances durability and strength.
- **3-Stage Paint Process** delivers a maintenance-free finish.
- **Thermal Break** enhances insulating properties for extreme energy efficiency.
- **Optional Accessories** add functionality while complementing the building.



Panels are pre-painted inside and out to inhibit rust. Hot-dipped, galvanized steel is painted with primer and given a tough oven-baked polyester top coat to provide the most rust-resistant steel door available. Ten-year warranty against rust-through.


clipaycommercial.com

PANEL DESIGN



COLOR OPTIONS

MODEL 3720

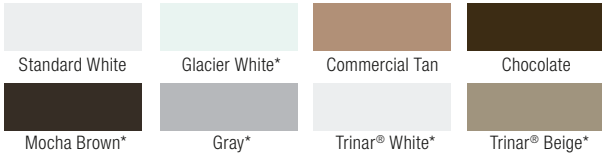

ADDITIONAL COLORS FOR MODELS 3721, 3723



CUSTOM PAINT OPTION



Color Blast™ offers more than 1,500 Sherwin-Williams® color options to complement your building design. Clopay's durable factory finish has been thoroughly tested and is backed by a five-year warranty.

Due to solar reflective formulation to meet greater than an 38 LRV some colors may not be available.

FEATURES

STANDARD HARDWARE

- 18 gauge single-end stiles; 16 gauge double-end stiles
- PVC vinyl astragal with aluminum retainer
- Commercial 10-ball steel rollers (nylon tires available)
- Steel step plate and lift handle
- Heavy-duty galvanized end stiles
- Inside slide lock for increased security
- 19 gauge steel hinge support plates
- 2" (50.8 mm) or 3" (76.2 mm) track
- 10,000 cycle springs
- Galvanized aircraft cable with minimum 7:1 safety factor
- Variety of track configurations to meet building specifications

MATERIALS AND CONSTRUCTION

| | |
|--------------------|---|
| Panel Thickness | 2" (50.8 mm) |
| Insulation | CFC and HCFC-free Intellicore® polyurethane |
| R-value | 18.4* |
| Thermal Break | Continuous foam |
| Exterior Steel | 27 gauge (.016" min.) (.41 mm) |
| Interior Steel | 28 gauge (.015" min.) (.38 mm) |
| Exterior Surface | Stucco embossed, minor ribbed (3720) Woodgrain embossed, flush (3721) Woodgrain embossed, elegant raised (3723) |
| Max Width | 3720: 36'2" (11 m); 3721, 3723: 24'2" (7.4 m) |
| Max Height | 3720: 26' (7.9 m); 3721, 3723: 18' (5.5 m) |
| Exterior Colors | Standard White, Glacier White, Almond, Desert Tan, Sandtone, Commercial Tan, Chocolate, Mocha Brown, Gray, Trinar® White and Trinar® Beige. Also available in Color Blast™. |
| Interior Color | Standard White |
| Limited Warranties | 10-Year delamination 10-Year rust-through 1-Year material and workmanship |

*Calculated door section R-value is in accordance with DASMA TDS-163. For special sizes, applications and options, consult Commercial Information Assistance (CIA) at 1-800-526-4301.




For more information on these and other Clopay products, call 1-800-526-4301 or visit clopaycommercial.com



©2016 Clopay Building Products Company, Inc., a Griffon company.


ADDITIONAL OPTIONS

WINDOW OPTIONS

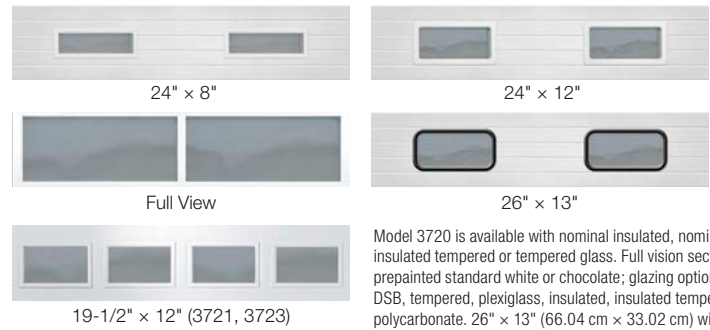

Model 3720 is available with nominal insulated, nominal insulated tempered or tempered glass. Full vision section, preprinted standard white or chocolate; glazing options include DSB, tempered, plexiglass, insulated, insulated tempered and polycarbonate. 26" x 13" (66.04 cm x 33.02 cm) windows are available with Lexan® or plexiglass. Models 3721 and 3723 are available with DSB, plexiglass and insulated glass.

HEAVY-DUTY HARDWARE (where not standard)

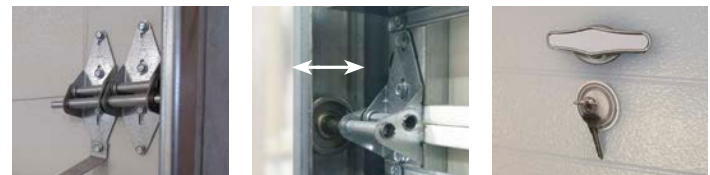

Double-end hinge

3" Track

Outside keyed lock

HIGH CYCLE SPRINGS



25,000, 50,000 or 100,000 cycle springs available.

MULLIONS



Carry-away, roll-away or swing-up mullions are available on select sizes.

BREAK-AWAY SECTION*



Single section and double sections available on select sizes.

PASS DOOR*



32" wide x 80" high (.81 m x 2.3 m), max 16'2" (4.9 m) wide section.

EXHAUST PORT



Can be cut into any type of sectional door. Available in select sizes.



WINDCODE® doors are available in many sizes and pressure ratings.



Upgrade your standard door with industrial-grade components.

*Not available on Models 3721 and 3723.

DISTRIBUTED BY:

