


IP19C • IP25C LedPoster Digital Displays



- High Refresh Rate and Brightness
- Wide Viewing Angle
- Realistic Color Reproduction
- Multiple Installation Configurations
- Single Display or Multi-Screen Cascade
- Easily Controlled with SmartPhone or Computer via USB or Wi-Fi

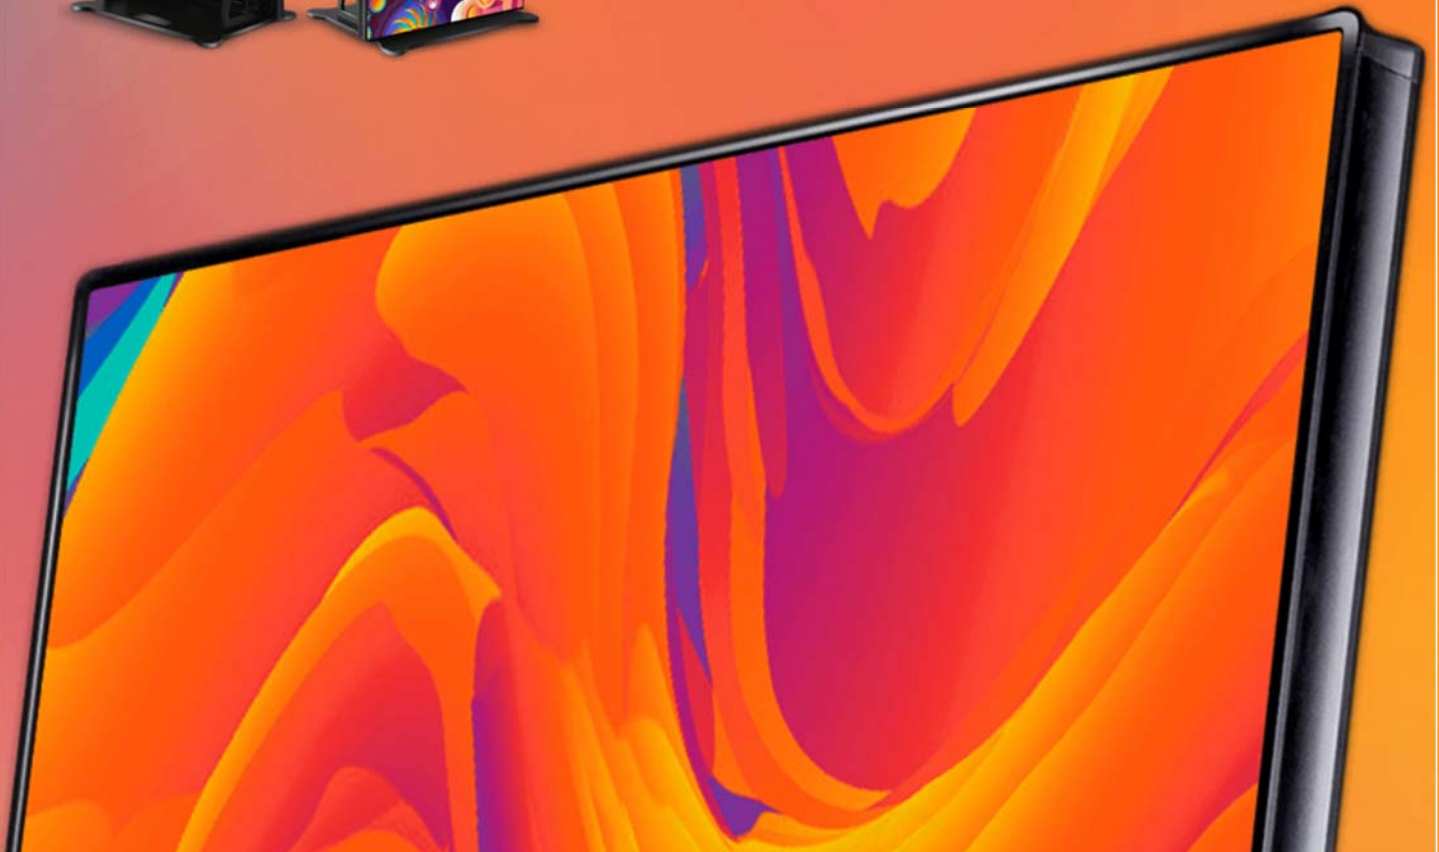

Multiple Installation Configurations

Versatile installation options for all digital signage applications.




bracket standing




base standing installation



hanging

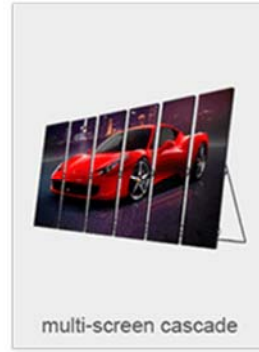

multi-screen cascade

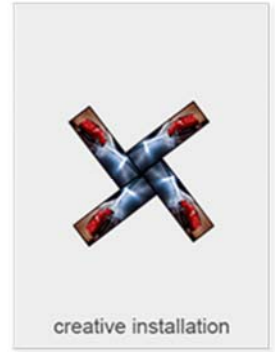

creative installation

Model:

IP19C

IP25C

LAMP	LED Type	SMD(1010)	SMD(2020)
MODULE	Pixel pitch	1.944 mm (0.0765 in)	2.5 mm (0.0984 in)
	LED module size	210 × 280 mm (8.27 x 11.02 in)	210 × 280 mm (8.27 x 11.02 in)
	Resolution (H×W)	108 × 144	84 × 112
	LED driving method	1/27 dynamic scan	1/28 dynamic scan
CABINET	LED module layout (H×W)	9 × 2	9 × 2
	Resolution (H×W)	972 × 288	756 × 224
	Display area	1.06 m ²	1.06 m ²
	Cabinet size	1902 × 572 × 35 mm (74.88 x 22.52 x 1.38 in)	1902 × 572 × 35 mm (74.88 x 22.52 x 1.38 in)
	Net. Weight	32 kg (70.5 lbs)	32 kg (70.5 lbs)
	Ingress Protection	Front IP40/Rear IP40	Front IP40/Rear IP40
	Power	AC 240/100 ±10%	AC 240/100 ±10%
	Serviceability	Front service	Front service
DISPLAY	Max. Power consumption	750 W	600 W
	Avg. Power consumption	250 W	200 W
	Viewing Angle (H/V)	160°/160°	160°/160°
	Brightness	1000 cd/m ²	1200 cd/m ²
	Pixel density (pixel/m ²)	279,936	169,344
	Contrast ratio	4,000:1	4,000:1
	Temperature / Humidity (Operation/Storage)	-10°C to +40°C; 10% to 90%	-10°C to +40°C; 10% to 90%
	Lifetime (50% brightness)	80,000 hours	80,000 hours
	Processing	16 bit	16 bit
	Colors	281 trillion	281 trillion
	Refresh rate	≥ 2880Hz	≥ 2880Hz
	INPUT	HDMI	HDMI In x 1; HDMI Out x 1
LAN		RJ45 x 3	RJ45 x 3
USB		USB-A x 3; USB-B x 2	USB-A x 3; USB-B x 2
Audio		MiniStereo x 1	MiniStereo x 1

Optional Accessories: Upright Standing Base, Wall Mounting Bracket, Hanging Bracket, 4-in-1 Flight Case, 2-in-1 Flight Case, 4-in-1 Wooden Shipping Case

LedPoster © Transtech LED Co., Ltd. | Distributed by Eiki International, Inc.

30251 Esperanza, Rancho Santa Margarita, CA 92688 · Tel: 800-242-3454 · E-Mail: usa@eiki.com · Website: www.eiki.com

EIKI
Projectors... and more!

TRT
TRANSTECH