




Why Use Fluid Film

Because it is the worldwide standard for corrosion control and equipment maintenance, Fluid Film is tested frequently by the military, government agencies, university researchers and a wide variety of other industries. Results of such testing unfailingly support Fluid Film's position as the most versatile and economical corrosion preventative, penetrate and lubricant.

52 Day Performance Comparison vs Leading Competitive Products

The performance comparison was conducted in the laboratory of Eureka Chemical Company by the methods similar to ASTM B-117. Like the independent laboratory test reported over page, each product was sprayed onto 3" x 6" bare steel panels. The sprayed panels were suspended vertically for 24 hours to simulate end use conditions; they then were transferred to a closed fog atmosphere of 5% salt concentration.

Independent Testing Confirms...Fluid Film is your most effective corrosion protection

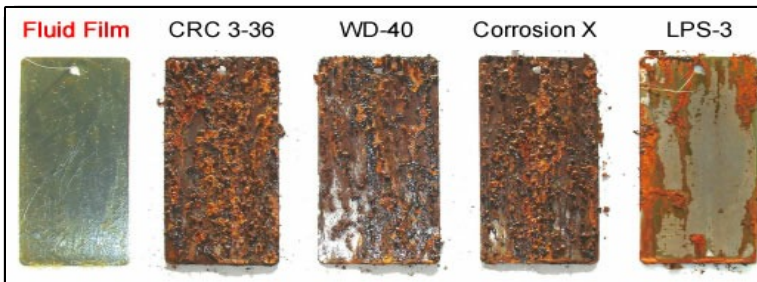

Panels were removed when each reached approximately 95% surface corrosion. Two competitive product panels reached 95% surface corrosion within 14 days, a third in 45 days. (Corrosion X was not included in this comparison). After 52 days, Fluid Film had reached a corrosion percentage of only 5%. This report was made by an independent analytical materials chemistry facility certified by the City of Los Angeles Department of Building and Safety. The tests were conducted to substantiate and update previous 52-day performance testing by Eureka Chemical's own laboratory. (See back page.) For the above report, each product was sprayed onto 3" x 6" cold-rolled steel panels (CRT-SAFE 1008/1010). The panels were air dried 24 hours, then placed in a salt-spray chamber for a total exposure of 504 hours (3 weeks).

* American Society for Testing & Materials -

% of Surface Corrosion

Product	1 Week	2 Weeks	3 Weeks
Fluid Film AS	1%	1%	1%
CRC 3-36	90%	95%	100%
WD-40	40%	55%	85%
Corrosion X	50%	95%	100%
LPS-3	5%	10%	40%

Powerful Rust Corrosion Protection

The comparison of corrosion protection demonstrates Fluid Film's long-term corrosion control economy. In addition, the surface adherence of its lanolin-based formula is self-healing in cases of scoring or similar damage and it remains soft and flexible, does not wash away or crack. Fluid Film can be removed easily from most materials when required. Fluid Film is non-toxic and non-hazardous important considerations in workplace environment and safety. Once applied, Fluid Film's NAS flash point is a high 204C compared to typical 52C solvent-based products. While most products of its kind contain between seventy and ninety percent solvent, Fluid Film contains none, except for the propellant in its aerosol cans. This means that only ten to thirty percent of competing products have usable corrosion control materials. The rest evaporates, contaminating the atmosphere and is useless to the user

GET YOUR FILM ON!

