



ROTAVATOR
HR3

Howard
Rotavator
HR3



Technical information


Specifications	Optional equipment
<ul style="list-style-type: none"> • Four blades per flange type 9941/9942 • Single speed gearbox • Mobile mounting brackets • 3 point linkage cat 0 and 1 • 1" chain side drive • Adjustable skids for depth control • Pto drive shaft with clutch 	<ul style="list-style-type: none"> • Reverse gearbox

Rotavator HR3

Strong among the small tillers. Suitable for any application:


- Seed bed preparation
- Fertilizer and stubble incorporation
- Orchard maintenance
- Gardening and landscape applications

A low power demand provides for efficient work with tractors from 12 to 20 HP.

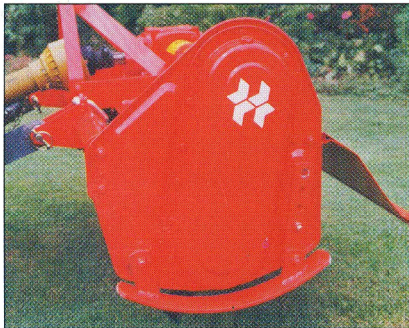

The machine is able to work up to 7" providing a fine tilth and an even finish.

The trailing board's shape is specially designed for a perfect finish and an even flow of the soil.

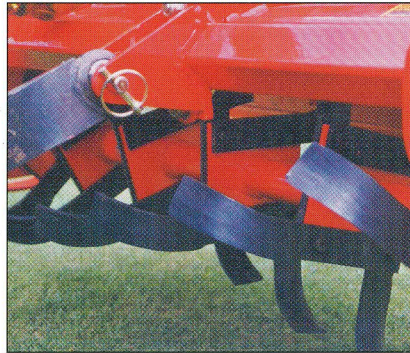


The four blade rotor works in hard conditions with a low power requirement.

Very easy depth control set with the adjustable skids.



The machine can be center or offset mounted utilizing the moveable lower brackets.

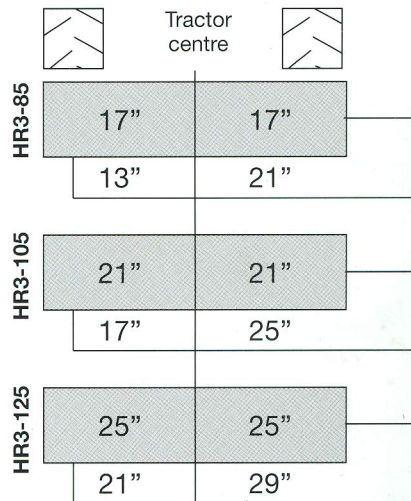

Model	Working width in	Total width in	Weight lbs	Number of blades	Power range	Rotor speed rpm
HR3-30	34	40	290	16	12-16	
HR3-40	42	48	320	20	14-18	230
HR3-50	50	56	350	24	16-20	



In Canada contact: Kongskilde Limited
 231 Thames Rd. E., Exeter, Ontario, Canada N0M 1S3
 Tel.: 519 235-0840 / Fax: 519 235-2931
 E-mail: mail@kc.kongskilde.com

In the USA contact: Howard USA Inc.
 10 S. Jeffers Street, Harvard, Illinois 60033, USA
 Tel.: + 1 815 943 5401, Fax: + 1 815 943 3636
 E-mail: howardusa@owc.net
 Visit website: www.kongskilde.com

Dealer:



**HOWARD ROTAVATOR
 GUY MACHINERY
 14213 WASHINGTON ST.
 IL.HWY 120 WEST
 WOODSTOCK, IL 60098
 (815)- 338-0600**