



Z - COPING MITER

RIGHT

- TAPERED COPING
 FLAT COPING




SPECIFY OUTSIDE FACE OF COPING TO DETERMINE SLOPE

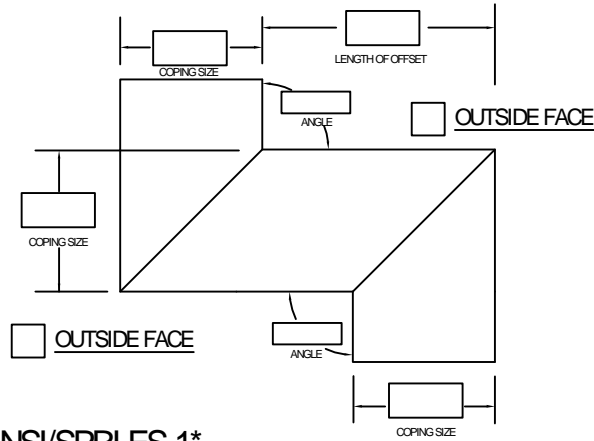


ANSI/SPRI ES-1*

LEFT

- TAPERED COPING
 FLAT COPING



SPECIFY OUTSIDE FACE OF COPING TO DETERMINE SLOPE

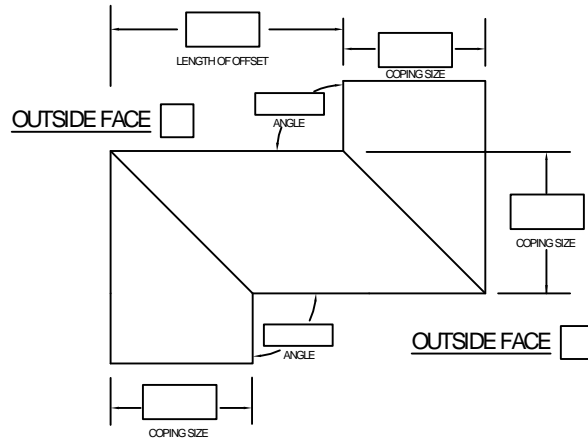

MATERIAL (please choose one):

- | | |
|--|--|
| <input type="checkbox"/> 24 GA Steel | <input type="checkbox"/> .040 Aluminum |
| <input type="checkbox"/> 22 GA Steel | <input type="checkbox"/> .050 Aluminum |
| <input type="checkbox"/> .032 Aluminum | <input type="checkbox"/> .063 Aluminum |

Other: _____

Color: _____

Finish: _____

Quantities:

_____ RIGHT
 _____ LEFT

Miter/End Cap Fabrication Requirements:

- Pop Rivet & Sealed Welded (see note)*

Installation:

- 1) Cleats are to be installed 40" O/C, coping hem crimped to cleat
- 2) 8 - 1.5" SS Ring Shank nails per cleat, minimum
- 3) Splice plates require 2 beads of sealant per side of coping

Sheet ___ of ___

DWG# 740-020

Notes:

- 1) *Accessory Welding is only available in 040 aluminum or heavier
- 2) External splice plates are available upon request
- 3) Written approval is required prior to fabrication, contractor is responsible for all dimensions and quantities. Fabricated items are not returnable.

Temple Architectural Products
 638 Moore Rd
 Avon Lake, OH 44012

Phone: (216) 440-3595
 Alternate: (330) 348-3983
 Fax: (440) 653-9883

Project Name: _____

Installing Contractor: _____

Contact Name: _____

Contact number: _____

Signed Approval: _____