



ALTERNATE CLEANOUT FRAME & LID

(APPROX. WT. 110 LBS.)

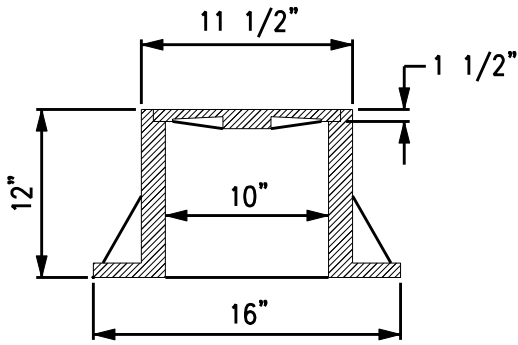


SECTION VIEW
(DIMENSIONS MAY VARY)



AXONOMETRIC VIEW

NOTES:

1. CLEAN OUT FRAME & LID SHALL BE REQUIRED IN ALL HIGH TRAFFIC AREAS INCLUDING, BUT NOT LIMITED TO DRIVEWAYS AND SIDEWALKS.
2. CLEANOUT FRAME AND LID SHALL BE EAST JORDAN 1570 (FRAME) & 2965 (LID), OR AN APPROVED EQUIVALENT.
3. CLEANOUT TOP OF CASTING SHALL BE SET FLUSH WITH FINISHED GRADE.

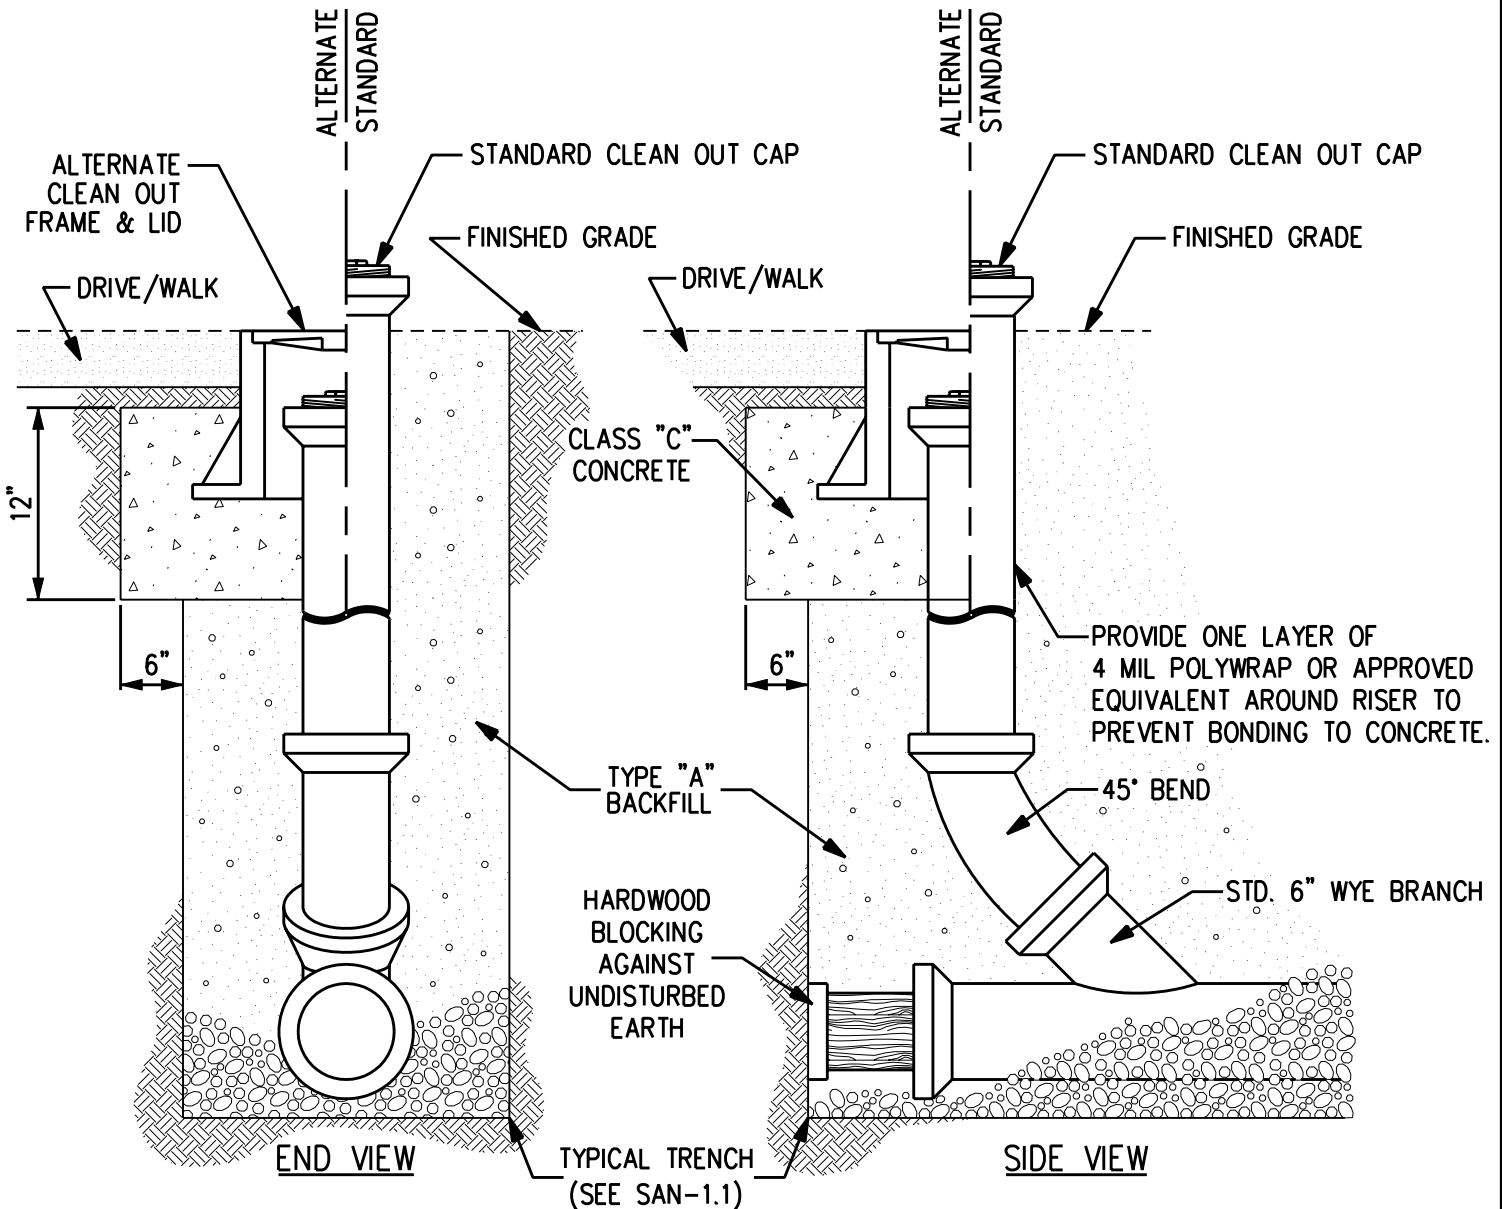

END VIEW

SIDE VIEW

TYPICAL TRENCH
(SEE SAN-1.1)

DATE: 10/20/06

APPROVED: _____
VILLAGE ENGINEER: ADAM D. VORS, P.E.

ADR
& ASSOCIATES, LTD.

88 WEST CHURCH ST
NEWARK, OHIO 43055
(740) 345-1921 (ph)
(740) 345-4994 (fax)

~ THE VILLAGE OF HANOVER, OHIO ~

TYPICAL CLEANOUT DETAIL

SEWER TAP INSTALLATION
STANDARD CONSTRUCTION
DRAWINGS

DRAWING NO.
SAN-2.1
SHEET 1 OF 1