


MEMBRANE COMPRESSION EDGE 1.75

TEMPLE
Architectural Products

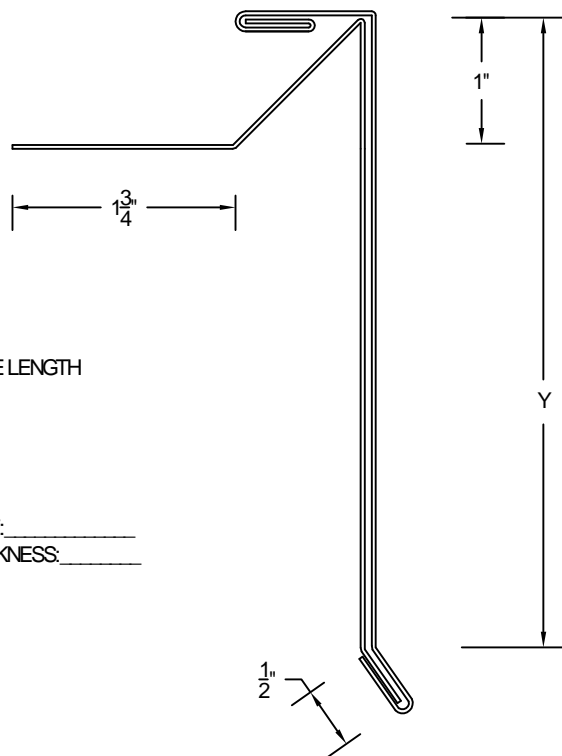

Y = FACE LENGTH

- ☐ 3.75"
- ☐ 4.50"
- ☐ 6.50"
- ☐ 8.00"

MEMBRANE TYPE: _____
MEMBRANE THICKNESS: _____

MATERIAL (please choose one):

- ☐ 24 GA Steel
- ☐ 22 GA Steel
- ☐ .032 Aluminum
- ☐ .040 Aluminum

Other: _____

Color: _____

Finish: _____

Cleat Material:

- ☐ 22 GA Steel (mill)
- ☐ 20 GA Steel (mill)

Quantities:

_____ Total Linear Feet (10'-0" Lengths)

_____ Outside Miter(s): _____ Degrees

_____ Inside Miter(s): _____ Degrees

Miter/End Cap Fabrication Requirements:

- ☐ Pop Rivet & Sealed
- ☐ Welded (see note)*

Installation:

1) Fastened at 6" O/C minimum or otherwise noted.

2) 1.5" SS Ring Shank nails, minimum

3) Splice plates require 2 beads of sealant per side at splice

Sheet ____ of ____.

DWG# 730-013

Notes:

- 1) *Accessory Welding is only available in 040 aluminum or heavier
- 2) 6" wide slip joints are provided (1 per 10'-0" pc/2 per miter/1 per end cap)
- 3) External splice plates are available upon request
- 4) Written approval is required prior to fabrication, contractor is responsible for all dimensions and quantities. Fabricated items are not returnable.

Temple Architectural Products
638 Moore Rd
Avon Lake, OH 44012

Phone: (216) 440-3595
Alternate: (330) 348-3983
Fax: (440) 653-9883

Project Name: _____

Installing Contractor: _____

Contact Name: _____

Contact number: _____

Signed Approval: _____