



# LSM v1.0

## Coating Stripping Machine

- Product design and the technical features may change without notice.

**Yiğın Global Machinery Industry & Trade Co. Ltd.**

Kanuni Mah. 772. Sok. 33/A, Keçiören, Ankara, 06280 TURKEY



+905322475192



@ alper@yigin.com

[www.yigin.com](http://www.yigin.com)



YIGIN GLOBAL MACHINERY  
INDUSTRY & TRADE CO. LTD.





2 stainless steel (316 grade)  
ultrasonic tanks with  
agitation arm

and

1 stainless steel (316 grade)  
rinse sink with retractable  
faucet

Each detergent tank  
can hold up to 48  
lenses and lens  
clips. Total of 96  
lenses or clips.

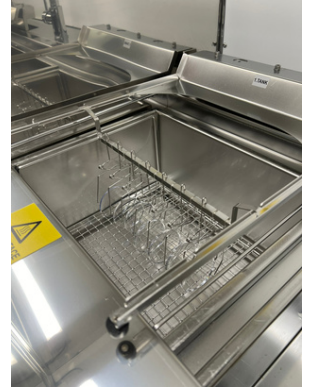

Agitation movement for  
intensive cleaning

Pneumatic arms for rest  
after the process  
completes



Modern closed cabin  
design for ultimate EHS  
conformity

Easy Access Safety  
Windows



Retractable faucet for  
easy rinsing

Rinsing tank with  
Ultrasonic Transducers  
& Heater for additional  
cleaning function

User friendly  
HMI Control Screen  
Temperature,  
Ultrasonic Power  
and Timer can be  
programmed.



### Technical Details

Dimensions & Weight:  
1730 x 800 x 1900 mm / 68 x 31,5 x 75 inches (exhaust  
fan excluded for height)  
~350 kg. / 770 lbs

Tanks:  
All 3 tanks: 38 liters - 400 x 400 x 200 mm  
1st and 2nd tanks can clean up to 48 lenses or clips.  
Middle tank for rinsing is also good for misc. parts'  
cleaning.

Consumption: ~8 KW  
Power: 230 V 1PH + N + PE or 400 V 3PH + N + PE

CE, ISO 9001:2015 certified production

Compressed Air (4 - 6 bar) needed for pneumatic lift

• Product design and the technical features may change without notice.



Automatic detergent  
filtration for both US  
tanks. (Magnetic  
Pump Circulation)

**Yiğın Global Machinery Industry & Trade Co. Ltd.**

Kanuni Mah. 772. Sok. 33/A, Keçiören, Ankara, 06280 TURKEY

+905322475192

@ alper@yigin.com

www.yigin.com