



GENERAL NOTES :

- 1. PROVIDE GFI OUTLETS IN RESTROOMS AS REQ'D. AND EXHAUST FANS (750 CFM MIN. EACH) IN MEN / WOMEN RESTROOMS AND TWO 500 CFM
- EXHAUST FANS IN SHOWERS. FANS MFG. BY PENN ZEPHYR OR APPROVED EQUAL.
- 2. ALL PLUMBING WORK SHALL CONFORM WITH IBC-PLUMBING CODE REQUIREMENTS. AND ANY OTHER HAVING JURISDICTION OVER THE WORK.
- 3. SEE ADDITIONAL GENERAL NOTES ON DWG. A-1
- 4. ANY DESCREPANCY OR INTERFERENCE SHOULD BE REPORTED TO THE ARCHITECT.
- IN WRITING IMMEDIATELY. 5. OWNERS OPTION TO SELECT TIOLETS FIXTURES ON ARCHITECTURAL DRAWINGS,
- AND PLUMBING DRAWINGS OR APPROVED EQUAL.
- 6. PROVIDE AS REQUIRED ALL THE STEEL BRACKETS, ANCHORS AND WALL REINFORCING FOR THE COUNTER TOPS TO SUPPORT THE FIXTURES AND COUNTER TOPS SELECTED BY THE OWNERS.

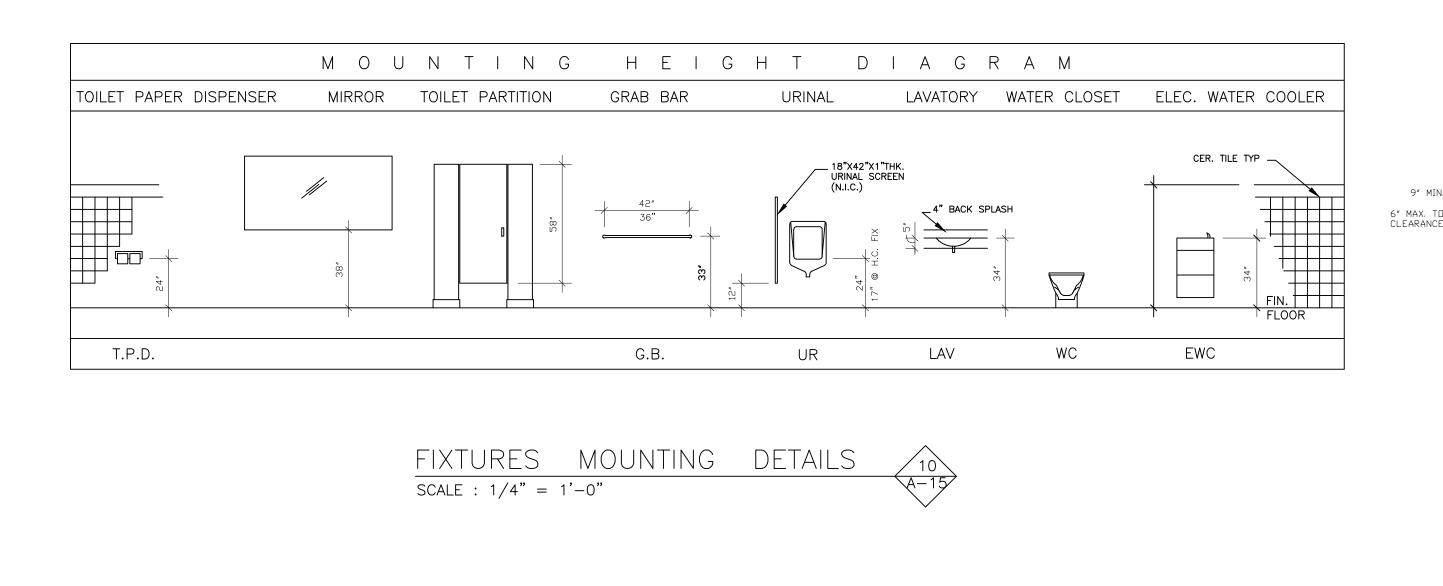

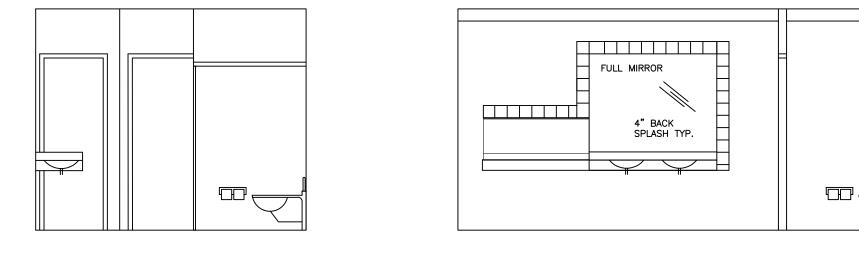

DEVONSHIRE 18-1/8" UNDERMOUNT SINK GRANITE COUNERTOP OR APPROVED EQUAL. W/ CHICAGO FAUCETS AS REQ'D.

AMERICAN STANDARD CADET 17" H 3043.102 TOP SPUD W/ OLSONITE #95 OPEN FRONT SEAT LESS COVER AND W/ SLOAN ROYAL FLUSHOMETER

