


INSTALLATION INSTRUCTIONS

D'TTACH 2" HITCH ASSEMBLY (DTHALL-PRO)

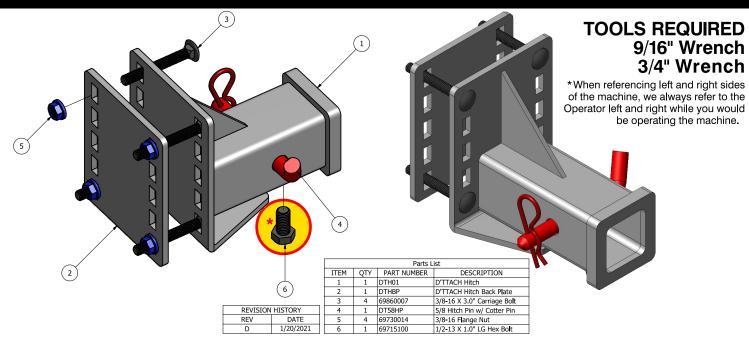

- Install the hitch and back plate to the mower cross member bar, centering with unit and setting the height as close to 13" to center of hitch as possible. (The ground to the center of the hitch tube - see picture below)
- 2) You can achieve the proper height of installation (13" from ground to center of hitch tube) by installing the carriage bolts through the hitch and hitch plate within the series of five vertical mounting holes.
- 3) Tighten the four carriage bolts, securely installing the DTHALL to the mower cross member.
- 4) Secure & Tighten Hex Bolt (#6) OPTIONAL. * NOT FOR USE WITH DETHATCHER RAKE, RAKE NEEDS TO BE ABLE TO PIVOT FOR BEST PERFORMANCE.

HITCH DISCLAIMER: 90 Day Limited, 1 yr Structural Warranty
The D'ttach Front Mount Hitch is not an "Automotive Class Hitch". It is a mower accessory that is used as a receiver for D'ttach Commercial Mower Attachments and not intended to be used as an automobile hitch. Do not drive heavy attachments, such as the D'ttach Pile Driver Leaf Plow or the KartMate Kart, excessively in the raised or "stow" position. The heavy weight of the attachment while driving will flex the hitch and potentially bend the hitch and void the warranty.







Visit www.dttach.com/support.html

for Product Support, IPL's, Product Literature, Instructions & Tutorial Videos D'ttach MFG. 83-A Comsewogue Rd, E. Setauket, NY 11733 631-642-7445

