


AUTOMATE™ | Li-ion SW1.1

PART #	DESCRIPTION	L in. (mm)
MTDCBSW25-1.1	DC Tubular motor with in-built Lithium-ion rechargeable battery	17.56" (446)
MTSW24-W	Control Wand for Li-ion SW1.1 motor with Micro USB charging port	24" (610)
MTSW36-W		36" (914)
MTSW48-W		48" (1219)


FEATURES

- Simple limit setting and adjustment
- Favorite position
- Rechargeable built in Li-ion battery
- Switch Wand control
- Universal Mini USB charging port

TECHNOLOGIES

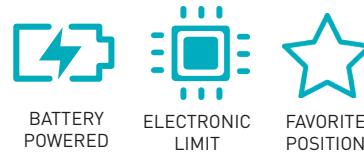

DIMENSIONS

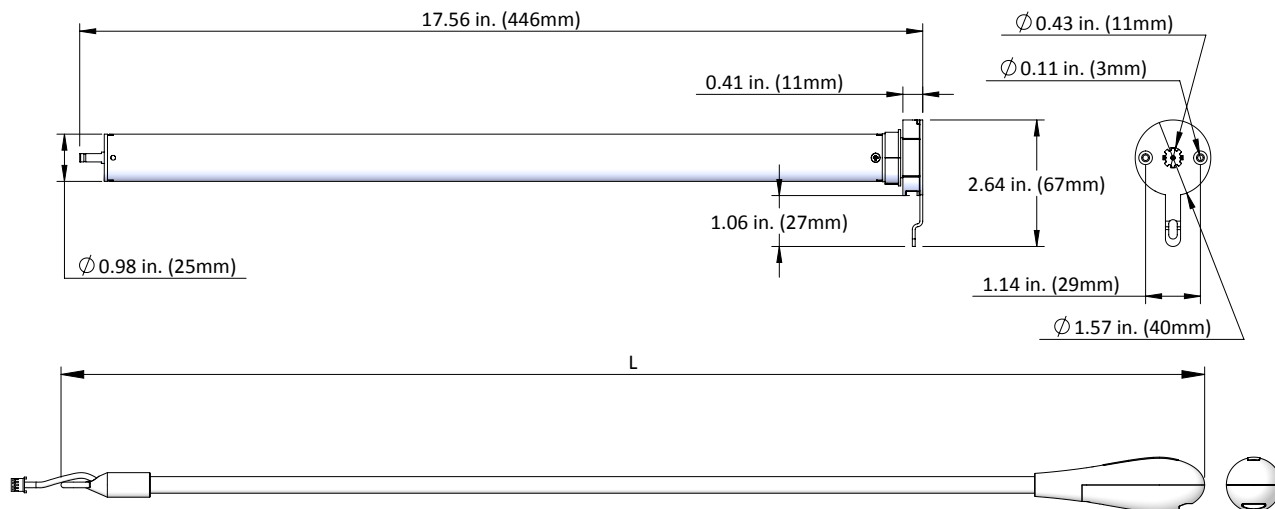

SPECIFICATIONS

Voltage	12 V	Limit Switch Type	Electronic
Torque	1.1 Nm	Amps	0.75 A
Max Run Time	10 min	Battery Size/Type	1400 mAh
Speed	40 RPM	Temp Working Range	32°F to 140°F (0°C to 60°C)
IP Rating	IP44	Insulation Class	III


Leading innovator of precision hardware and automated shade solutions.

USA | AUSTRALIA | EUROPE rolleasemed.com

PQRG_MTDCBSW25-1.1_V1.0 FEB 2017
© 2017 Rollease Acmeda Group



APPLICATIONS



COMPATIBLE SYSTEMS

- Skyline Systems
- R-Series Systems

COMPATIBLE TUBES

- 1.25"
- 1.5"

ACCESSORIES

CHARGING SOLUTIONS	Descr: USB Wall Charger, 5V Part #: MTPS-USB-BK
	Descr: USB Cable, 6" Part #: USBCABLE-6-BK
WANDS	Descr: Wand Assembly for Switch Motor, 24" Part #: MTSW24-W
	Descr: Wand Assembly for Switch Motor, 36" Part #: MTSW36-W
	Descr: Wand Assembly for Switch Motor, 48" Part #: MTSW48-W
CROWN AND DRIVES	Descr: Crown & Drive Set for 25mm motor in 1 1/4" tube Part #: MTCRDR-25-1.25
	Descr Crown and Drive Set 25mm motor to 1 1/2" tube Part #: MTCRDR-25-1.5
BRACKET ADAPTERS	Descr: Motor Adapter 25/28/35mm to SKY 6nm Part #: MTAD-252835-SL
	Descr: Motor Adapter 25/28mm to SKY 12nm v2 White Part #: MTAD-25-28-SLV2W
	Descr: Motor Adapter 25/28/35mm to R-Series 3nm Part #: Motor includes R-series adapter plate
	Descr: M40 H/D Universal Disc Adapter S45 White Part #: RB40-1402-069400



Leading innovator of precision hardware and automated shade solutions.
USA | AUSTRALIA | EUROPE rolleseeacmeda.com

