



Aqua Pro Pump Systems

A Tomiko Inc. Company

Little Sucker Series Stainless Steel Sump Pumps

LS-II 1/3 HP, LS-V 1/2 HP Stainless Sump Pump

FEATURES FOR LS-II & LS-V

- Corrosion resistant. Stainless motor and pump housing with high impact. Noryl impeller
- Piggy back design vertical float for easy replacement and unobstructed operation
- Air filled motor for easy heat dissipation
- 10' power cord for extra reach
- Automatic reset thermal overload for safe operation




LS-II



LS-V

SPECIFICATIONS		
DESCRIPTION	LS II	LS V
Applications	Sump, Dewatering	Sump, Dewatering
Capacities	48 GPM	58 GPM
Shut off Head	25'	31'
Operation Vertical Float		
On	12"	12"
Off	4"	4"
Solids Handling	3/8"	3/8"
Continuous Temp	112F	112F
Motor	1/3 HP, 3.9 FLA, air filled, shaded pole motor 3450 RPM with thermal overload protection	1/2 HP, 5 FLA, air filled, shaded pole motor 3450 RPM with thermal overload protection
Electrical Data	115 volts, 1 phase, 60 HZ	115 volts, 1 phase, 60 HZ
Shaft Seal	Ceramic/Carbon Buna	Ceramic/Carbon Buna
Motor Housing	Stainless Steel	Stainless Steel
Liquid End	Stainless Steel	Stainless Steel
Impeller	Noryl	Noryl
Discharge	1-1/2"	1-1/2"
Power Cord	10' SJT	10' SJT
Dimensions	11.25" X 5.75"	11.25" X 5.75"

PERFORMANCE CURVES

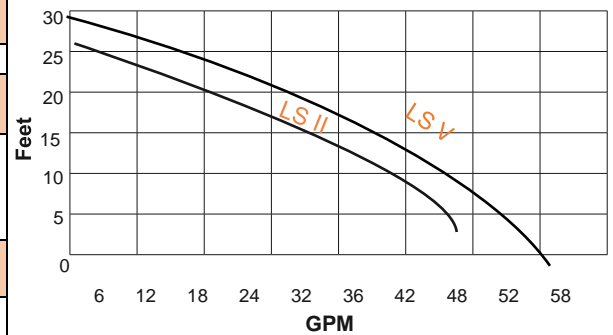

Aqua Pro Pump Systems
a Tomiko Inc. Company

Phone 925.754.5686 Fax 925.754.5691
Email Sales@TomikoInc.com
PO Box 8056, Pittsburg, CA 94565