

# X - Type Plus


This lightning-fast **"high-performance mid-range press"** offers many features from larger MHM presses in a much smaller footprint ...



## FEATURES AND BENEFITS

Tablet main control unit with WIFI connectivity	• Tool-free front/rear stroke length adjustment	•
Self-diagnostic operating system	• Independent squeegee/floodbar angle adjustment	•
Instant technical support via internet	• Squeegee pressure regulator on every station	•
Online software updates	• MHM 'pin-lock' screen holding system	•
Print job memory storage via main control unit	• Adjustable screen holders for various frame sizes*	•
High-speed AC/Servo electric index movement	• Individual off-contact adjustment on all stations	•
Single/Double Index (in both directions)	• Full micro-registration with zero starting position	•
Print start/finish and sample modes	• Aluminium honeycomb pallets	•
Production/batch counter	• Push button super-fast pallet changeover	•
Skip/miss-loaded shirt button	• Flash cure adjustments from main control unit	•
Pre-heat pallets function	• Foot pedal with start/stop/hold functions	•
Powerful AC electric drive print heads	• Safety system (cable)	•
Control keypad on every print station	• Variable speed index control	optional
Individual 'chopper' squeegee system	• Laser positioning guides	optional
Quick release squeegees & floodbars	• Smartphone / PC-app (links to tablet control)	optional
Squeegee arm lift for increased visibility	• U-Clamp screen holders with pneumatic lock	optional
Independent flood/print speed control	• Multiprint function	optional

\*All MHM machines are compatible with both standard and re-tensionable roller frames.

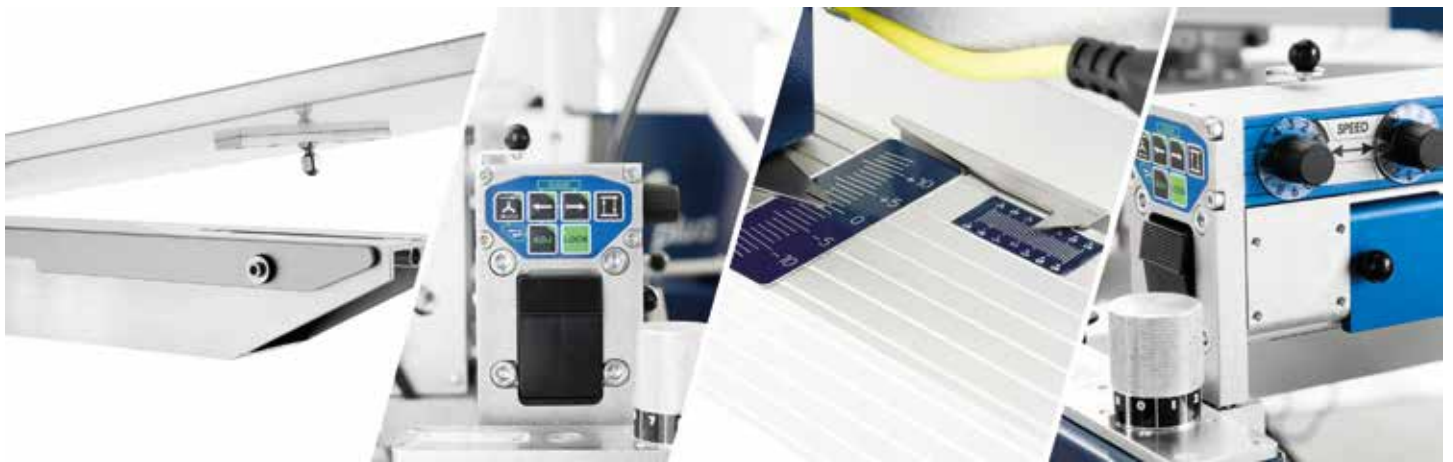

Specifications	SPXC 04	SPXC 08	SPXC 10	SPXC 12	SPXC 14
Number of pallets	4	8	10	12	14
Max. number of print stations	3	6	8	10	12
Max. print area (cm / inch)	43 x 50 cm / 17 x 20"				
Max. diameter (cm / inch)	320 cm / 126"	370 cm / 146"	410 cm / 161,5"	450 cm / 177"	490 cm / 193"
Height of machine (cm / inch)	180 cm / 71"				
Weight of machine (kg / lbs)	950 / 2100	1100 / 2430	1270 / 2800	1690 / 3730	1950 / 4300
Air consumption (l/min)	130	220	280	340	400
Rec. capacity of air supply (l/min)	270	350	400	450	500
Air pressure (minimum)	7 bar / 100 psi (filtered, dry air supply only)				
Drive System	AC inverter indexer motor / electrical squeegee drive				
Electrical supply	1 ph-200 / 240 V, 50 / 60 Hz (+/-5%)				
Electrical requirement (indexer)	1,6 kW				
Electrical requirement (per printstation)	0,4 kW				
Registration accuracy (mm / inch)	+/- 0,02 mm / +/- 0,00078"				
Rec. frame profile (cm / inch)	4 x 4 cm / 1,57 x 1,57"				
Max. frame size (cm / inch)	60 x 84 cm / 23,6 x 33"				
Production capacity (pieces/h)	1200				