

Houston International Specialty Inc.

Size	9.625
Grade	N/L 80
Weight	43.5


TCBC-HT

Coupling and Pipe Dimensions (in)						
	Outer Diameter	Inner Diameter	Coupling Length	Make-up Loss	Wall Thickness	Drift Diameter
Coupling	10.625	9.535				
Pipe		8.755	9.625	4.813	0.435	8.599
Pin		8.755				


Torque Values (ft-lbs)				
Field End Make-Up			Max. Working Torque ¹	Yield Torque
Minimum	Optimum ²	Maximum		
32,500	36,300	41,000	51,000	56,800

Yield Stress (x1000 lbs.)	
Tensile	Compressive
1,005	1,005

Maximum Pressure (psi)	
Internal	External
6,330	3,810

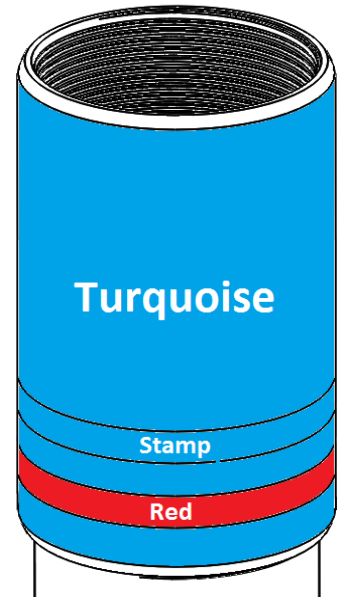

- ¹ Max. Working Torque value is not to be exceeded during operation.
² If Optimum Torque does not meet the Base of Triangle Stamp, M/U to the Base of Triangle.

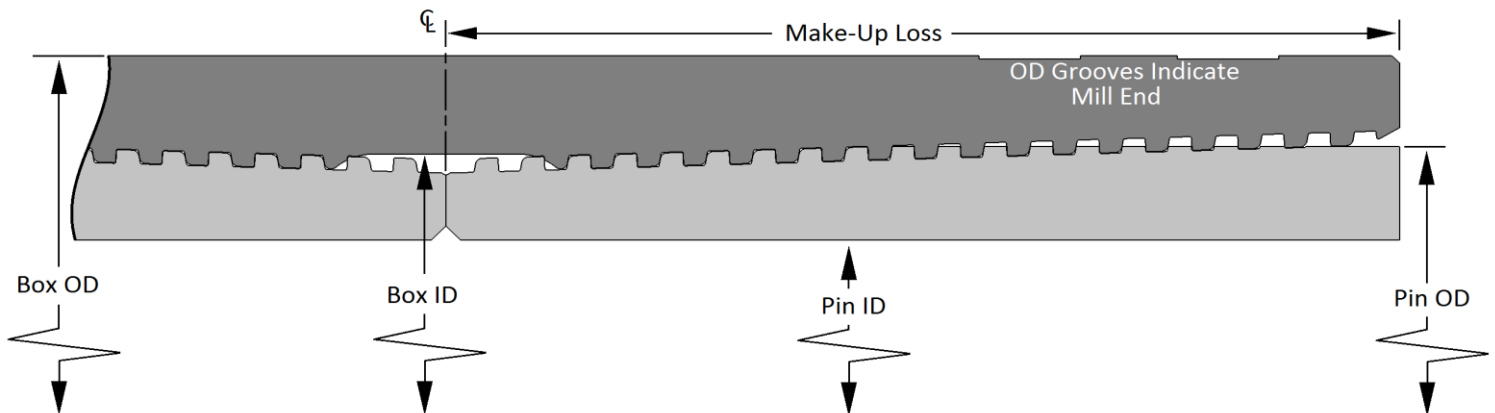

*Data are for information purposes only. Though HIS has made efforts to ensure accuracy, HIS makes no warranty for loss or damage due to its use.

rev 0

19996 Hickory Twig Way Spring, TX 77388
 Phone: (281) 602-7550
 Fax: (281) 602-7557