



2017



CampoEquipment.com

portable power
distribution panels

aQUaBlaze

ECOBlaze

CAMPO EQUIPMENT

6 Carson Court, Brampton, ON, L6T 4P8 1-866-323-0042 www.campoequipment.com



BLAZE 400D TURBO

- ✓ Input BTU/h: 280,000 to 396,000
- ✓ Indirect Oil Fired
- ✓ Beckett Burner (4 Firing Rates)
- ✓ 220 °F + Heat Rise
- ✓ Ductability: 150 ft. (Turbo)
- ✓ Fuel Tank: 42 US Gallons (Optional 70 and 100 US Gallon tank available)
- ✓ Whisper Quiet Operation
- ✓ Air Volume (CFM): 5,500 (Turbo) Up to 3" of Static pressure
- ✓ Recirculating Capabilities
- ✓ Thermostat Operation
- ✓ Genysis Primary Controller
- ✓ Redundant Fail Safe Control System
- ✓ Digital Panel Mounted Voltmeter
- ✓ Oil Pressure Gauge, Spin-off Filter
- ✓ Lifting Bar & Forklift Pockets
- ✓ Weight: 550 lbs.
- ✓ Dimensions: 76.7" x 31" x 57.6"
- ✓ Full Load Amps: 8.5A (Turbo)
- ✓ Power Supply: 120 Volt, 15 A
- ✓ Air Outlets: Two 12" or 1 x 16"
- ✓ Air Inlets: Two 12" or 1 x 16"
- ✓ Stainless Steel Heat Exchanger
- ✓ CSA/UL Approved



Optional 120% spill containment on 42 and 70 Gallon tanks available for 400/600 Series

BLAZE 400G TURBO & BLAZE 600G TURBO I & II

- ✓ Input BTU/h: 399,000 (400G), 575,000 (600GT & 600GTII)
- ✓ Indirect NG/LP
- ✓ Beckett Burner
- ✓ 220 °F + Heat Rise
- ✓ Ductability: 150 ft
- ✓ Whisper Quiet Operation
- ✓ Air Volume (CFM): 5,500 (400G/600G), 6,500 (600GTII)
- ✓ Up to 3" of Static pressure (400G), 4" of Static pressure (600GT & 600GTII)
- ✓ Recirculating Capabilities
- ✓ Thermostat Operation
- ✓ Digital Panel Mounted Voltmeter
- ✓ NG/LP Easy Switchover valve
- ✓ Redundant Fail Safe Control System
- ✓ Lifting Bar
- ✓ Forklift Pockets
- ✓ Weight: 550 lbs (400G) 600lbs (600G/600GTII)
- ✓ Dimensions: 76.7" x 31" x 57.6"
- ✓ Full Load Amps: 8.5 A (400G)/11.5A (600G) 18A (600G TII)
- ✓ Power Supply: 120 Volt, 15 A (400G/600G) 120 Volt, 20 A (600GTII)
- ✓ Air outlets: Two 12" or 1 x 16"
- ✓ Air Inlets: Two 12" or 1 x 16"
- ✓ Stainless Steel Heat Exchanger
- ✓ CSA/UL Approved



BLAZE 600D TURBO I & II

- ✓ Input BTU/h: 588,000
- ✓ Indirect Oil Fired
- ✓ Beckett Burner
- ✓ 240 °F + Heat Rise
- ✓ Ductability: 150 ft. (Turbo)
- ✓ Fuel Tank: 42 US Gallons (Optional 70 and 100 US Gallon tank available)
- ✓ Whisper Quiet Operation
- ✓ Air Volume: 5,500 CFM or 6,500 CFM
- ✓ Up to 4" of Static pressure
- ✓ Recirculating Capabilities
- ✓ Thermostat Operation
- ✓ Genysis Primary Controller
- ✓ Digital Panel Mounted Voltmeter
- ✓ Redundant Fail Safe Control System
- ✓ Oil pressure gauge, Spin-off Filter
- ✓ Lifting Bar
- ✓ Forklift Pockets
- ✓ Weight: 600 lbs.
- ✓ Dimensions: 76.7" X 31" X 57.6"
- ✓ Full Load Amps: 11.5/18
- ✓ Power Supply: 120 Volt, 15 A/20 A
- ✓ Air Outlets: Two 12" or 1 X 16"
- ✓ Air Inlets: Two 12" or 1 X 16"
- ✓ Stainless Steel Heat Exchanger
- ✓ CSA/UL Approved
- ✓ OPTIONAL 70 and 100 US Gallon Tanks for 400/600 Series
- ✓ Optional 120% spill containment on 42 and 70 Gallon tanks



BLAZE 700D/G

- ✓ Input BTU/h: 700,000
- ✓ Oil/Gas Fired
- ✓ Beckett/Riello Burner
- ✓ 3 Fan Speeds up to 10,000 CFM
- ✓ High Static Fan: up to 4" Static Pressure
- ✓ Ducting: up to 200 ft., 1 x 20" duct panels on supply side
- ✓ Full Load Amps: 1PH 16 Amps, 3PH 8.5 AMPS
- ✓ Voltage: 1PH or 3PH/208-240V
- ✓ Weight: 1,200 lbs.
- ✓ Dimensions: 92" x 33.25" x 45"



BLAZE 1000D/G

- ✓ Input BTU/h: 1,000,000
- ✓ Oil/Gas Fired
- ✓ Beckett Burner
- ✓ 3 Fan Speeds up to 13,500 CFM
- ✓ High Static Fan: up to 6.5" Static Pressure
- ✓ Ducting: up to 400 ft., 1 x 24" duct panels on supply and return side
- ✓ Full Load Amps: 1PH 42 Amps, 3PH 25 AMPS
- ✓ Voltage: 1PH or 3PH/208-240V
- ✓ Weight: 2,000 lbs.
- ✓ Dimensions: 111" x 33.25" x 50"



BLAZE 2000D/G

- ✓ Input BTU/h: 2,000,000
- ✓ Oil/Gas Fired, Beckett Burner (High Fire /Low Fire Burner)
- ✓ 3 Fan Speeds up to 16,000 CFM
- ✓ High Static Fan: up to 6.5" Static Pressure
- ✓ Ducting: up to 200 ft. 1 x 24" duct panel on supply and return side
- ✓ Full Load Amps: 1PH 55 Amps, 3PH 32 Amps
- ✓ Voltage: 1PH or 3PH/208-240V
- ✓ Weight: 2950 lbs.
- ✓ Dimensions: 144" x 33.25" x 67"



700/1000/2000 D/G Common Features:

- ✓ Indirect Fired
- ✓ Recirculating Capabilities
- ✓ Tempered Air Mode for LEED Construction allows for lower discharge temperature when remote thermostat is satisfied in order to deliver continuous heat to the jobsite (Standard on Blaze 1000 and 2000, optional on Blaze 700)
- ✓ NG/LP easy switch over valves
- ✓ Gas Pressure Gauges on Manifold and inlet side of train
- ✓ Panel Mount Voltmeter
- ✓ Genisys Display Module (Oil Units) provides critical diagnostic info.
- ✓ Hour meter
- ✓ VFD Eliminates Large in-rush Current for Motor Starts
- ✓ Stackable for off-Season Storage
- ✓ Optional "Plug and Play" burner kit can easily convert unit from diesel to NG or LP
- ✓ Available in 3 fuel options upon ordering: Natural Gas/Propane/Diesel
- ✓ High Efficiency heaters: 88%
- ✓ Able to fit through a 36" door opening
- ✓ Mobile and easy to position around the job site with integrated Fork Lift Pockets and Lifting Eyes
- ✓ Stainless Steel Heat Exchangers
- ✓ Units Feature Extra Large Burner Compartment for ideal service access or simple burner conversion
- ✓ CSA/UL Approved

CAMPO EQUIPMENT

6 Carson Court, Brampton, ON, L6T 4P8 1-866-323-0042 www.campoequipment.com

Fuel Consumption Rates per Model : Blaze 400 Oil 2.82 US GPH, Blaze 400 NG 11.16 US GPH, LP 4.46 US GPH
Blaze 700 Oil 5 US GPH, Blaze 700 NG 19.54 US GPH, LP 7.81 US GPH
Blaze 1000 Oil 7.14 US GPH, Blaze 1000 NG 27.92 US GPH, LP 11.17 US GPH
Blaze 2000 Oil 14.28 US GPH, Blaze 2000 NG 55.84 US GPH, LP 22.34 US GPH



BLAZE CUBE 1200 c/w

150% Containment

- ✓ Input BTU/h: 1,176,000
- ✓ Heated Air Volume: up to 11,000 CFM
- ✓ Ductability: 150 ft.
- ✓ c/w 2 X Blaze 600D TURBO II
- ✓ 7 KW Generator
- ✓ 237 US Gallon Fuel Tank
- ✓ 28 hrs. of Run Time
- ✓ Tandem 3500 lbs. Trailer



BLAZE CUBE 1200

Chinook Series c/w

150% Containment

- ✓ Input BTU/h: 1,176,000
- ✓ Heated Air Volume: up to 11,000 CFM
- ✓ Ductability: 150 ft.
- ✓ c/w 2 X Blaze 600D TURBO II
- ✓ 1800 RPM Generator
- ✓ 237 US Gallon Fuel Tank
- ✓ 28 hrs. of Run Time
- ✓ Tandem 3500 lbs. Trailer
- ✓ Large sump, Positive Air Shut Off, Battery Disconnect, Block Heater



BLAZE CUBE 1000

Arctic Series c/w 150% Containment

- ✓ Input BTU/h: 1,000,000
- ✓ Heated Air Volume: up to 13,500 CFM
- ✓ Ductability: 400 ft.
- ✓ c/w Blaze 1000D
- ✓ 1800 RPM 8 KW Generator
- ✓ 237 US Gallon Fuel Tank
- ✓ 30 hrs. of Run Time
- ✓ Tandem 3500 lbs. Trailer
- ✓ Large sump, Positive Air Shut Off, Battery Disconnect, Block Heater
- ✓ Options: Low fuel Beacon and automatic shut down



BLAZE 600 TURBO Tow Behind

- ✓ 100 US Gallon Fuel Tank, 36 hr. Run Time
- ✓ 2 X Duct Storage Compartments
- ✓ 1 X 3500 lbs. Axle Trailer
- ✓ Optional Double Wall 100 Gallon Tank Available



BLAZE 150E

- ✓ BTU's 512,000 (150 KW)
- ✓ Volts 480/600
- ✓ 14,500 Max CFM
- ✓ 6.5" Static Pressure Capabilities
- ✓ Up to 200 ft. of ducting
- ✓ Available in 600 Volts/3PH and 480V/3PH
- ✓ 480V, full load amps 180
- ✓ 600V, full load amps 167
- ✓ 60/90/150 KW banks, 3 Fan Speeds
- ✓ Max Outlet Temperature = 250°F
- ✓ 68" X 31.5" X 56" 950 lbs.
- ✓ CSA/UL Approved



ELECTRIC HEATERS

BLAZE 1.5E (1.5 KW)
BLAZE 3E (3KW)
BLAZE 6/9E (6/9 KW)
BLAZE 18E (18 KW)
BLAZE 40E (40 KW)
BLAZE 60E (60 KW)
BLAZE 150E (150 KW)



EMPOWERED BY INNOVATIVE ENGINEERING

1.866.323.0042

The Blaze 200 DG Turbo (LP/NG/OIL-FIRED)

**Introducing the most efficient and high performance heater in its class.
85.6% Efficient with Recirculating Capabilities to minimize your fuel costs!**

FEATURES

- Whisper Quiet (SOFT START/NO INRUSH)
- Discharge Temperature up to 290F
- Recirculating Capabilities
- Small footprint with Forklift Pockets & Lifting Bar with 16" tires for easy handling
- Stainless Steel Heat Exchanger
- Powder Coat Finish
- Easy LP/NG Switchover
- Beckett Burner Options for both Oil and Gas
- Redundant Fail Safe Control System
- Oil Pressure Gauge
- Thermostat Operation
- Onboard Burner Diagnostics

SPECIFICATIONS

- 175,000 BTU/h, Consumption: 1.25GPH (Oil), 4.89 GPH (NG), 1.95 GPH (LP)
- 3,250 CFM Highest in its Class
- Ductability: 150 ft., Max 50ft on Return
- 5" of static Pressure, 37db @ 7M
- 120V/15A/60HZ Full Load Amps: 9A
- Dry Weight: 400lbs
- Overall Dimensions: 48.5" X 30.6" X 65"
- 40 US Gallon Fuel Tank (32 hours)
- 12" inlet and outlet CSA/UL Approved





EMPOWERED BY INNOVATIVE ENGINEERING

1.866.323.0042



RECIRCULATING CAPABILITIES



The Blaze 400 and 600 TURBO &
TURBO II
(LP/NG/OIL-FIRED)

GROUND BREAKING FEATURES:

5,500/6,500 CFM Highest in its Class
Ductability: 150 ft.
Whisper Quiet Operation
220 °F Temperature Rise
Recirculating Capabilities
Full Load Amps: 8.5A (400) 11.5 (600) 17 (600 Turbo II)
Forklift Pockets/Lifting Bar

The Blaze 400 & 600 TURBO and TURBO II High Performance Portable Heater



MORE FEATURES:

Digital Panel Mounted
Voltmeter
Multiple Firing Rates
Interchangeable Burners
Stainless Steel Heat
Exchanger
Easy LP/NG Switchover
Beckett Burner Options for both Oil and Gas
Redundant Fail Safe Control System
Oil Pressure Gauge
Thermostat Operation
Genysis Beckett Controller
Optional 70 and 100 Gallon Fuel Tanks
CSA/UL Approved
42 US Gallon Onboard Fuel Tank

DISTRIBUTED BY:



The Blaze 400 & 600 TURBO and TURBO II

Introducing 120% full containment on 400 and 600 models



120% FULL SPILL CONTAINMENT. COMPLETE PROTECTION FOR TANK, BURNER LINES, FILTER AND PUMP. AVAILABLE WITH OUR 42 AND 70 US GALLON FUEL TANKS.



EASY ACCESS TO FILTER, FUEL FILLER AND BURNER AREA





THE BLAZE 700 DG

EMPOWERED BY INNOVATIVE ENGINEERING



Features

- Indirect Fired
- Recirculating Capabilities
 - Input BTU/h: 700,000
 - Oil/Gas Fired
 - Beckett Burner
- 3 Fan Speeds up to 10,000 CFM
- Optional 175 US Gallon Sub-base Tank
 - High Static Fan: up to 4" Static Pressure
- Ducting: up to 200 ft., 1 x 20" duct panels on supply side
- Full Load Amps: 1PH 16 AMPS, 3PH 8.5 AMPS
 - Voltage: 1PH OR 3PH/208-240V
 - Weight: 1,200 lbs.
 - Dimensions: 92"x 33.25"x 45"
 - NG/LP easy switch over valves
- Gas Pressure Gauge on inlet side of train
 - Panel Mount Voltmeter
- Genisys Display Module (Oil Units) provides critical diagnostic information
 - Hour meter
- VFD Eliminates Large in-rush Current for Motor Starts
- Optional "Plug and Play" burner kit can easily convert unit from OIL to NG or LP

High Performance Portable Heating

Efficient, Reliable, Safe & Easy to Service

Upto 10,000 CFM

88% Efficiency

Unique High
Static Fan

Max Static
Pressure 4"



High Performance Portable Heating

Efficient, Reliable, Safe & Easy to Service

THE BLAZE 700 DG



ADDED FEATURES

- ✓ Unique High Static Fan allows recirculation of warm inside air, resulting in fuel savings and even temperatures
- ✓ Able to fit through a 36" door opening
- ✓ Available in three fuel options upon ordering: Natural Gas, Propane, or Diesel
- ✓ Heater is mobile and easy to position around the job site with integrated Fork Lift Pockets and Lifting Eyes
- ✓ The Durable Heat Exchanger and Fire Box are made from 100% Stainless Steel
- ✓ Units Feature Extra Large Burner Compartment for ideal service access or simple burner conversion
- ✓ Stackable for off-Season Storage
- ✓ Units are CSA/UL Approved
- ✓ Ask about how our Heaters can help you with your next LEED construction project

1-866-323-0042
6 CARSON COURT, BRAMPTON ON CAN L6T 4P8
WWW.CAMPOEQUIPMENT.COM





THE BLAZE 1000 DG

EMPOWERED BY INNOVATIVE ENGINEERING



Features

- Indirect Fired
- Recirculating Capabilities
- Input BTU/h: 1,000,000
 - Oil/Gas Fired
 - Beckett Burner
- 3 Fan Speeds up to 13,500 CFM
- Optional 300 US Gallon Sub-base Tank
- High Static Fan: up to 6.5" Static Pressure
- Ducting: up to 400 ft., 1 x 24" duct panels on supply side
- Full Load Amps: 1PH 42 AMPS, 3PH 22 AMPS
- Voltage: 1PH OR 3PH/208-240V
 - Weight: 2,000 lbs.
- Dimensions: 111"x 35.75"x 53"
 - NG/LP easy switch over valves
- Gas Pressure Gauge on inlet side of train
 - Panel Mount Voltmeter
- Genisys Display Module (Oil Units) provides critical diagnostic information
 - Hour meter
- VFD Eliminates Large in-rush Current for Motor Starts
- Optional "Plug and Play" burner kit can easily convert unit from OIL to NG or LP
 - Tempered Air Mode

High Performance Portable Heating

Efficient, Reliable, Safe & Easy to Service

Upto 13,500 CFM

88% Efficiency

Unique High
Static Fan

Max Static
Pressure 6.5"



High Performance Portable Heating Efficient, Reliable, Safe & Easy to Service

THE BLAZE 1000 DG



ADDED FEATURES

- ✓ Unique High Static Fan allows recirculation of warm inside air, resulting in fuel savings and even temperatures
- ✓ Able to fit through a 36" door opening
- ✓ Available in three fuel options upon ordering: Natural Gas, Propane, or Diesel
- ✓ Heater is mobile and easy to position around the job site with integrated Fork Lift Pockets and Lifting Eyes
- ✓ The Durable Heat Exchanger and Fire Box are made from 100% Stainless Steel
- ✓ Units Feature Extra Large Burner Compartment for ideal service access or simple burner conversion
- ✓ Stackable for off-Season Storage
- ✓ Units are CSA/UL Approved
- ✓ Ask about how our Heaters can help you with your next LEED construction project

1-866-323-0042
6 CARSON COURT, BRAMPTON ON CAN L6T 4P8
WWW.CAMPOEQUIPMENT.COM





THE BLAZE 2000 DG

EMPOWERED BY INNOVATIVE ENGINEERING



High Performance Portable Heating

Efficient, Reliable, Safe & Easy to Service

Features

- Indirect Fired
 - Recirculating Capabilities
- Input BTU/h: 1,000,000/2,000,000
 - Oil/Gas Fired
 - Beckett Burner
- 3 Fan Speeds up to 16,000 CFM
- High Static Fan: up to 6.5" Static Pressure
- Ducting: up to 200 ft., 1 x 24" duct panels on supply side
- Full Load Amps: 1PH 55 AMPS, 3PH 32 AMPS
- Voltage: 1PH OR 3PH/208-240V
 - Weight: 2,950 lbs.
- Dimensions: 144"x 35.75"x 66"
 - NG/LP easy switch over valve
- Gas Pressure Gauge on inlet side of train
 - Panel Mount Voltmeter
- Genisys Display Module (Oil Units) provides critical diagnostic information
 - Hour meter
- VFD Eliminates Large in-rush Current for Motor Starts
- Optional "Plug and Play" burner kit can easily convert unit from OIL to NG or LP
 - Tempered Air Mode

Upto 16,500 CFM

88% Efficiency

Unique High
Static Fan

Max Static
Pressure 6.5"



High Performance Portable Heating Efficient, Reliable, Safe & Easy to Service

THE BLAZE 2000 DG



ADDED FEATURES

- ✓ Unique High Static Fan allows recirculation of warm inside air, resulting in fuel savings and even temperatures
- ✓ Able to fit through a 36" door opening
- ✓ Available in three fuel options upon ordering: Natural Gas, Propane, or Diesel
- ✓ Heater is mobile and easy to position around the job site with integrated Fork Lift Pockets and Lifting Eyes

- ✓ The Durable Heat Exchanger and Fire Box are made from 100% Stainless Steel
- ✓ Units Feature Extra Large Burner Compartment for ideal service access or simple burner conversion
- ✓ Stackable for off-Season Storage
- ✓ Units are CSA/UL Approved
- ✓ Ask about how our Heaters can help you with your next LEED construction project

1-866-323-0042
6 CARSON COURT, BRAMPTON ON CAN L6T 4P8
WWW.CAMPOEQUIPMENT.COM



BLAZE CUBE 1200 Chinook Series

HIGH PERFORMANCE PORTABLE HEATING

FEATURES

- ✓ 2 X Blaze 600D Turbo II's (1,176,000 BTU's total)
- ✓ 240F temperature rise
- ✓ 13,000 CFM
- ✓ 150ft ductable
- ✓ Recirculating capabilities
- ✓ 150% spill containment
- ✓ Choice of 4 X 12" or 2 X 16" on supply or return.
- ✓ Tight enclosure designed to harness genset (Kobuta D1005 1800 rpm with stamford end 6.5kw) heat to ensure reliable operation (prevents oil gelling)
- ✓ Positive Air Shut Off
- ✓ Battery Disconnect
- ✓ 1000 hour oil change intervals
- ✓ Block Heater
- ✓ Panel mounted digital volt meters on heaters
- ✓ Fully galvanized heavy duty 2 X 3500lb axle trailer



Efficient, Reliable, Safe & Easy to Service!

CAMPO Equipment

EMPOWERED BY INNOVATIVE ENGINEERING



- ✓ Only self-contained unit in the market with these capabilities
- ✓ Easy to service – all service points accessible
- ✓ 237 Gallon Diesel Tank allows for 28 hours of continuous run time without refueling
- ✓ Fuel tank approved and registered for storage and transport of petroleum products under the CAN/CGSB-43. 146-2002
- ✓ Up to 4" of static per heater
- ✓ Stainless Steel Heat Exchangers
- ✓ 24 Volt System for Thermostat Operation
- ✓ Beckett Burner
- ✓ Optional: Automatic low fuel alert and shut down.



Distributed By:



CAMPO Equipment www.campoequipment.com
Empowered by Innovative Engineering



Blaze 1.5E

ELECTRIC PORTABLE SPACE HEATERS

Features

USED for HEATING, DRYING, AND VENTILATION

- ✓ Integrated Ambient Thermostat from 32°F – 150°F
- ✓ Overheat Protection
- ✓ Durable Powder coated Steel Construction
- ✓ Stackable for Storage
- ✓ Stainless Wrapped Heating Coils
- ✓ Fast, high temperature rise with high CFM fan
- ✓ User-friendly and proven reliability
- ✓ Certified for use in Canada and the United States

Specifications

BTU/Hour	5,100
Watts	1,500
Volts / Amps	120V / 13A
Thermostat	32°F – 150°F
Phase	1PH
Airflow	125 CFM
Weight	13 LBS
L x W x H	10.88" x 8.33" x 12.27"
Power Cord	5"
Plug Type	NEMA 5-15P



CAMPO Equipment www.campoequipment.com
Empowered by Innovative Engineering



Blaze 3E

ELECTRIC PORTABLE SPACE HEATERS

Features

USED for HEATING, DRYING, AND VENTILATION

- ✓ Integrated Ambient Thermostat from 32°F – 150°F
- ✓ Overheat Protection
- ✓ Durable Powder coated Steel Construction
- ✓ Stackable for Storage
- ✓ Stainless Wrapped Heating Coils
- ✓ Fast, high temperature rise with high CFM fan
- ✓ User-friendly and proven reliability
- ✓ Certified for use in Canada and the United States

Specifications

BTU/Hour	10,200
Watts	3,000
Volts / Amps	240/12.5
Thermostat	32°F – 150°F
Phase	1PH
Airflow	300 CFM
Weight	15 LBS
L x W x H	13.13" x 10.8" x 14.64"
Power Cord	3 X 14 AWG
Plug Type	NEMA 6-15P



CAMPO Equipment www.campoequipment.com
Empowered by Innovative Engineering



Blaze 6/9 E

ELECTRIC PORTABLE SPACE HEATERS

Features

USED for HEATING, DRYING, AND VENTILATION

- ✓ Integrated Ambient Thermostat from 32°F – 150°F
- ✓ Overheat Protection
- ✓ Durable Powder coated Steel Construction
- ✓ Stackable for Storage
- ✓ Stainless Wrapped Heating Coils
- ✓ Fast, high temperature rise with high CFM fan
- ✓ User-friendly and proven reliability
- ✓ Certified for use in Canada and the United States

Specifications

BTU/Hour	30,700/20,500
Watts	9,000/6,000
Volts / Amps	240V-36.5A (9kw)/24.5A (6kw)
Thermostat	32°F – 150°F
Phase	1PH
Airflow	550 CFM
Weight	45 LBS
L x W x H	23.5" x 13.5" x 17"
Power Cord	4.9" (8 awg) Plug
Plug Type	NEMA 14-50P



CAMPO Equipment www.campoequipment.com
Empowered by Innovative Engineering



Blaze 18 E

ELECTRIC PORTABLE SPACE HEATERS

Features

USED for HEATING, DRYING, AND VENTILATION

- ✓ Integrated Ambient Thermostat from 32°F – 150°F
- ✓ Overheat Protection
- ✓ Durable Powder coated Steel Construction
- ✓ Stackable for Storage
- ✓ Stainless Wrapped Heating Coils
- ✓ Fast, high temperature rise with high CFM fan
- ✓ User-friendly and proven reliability
- ✓ Certified for use in Canada and the United States

Specifications

BTU/Hour	65,000/21,666 X 3
Watts	18,000/6,000 X 3
Volts / Amps	208/240V 1PH 86A, 3PH 50A
Thermostat	32°F – 150°F
Phase	1PH OR 3PH
Airflow	1200 CFM
Weight	80 LBS
L x W x H	35.5" x 17.5" x 20"



THE BLAZE 40 & 60E

Empowered by Innovative engineering



	240V/480V	600V
60KW	144/72AMPS	58 AMPS
40KW	96/48AMPS	39 AMPS
20KW	48/24AMPS	19.5 AMPS

FEATURES

- ✓ Up to 4,500 CFM, 3" of Static Pressure allows for up to 50 feet of ducting overall with max of 12 feet on return.
- ✓ Recirculating Capabilities
- ✓ Indicator lamps for Power On. Remote thermostat capabilities. Fan manual override.
- ✓ Digital Temperature Controller. Able to set discharge temperature
- ✓ 51.5" X 22" X 35.5" 300lbs
- ✓ Blaze 40E (20/40kw)
Blaze 60E (40/60kw)

480/240V easy
switchover toggle
switch feature

Available in 600 Volts/3PH and
480V/240V/3PH

HEAT SETTING	BTU/Hr.	CFM
60kW	205,000	4,500
40kW	136,500	4,500
20kW	68,250	4,500

Max Outlet Temperature=290° F

High Performance Portable Heating

Efficient, Reliable, Safe & Easy to Service

Added Features

- ✓ Operates at extremely low noise levels
- ✓ Unique High Static Fan allows recirculation of warm inside air, resulting in even temperatures and energy savings
- ✓ Durable Heating Element designed for the most demanding environments
- ✓ Ask about how our Heaters can help you with your next LEED construction project
- ✓ Forklift pockets, and removable casters for easy lifting and placement
- ✓ Rugged, weatherproof enclosures for reliable operation outdoors
- ✓ Stackable for off-Season Storage
- ✓ Clean electric heat, free from the moisture and fumes associated with other types of heat
- ✓ Certified for use in the U.S. and Canada



1-866-323-0042

6 CARSON COURT, BRAMPTON ON CAN L6T 4P8
WWW.CAMPOEQUIPMENT.COM



THE BLAZE 150

Empowered by Innovative engineering



FEATURES

- ✓ Up to 14,500 CFM, 6.5" of Static Pressure allows for up to 200 feet of ducting
- ✓ 68" X 31.5" X 56" 950lbs
Able to fit through a 36" door opening
- ✓ Emergency shutdown button plus indicator lamps for Power On, Heat On, and Over Temperature. Ammeters for all 3 stages and Digital Temperature controller with remote thermostat capabilities. Fan manual over-ride and Tempered Air Mode optional.
- ✓ 60kw = 6,650 CFM
90kw = 13,100 CFM
150kw = 14,500 CFM

Available in 600 Volts/3PH and 480V/3PH
Max Outlet Temperature=250°F

High Performance Portable Heating
Efficient, Reliable, Safe & Easy to Service

Added Features

- ✓ Operates at extremely low noise levels
- ✓ Unique High Static Fan allows recirculation of warm inside air, resulting in even temperatures and energy savings
- ✓ Durable Heating Element designed for the most demanding environments
- ✓ Ask about how our Heaters can help you with your next LEED construction project
- ✓ Forklift pockets, eye hooks and removable casters for easy lifting and placement
- ✓ Rugged, weatherproof enclosures for reliable operation outdoors
- ✓ Stackable for off-Season Storage
- ✓ Clean electric heat, free from the moisture and fumes associated with other types of heat
- ✓ Certified for use in the U.S. and Canada



1-866-323-0042

6 CARSON COURT, BRAMPTON ON CAN L6T 4P8
WWW.CAMPOEQUIPMENT.COM





Temporary Portable Power Distribution Centers

Standard Features:

Heavy Duty Industrial Grade Powder Coated Steel Frames c/w lockable swivel castors, forklift pockets on all sides and lifting eye hooks.

All Devices Rated For Outdoor NEMA 3R

Main Fused Disconnect Switch NEMA 3R

Dual Voltage (480/600V – 120/208V) NEMA 3R Transformers *No De-Rating

Custom Made NEMA 3R Load Center with Breakers

GFI 20A 120V Receptacles with Power On LED and PVC Waterproof Covers

30A 250V T.L. Receptacles c/w PVC Waterproof Covers

50A 250V T.L. CS6369 Receptacle c/w PVC Waterproof Covers

Custom Configurations and sizes available built to customer specifications.

Other options include: Cam Locks, Welding Receptacles, Working Lights, Remote Pony Panels etc.

TDP45KVA

- (1) 60A 600V Fused Switch 3R
- (1) 45KVA 480/600V – 120/208V 3R
- (1) 225A 120/208V 30CCT Load Center
- (12) 20A 1P Breakers
- (3) 30A 2P Breakers
- (1) 50A 2P Breakers
- (12) 20A, 120V GFI Receptacles
- (3) 30A 250V T.L. 2P Receptacles
- (1) 50A 250V CS6369 T.L. Receptacle
- All Receptacles with PVC waterproof covers.
- K.O.s for future expansion

TDP75KV

- (1) 100A Fused Switch 3R
- (1) 75KVA 480/600V-120/208V 3PH 4W XTMR 3R
- (1) 225A 120/208V 42 CCT Load Center
- (1) 200A 3P Main Breaker
- (16) 20A 1P Breakers
- (4) 30A 2P Breakers
- (2) 50A 2P Breakers
- (16) 20A 120V GFI Receptacles
- (4) 30A 250V T.L. 2P Receptacles
- (2) 50A 250V CS6369 T.L. Receptacles
- All Receptacles with PVC waterproof covers.
- K.O.s for future expansion



CAMPO Equipment www.campoequipment.com
Empowered by Innovative Engineering

BREAKER PANEL AND RECEPTACLES FOR GENERATOR C/W. (Custom configurations available)

1 - 125A 120/240V 1ph 3W RAIN TIGHT BREAKER PANEL

4 - 20A 120V GFI RECEPTACLES

3 - 20A 250V T.L. RECEPTACLES

1 - 30A 250V T.L. RECEPTACLES

5mts. - 2/4c CABLE



GENERATORS WITH TRANSFORMER C/W. (Custom configurations available)

1 - 150KVA 480/600V 3ph. AUTOTRANSFORMER NEMA 3R (RAIN TIGHT)

1 - 200A 3P SPLITTER BOX

5mts - 2/0 TECK CABLE

1.866.323.0042 6 Carson Court, Brampton, ON, L6T 4P8 www.campoequipment.com

aQuablaze.ca

AB4040DGF ULTRA SERIES

Direct Drive Gasoline Powered Fuel Oil Heated



WET SANDBLASTING KIT INCLUDED
MANY MORE ACCESSORIES AVAILABLE

GO TO www.aQuablaze.ca
AND WATCH VIDEO DEMONSTRATIONS OF AN AQUABLAZE IN USE

DISTRIBUTED BY:

6 Carson Court, Brampton,
Ontario, Canada L6T 4P8

1-866-323-0042

For more information on all of our products please visit us at www.aQuablaze.ca



- 4,000 PSI @ 3.8 GPM POWERED BY HONDA GX390 13HP WITH LOW OIL ALERT SYSTEM AND ELECTRIC START
- 350,000 BTU BECKETT DIESEL-FIRED BURNER
- AQUABLAZE SCHEDULE 80 HEATING COIL C/W DURABLE RUST RESISTANT STAINLESS STEEL SKIN
- HIGH QUALITY INDUSTRIAL PUMP: A.R. NORTH AMERICA SXMV TRIPLEX PLUNGER PUMP, WITH SOLID CERAMIC PLUNGERS, ANODIZED, DIE-CAST ALUMINUM CRANKCASE, STAINLESS STEEL CHECK VALVES, BUNA-TEXTILE V-PACKINGS AND HIGH STRENGTH STAINLESS STEEL PLUNGER RODS, LARGE COOLING FINS AND ANODIZED FOR MAXIMUM HEAT DISSIPATION FOR LONG-TERM USE
- LARGE FUEL OIL TANK: HOLDS UP TO 6 GALLONS OF NO. 1 OR NO.2 FUEL OIL
- LARGE BURNER TEMPERATURE DIAL: ADJUST YOUR WATER TEMPERATURE WITH EASE
- EASILY ADJUSTABLE PRESSURE CONTROL KNOB UP TO 4,000 PSI
- PRESSURE GAUGE INCLUDED
- HEAVY DUTY STEEL FRAME: INCLUDES PROTECTIVE ROLL CAGE AND POWDER COATED FINISH
- PNEUMATIC TIRES: C/W BALL BEARING CONSTRUCTION WITH A STEEL RIM AND GREASING NIPPLES
- 50FT NON MARKING HIGH PRESSURE STEEL BRAIDED HOSE
- QUICK CONNECT HOSE CONNECTORS: FOR EASY ON/OFF CONNECTIONS AND TANGLE FREE HOSES
- QUALITY STAINLESS STEEL DUAL LANCE AND GUN: C/W HIGH PRESSURE QUICK CONNECT FOR NOZZLES AND SEPARATE CHEMICAL AND SOAP NOZZLE
- QUICK DISCONNECT NOZZLES: 0 RED, 15 YELLOW, 25 GREEN, 40 WHITE
- ADJUSTABLE CHEMICAL INJECTOR FOR LOW PRESSURE SOAP AND CHEMICAL INJECTION: C/W CHEMICAL FILTER HOSE WITH CHECK VALVE SOAP ASSEMBLY

aQuablaze.ca

AB270MCU

The AB270MCU tandem axle trailer, with the AB4040DGF 4,000 PSI Ultra Series Portable Hot Water Pressure Washer, is a fully integrated self-contained pressure washing system. The 270 Gallon water tank provides ample cleaning power to sustain most remote-cleaning requirements. The heavy duty drop-axle suspension provides the smoothest ride available and prevents damage to the pressure washer from a harsh ride. The enhanced wheel travel (up to 300% over conventional trailers) keeps road vibration and rattle to a minimum. Long life, rugged, durable and dependable service is what has been engineered into the AB270MCU.

Trailer Mounted Hot Water Pressure Washer



For more information on all of our products and to watch video demonstrations of an aQuablaze in use, please visit us at www.aQuablaze.ca

Features of AB270MCU

(Trailer is legal in any part of the United States or Canada):

AB4040DGF 4,000 PSI Ultra Series Portable Hot Water Pressure Washer or any other aQuablaze hot water pressure washer of your choice.

(CUSTOM CONFIGURATIONS AVAILABLE FOR SPECIFIC PSI AND GPM REQUIREMENTS)

270 Gallon Water Tank, Seamless Polyethylene, 8" lid; Garden Hose Fill Fitting

6 Gallon Chemical and Soap Tank

200ft Garden Hose Reel with 50ft of garden hose

75ft High Pressure hose Reel with 50ft of high pressure hose.

(2) Directional Flood Lamps

Beacon Light

4 pneumatic wheels for AB4040DGF (AB4040DGF may also be removed from AB270MCU and used separately)

The AB270MCU Tandem Axle Trailer and AB4040DGF are powder coated to ensure long term durability in the most adverse working conditions

GVWR 7000lb

Size 4 x 10

Coupler: 2 5/16" c/w breakaway kit

Jack: 2,000 lb post

Safety Chains: (2) 5/16" grade 70 c/w hooks

Axles: (2) 3,500 lb c/w drop axles & EZ lube hubs

Brakes: 10 x 2 Electric-Both axles or surge

Fenders: 12 GA checker plate

Frame: 5" structural steel channel

Wheels: ST205/75/D14 (6 ply) 5 bolt white spoke (1760 lb capacity)

Lights: DOT - sealed beam

Electrical plug: 7 way round

5 year limited warranty

Options: Up to 300ft of 3/8" high pressure hose and reel

Up to 200ft of garden hose

Wet sandblasting kit

Increase continual running time with onboard larger capacity gas and diesel tanks



aQuablaze

AB4037DDF ULTRA SERIES

Direct Drive Diesel Powered Fuel Oil Heated



OPTIONAL WET SANDBLASTING KIT AVAILABLE
MANY MORE ACCESSORIES AVAILABLE

DISTRIBUTED BY:

6 Carson Court, Brampton,
Ontario, Canada L6T 4P8

1-866-323-0042

For more information on all of our products please visit us at



- 3,700 PSI @ 4 GPM POWERED BY YANMAR L100V WITH LOW OIL ALERT SYSTEM AND ELECTRIC START
- 350,000 BTU BECKETT DIESEL-FIRED BURNER
- AQUABLAZE SCHEDULE 80 HEATING COIL C/W DURABLE RUST RESISTANT STAINLESS STEEL SKIN
- HIGH QUALITY INDUSTRIAL PUMP: A.R. NORTH AMERICA RK SERIES TRIPLEX PLUNGER PUMP, WITH SOLID CERAMIC PLUNGERS, ANODIZED, DIE-CAST ALUMINUM CRANKCASE, STAINLESS STEEL CHECK VALVES, BUNA-TEXTILE V-PACKINGS AND HIGH STRENGTH STAINLESS STEEL PLUNGER RODS, LARGE COOLING FINS AND ANODIZED FOR MAXIMUM HEAT DISSIPATION FOR LONG-TERM USE
- LARGE FUEL OIL TANK: HOLDS UP TO 6 GALLONS OF NO. 1 OR NO.2 FUEL OIL
- LARGE BURNER TEMPERATURE DIAL: ADJUST YOUR WATER TEMPERATURE WITH EASE
- EASILY ADJUSTABLE PRESSURE CONTROL KNOB UP TO 3,700 PSI
- PRESSURE GAUGE INCLUDED
- HEAVY DUTY STEEL FRAME: INCLUDES PROTECTIVE ROLL CAGE AND POWDER COATED FINISH
- PNEUMATIC TIRES: C/W BALL BEARING CONSTRUCTION WITH A STEEL RIM AND GREASING NIPPLES
- 50FT NON MARKING HIGH PRESSURE STEEL BRAIDED HOSE
- QUICK CONNECT HOSE CONNECTORS: FOR EASY ON/OFF CONNECTIONS AND TANGLE FREE HOSES
- QUALITY STAINLESS STEEL DUAL LANCE AND GUN: C/W HIGH PRESSURE QUICK CONNECT FOR NOZZLES AND SEPARATE CHEMICAL AND SOAP NOZZLE
- QUICK DISCONNECT NOZZLES: 0 RED, 15 YELLOW, 25 GREEN, 40 WHITE
- ADJUSTABLE CHEMICAL INJECTOR FOR LOW PRESSURE SOAP AND CHEMICAL INJECTION: C/W CHEMICAL FILTER HOSE WITH CHECK VALVE SOAP ASSEMBLY




WWW.CAMPOEQUIPMENT.COM



CONTACT US

1-866-323-0042

MADE IN CANADA 

OUR INTENT IS TO PROVIDE THE BEST PRODUCT POSSIBLE



**DIESEL DRIVEN/OIL FIRED (12V)
AB HEAVY DUTY SERIES - RK SERIES PUMPS**

HP	FLOW/PSI	MODEL	ENGINE
10	4@3700	AB4037DDF-HD	Yanmar L100-V
10	4@3700	AB4037GBDF-HD	Yanmar L100-V (Gearboxed)

Standard features: 250 F adjustable thermostat, 50 feet of hose, nozzles, & lance gun assembly



GAS DRIVEN/OIL-FIRED (120V)

HP	FLOW/PSI	MODEL	ENGINE
5	2.5@2500	AB2525DGF	HONDA
6.5	3@2500	AB3025DGF	HONDA
13	4@4000	AB4040DGF	HONDA

Standard features: 250 F adjustable thermostat, 50 feet of hose, nozzles, & lance gun assembly



ELECTRIC DRIVEN/OIL FIRED

From 3 to 9 GPM's @ 1300 to 3600 PSI
5 to 15 HP
1 PH/3 PH
220/480/600 Volts
Gun Activated

Standard features: 250 F adjustable thermostat, 50 feet of hose, nozzles, & lance gun assembly



GAS DRIVEN/COLD WATER - DIRECT DRIVE/GEAR BOXED

2.5 GPM @ 2500 PSI 5.0 HP
3 GPM @ 2000 PSI 5.0 HP
3 GPM @ 2500 PSI 6.5 HP
3 GPM @ 3000 PSI 9 HP
4 GPM @ 3000 PSI 11 HP
4 GPM @ 4000 PSI 13 HP
4 GPM @ 4000 PSI 13 HP

GO TO www.aQuablaze.ca
AND WATCH VIDEO DEMONSTRATIONS OF AN AQUABLAZE IN USE

6 Carson Court, Brampton,
Ontario, Canada L6T 4P8

1-866-323-0042


DISTRIBUTED BY:

For more information on all of our products please visit us at
www.aQuablaze.ca



CONTACT US

1-866-323-0042

MADE IN CANADA 

OUR INTENT IS TO PROVIDE THE BEST PRODUCT POSSIBLE



GAS DRIVEN/OIL FIRED (12V)

AB MINI BLAZE

FLOW/PSI - 2.7@2700

HP	FLOW/PSI	MODEL	ENGINE
7	2.7@2700	AB2727DGF	SUBARU

Standard features: 250 F adjustable thermostat, 50 feet of hose, nozzles, & lance gun assembly



GAS DRIVEN/OIL FIRED (12V) AB ULTRA SERIES - SXMV SERIES PUMPS

AB HEAVY-DUTY SERIES - RK SERIES PUMPS/OPTIONAL GEARBOX

HP	FLOW/PSI	MODEL	ENGINE
9	3@3200	AB3032DGF	SUBARU
11	4@3000	AB4030DGF	HONDA
11	3.5@3500	AB3535DGF	HONDA
13	3.5@4000	AB3540DGF	HONDA
13	4.0@4000	AB4040DGF	HONDA

Standard features: 250 F adjustable thermostat, 50 feet of hose, nozzles, & lance gun assembly



GAS DRIVEN/OIL FIRED/GEAR BOXED (12V)

AB BULLET PROOF SERIES - XW SERIES PUMPS

HP	FLOW/PSI	MODEL	ENGINE
16	4@4000	AB4040GBGF-BP	B&S
18	5.5@3500	AB5535GBGF-BP	B&S
18	5@4000	AB5040GBGF-BP	B&S
22.5	5.5@4000	AB5540GBGF-BP	B&S
25.5	7@4000	AB7040GBGF-BP	B&S
22.5	4@5000	AB4050GBGF-BP	B&S
30	5.5@5000	AB5550GBGF-BP	B&S

Standard features: 250 F adjustable thermostat, 50 feet of hose, nozzles, & lance gun assembly



AB330MCU TRAILER MOUNTED HOT WATER PRESSURE WASHER

C/W 3.8 GPM @ 4000 PSI, 330 GALLON WATER TANK, HOSE REELS, BYPASS LINE, 250F ADJUSTABLE THERMOSTAT, HEAVY DUTY 7000LB GVWR TRAILER

Many options available, contact your nearest aQuablaze dealer for more info.

Note: can be fitted with any AB series hot water pressure washer

AQUABLAZE ALSO MANUFACTURES CUSTOM TRAILER MOUNTED UNITS AS PER CUSTOMER SPECIFICATIONS


GO TO www.aQuablaze.ca
AND WATCH VIDEO DEMONSTRATIONS OF AN AQUABLAZE IN USE

6 Carson Court, Brampton,
Ontario, Canada L6T 4P8

1-866-323-0042

DISTRIBUTED BY:

For more information on all of our products please visit us at
www.aQuablaze.ca

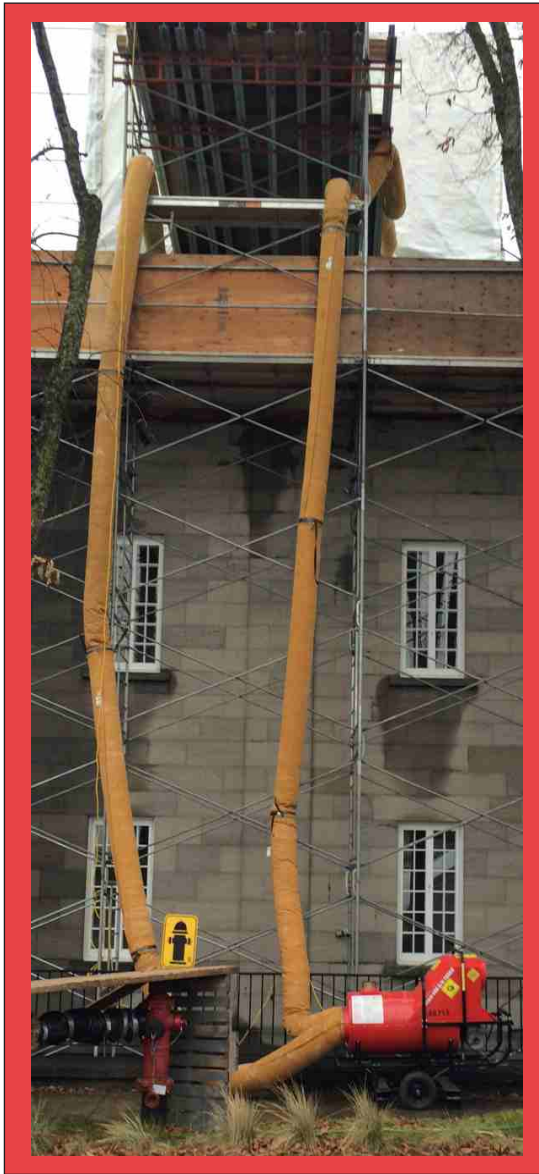

6 Carson Crt.
Brampton, Ontario
Canada L6T 4P8

1.866.323.0042

CampoEquipment.com