


---

# **GAM RUN 16-025 MAG: MODELED AVAILABLE GROUNDWATER FOR THE GULF COAST AQUIFER SYSTEM IN GROUNDWATER MANAGEMENT AREA 15**

Rohit Raj Goswami, Ph.D., P.E.  
Texas Water Development Board  
Groundwater Division  
Groundwater Availability Modeling Section  
(512) 463-0495  
March 22, 2017



*R. Goswami*  
3/22/2017

*This page is intentionally left blank.*

---

# **GAM RUN 16-025 MAG: MODELED AVAILABLE GROUNDWATER FOR THE GULF COAST AQUIFER SYSTEM IN GROUNDWATER MANAGEMENT AREA 15**

Rohit Raj Goswami, Ph.D., P.E.  
Texas Water Development Board  
Groundwater Division  
Groundwater Availability Modeling Section  
(512) 463-0495  
March 22, 2017

## ***EXECUTIVE SUMMARY:***

The modeled available groundwater for Groundwater Management Area 15 for the Gulf Coast Aquifer System is summarized by decade for the groundwater conservation districts (Table 1) and for use in the regional water planning process (Table 2). The modeled available groundwater estimates range from approximately 515,000 acre-feet per year in 2020 to approximately 518,000 acre-feet per year in 2069 (Table 1). The estimates were extracted from results of a model run using the groundwater availability model for the central part of the Gulf Coast Aquifer System (version 1.01). The model run files, which meet the desired future conditions adopted by district representatives of Groundwater Management Area 15, were submitted to the Texas Water Development Board (TWDB) on June 28, 2016, as part of the Desired Future Conditions Explanatory Report for Groundwater Management Area 15. The explanatory report and other materials submitted to the Texas Water Development Board (TWDB) were determined to be administratively complete on October 20, 2016.

## ***REQUESTOR:***

Mr. Tim Andruss, chair of Groundwater Management Area 15.

## ***DESCRIPTION OF REQUEST:***

In a letter dated June 23, 2016, Mr. Tim Andruss provided the TWDB with the desired future conditions of the Gulf Coast Aquifer System adopted by the groundwater conservation districts in Groundwater Management Area 15. The Gulf Coast Aquifer System includes the Chicot Aquifer, Evangeline Aquifer, Burkeville Confining Unit and the Jasper Aquifer (including parts of the Catahoula Formation). TWDB staff worked with INTERA Incorporated, the consultant for Groundwater Management Area 15, in reviewing

model files associated with the desired future conditions. We received clarification from INTERA Incorporated, on behalf of Groundwater Management Area 15, on September 18, 2016, concerning assumptions on variances of average drawdown values per county to model results, which was  $\pm 3.5$  feet for nearly all areas within the Groundwater Management Area 15. The exception is Goliad County which has a variance in drawdown of  $\pm 5$  feet. The desired future conditions for the Gulf Coast Aquifer System, as described in Resolution No. 2016-01 and adopted April 29, 2016, by the groundwater conservation districts within Groundwater Management Area 15, are described below:

**Groundwater Management Area 15 [all counties]**

Drawdown of the Gulf Coast Aquifer System shall not exceed an average of 13 feet in December 2069 from estimated year 2000 conditions.

**Aransas County**

Drawdown of the Gulf Coast Aquifer System shall not exceed an average of 0 feet in December 2069 from estimated year 2000 conditions.

**Bee County**

Drawdown of the Gulf Coast Aquifer System shall not exceed an average of 7 feet in December 2069 from estimated year 2000 conditions.

**Calhoun County**

Drawdown of the Gulf Coast Aquifer System shall not exceed an average of 5 feet in December 2069 from estimated year 2000 conditions.

**Colorado County**

Drawdown shall not exceed an average of 17 feet in Chicot and Evangeline Aquifers and 23 feet in the Jasper Aquifer in December 2069 from estimated year 2000 conditions.

**DeWitt County**

Drawdown of the Gulf Coast Aquifer System shall not exceed an average of 17 feet in December 2069 from estimated year 2000 conditions.



**Fayette County**

Drawdown of the Gulf Coast Aquifer System shall not exceed an average of 16 feet in December 2069 from estimated year 2000 conditions.

**Goliad County**

Drawdown of the Gulf Coast Aquifer System shall not exceed an average of 10 feet in December 2069 from estimated year 2000 conditions.

**Jackson County**

Drawdown of the Gulf Coast Aquifer System shall not exceed an average of 15 feet in December 2069 from estimated year 2000 conditions.

**Karnes County**

Drawdown of the Gulf Coast Aquifer System shall not exceed an average of 22 feet in December 2069 from estimated year 2000 conditions.

**Lavaca County**

Drawdown of the Gulf Coast Aquifer System shall not exceed an average of 18 feet in December 2069 from estimated year 2000 conditions.

**Matagorda County**

Drawdown shall not exceed an average of 11 feet in Chicot and Evangeline Aquifers in December 2069 from estimated year 2000 conditions.

**Refugio County**

Drawdown of the Gulf Coast Aquifer System shall not exceed an average of 5 feet in December 2069 from estimated year 2000 conditions.

**Victoria County**

Drawdown of the Gulf Coast Aquifer System shall not exceed an average of 5 feet in December 2069 from estimated year 2000 conditions.

**Wharton County**

Drawdown shall not exceed an average of 15 feet in Chicot and Evangeline Aquifers in December 2069 from estimated year 2000 conditions.

Based on the adopted desired future conditions, TWDB has estimated the modeled available groundwater for the Gulf Coast Aquifer System in Groundwater Management Area 15.

### **METHODS:**

The groundwater availability model for the central part of the Gulf Coast Aquifer System (Figure 1) was run using the model files submitted with the explanatory report (GMA 15 and others, 2016). Model-calculated water levels were extracted for the year 2000 and the end of the year 2069, and drawdown was calculated as the difference between water levels at the beginning of 2000 and water levels at the end of 2069. Drawdown averages were calculated for each county by aquifer and for the entire Groundwater Management Area 15 by aquifer. As specified in the explanatory report (GMA 15 and others, 2016), drawdown for cells which became dry during the simulation (water level dropped below the base of the cell) were excluded from the averaging. The calculated drawdown averages were compared with the desired future conditions to verify that the pumping scenario achieved the desired future conditions within one foot.

The modeled available groundwater values were determined by extracting pumping rates by decade from the model results using ZONEBUDGET Version 3.01 (Harbaugh, 2009). Annual pumping rates are presented by county and groundwater conservation district, subtotaled by groundwater conservation district, and then summed by Groundwater Management Area 15 (Figure 2 and Table 1). Annual pumping rates are also presented by county, river basin, and regional water planning area within Groundwater Management Area 15 (Figure 2 and Table 2).

### **Modeled Available Groundwater and Permitting**

As defined in Chapter 36 of the Texas Water Code, "modeled available groundwater" is the estimated average amount of water that may be produced annually to achieve a desired future condition. Groundwater conservation districts are required to consider modeled available groundwater, along with several other factors, when issuing permits in order to manage groundwater production to achieve the desired future condition(s). The other factors districts must consider include annual precipitation and production patterns, the estimated amount of pumping exempt from permitting, existing permits, and a reasonable estimate of actual groundwater production under existing permits.


### **PARAMETERS AND ASSUMPTIONS:**

The parameters and assumptions for the groundwater availability are described below:


- Version 1.01 of the groundwater availability model for the central portion of the Gulf Coast Aquifer System was used for this analysis. See Chowdhury and others (2004) and Waterstone and others (2003) for assumptions and limitations of the model.
- The model has four layers which represent the Chicot Aquifer (Layer 1), the Evangeline Aquifer (Layer 2), the Burkeville Confining Unit (Layer 3), and the Jasper Aquifer and parts of the Catahoula Formation in direct hydrologic communication with the Jasper Aquifer (Layer 4).
- The model was run with MODFLOW-96 (Harbaugh and others, 1996).
- Drawdown averages and modeled available groundwater values are based on the extent of the model area rather than official aquifer boundaries (Figures 1 and 2).
- Drawdown for cells with water levels below the base elevation of the cell ("dry" cells) were excluded from the averaging per emails exchanged with INTERA, Inc. dated October 21, 2015.
- Estimates of modeled available groundwater from the model simulation were rounded to whole numbers.
- A model drawdown tolerance of up to 5 feet was assumed for Goliad County and up to 3.5 feet for the rest of Groundwater Management Area 15 when comparing desired future conditions (average drawdown values per county) to model drawdown results.
- Average drawdown by county may include some model cells that represent portions of surface water such as bays, reservoirs, and the Gulf of Mexico.

### **RESULTS:**

The modeled available groundwater for the Gulf Coast Aquifer System that achieves the desired future conditions adopted by Groundwater Management Area 15 increases from approximately 515,000 acre-feet per year in 2020 to approximately 518,000 acre-feet per year in 2069 (Table 1). The modeled available groundwater is summarized by groundwater conservation district and county (Table 1). The modeled available groundwater has also been summarized by county, river basin, and regional water planning area for use in the regional water planning process (Table 2). Small differences of values between table summaries are due to rounding.

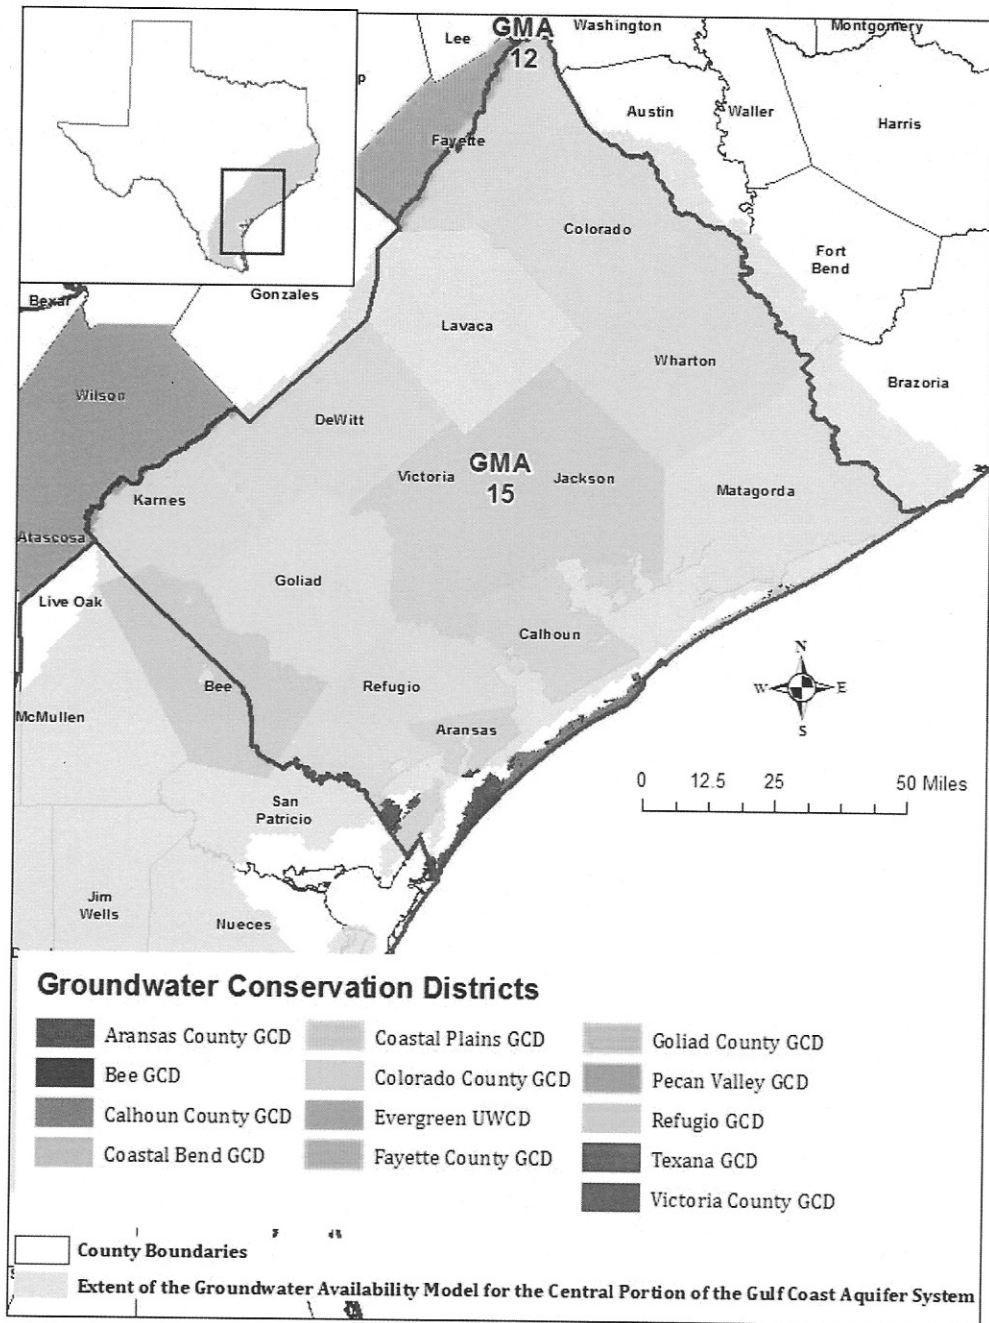

**FIGURE 1. MAP SHOWING GROUNDWATER CONSERVATION DISTRICTS (GCDs) AND COUNTIES IN GROUNDWATER MANAGEMENT AREA 15 OVERLAIN ON THE EXTENT OF THE GROUNDWATER AVAILABILITY MODEL FOR THE CENTRAL PORTION OF THE GULF COAST AQUIFER SYSTEM.**

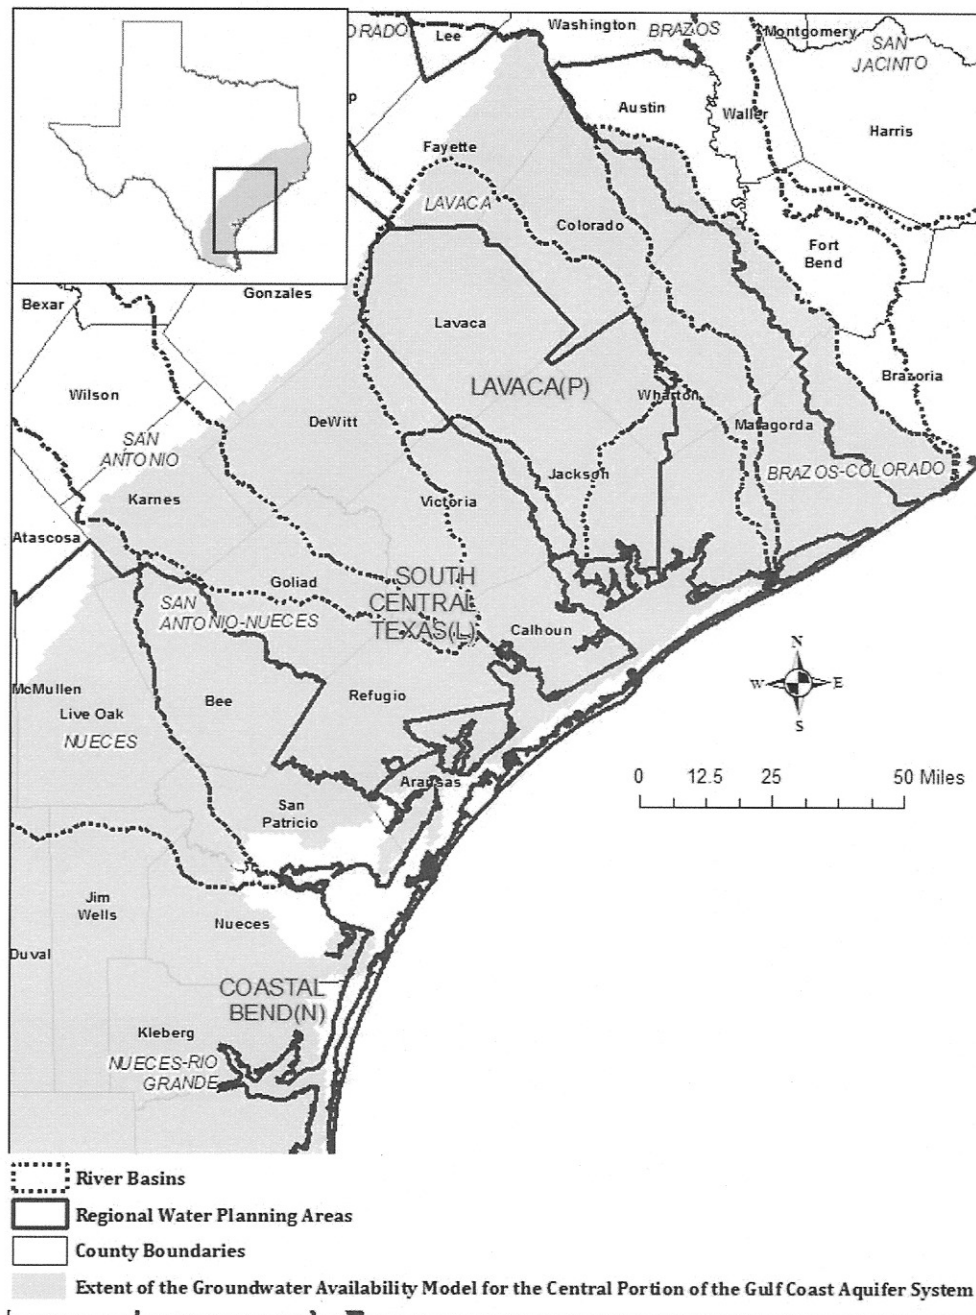

**FIGURE 2. MAP SHOWING REGIONAL WATER PLANNING AREAS, GROUNDWATER CONSERVATION DISTRICTS (GCDs), COUNTIES, AND RIVER BASINS IN GROUNDWATER MANAGEMENT AREA 15 OVERLAIN ON THE EXTENT OF THE GROUNDWATER AVAILABILITY MODEL FOR THE CENTRAL PORTION OF THE GULF COAST AQUIFER SYSTEM.**

**TABLE 1. MODELED AVAILABLE GROUNDWATER FOR THE GULF COAST AQUIFER SYSTEM IN GROUNDWATER MANAGEMENT AREA 15 SUMMARIZED BY GROUNDWATER CONSERVATION DISTRICT (GCD) AND COUNTY FOR EACH DECADE BETWEEN 2010 AND 2069. VALUES ARE IN ACRE-FEET PER YEAR.**

Groundwater Conservation District	County	Aquifer	2010	2020	2030	2040	2050	2060	2069
Aransas County GCD Total	Aransas	Gulf Coast Aquifer System	1,542	1,542	1,542	1,542	1,542	1,542	1,542
Bee County GCD Total	Bee	Gulf Coast Aquifer System	9,456	9,456	9,431	9,431	9,379	9,379	9,361
Calhoun County GCD Total	Calhoun	Gulf Coast Aquifer System	2,569	7,565	7,565	7,565	7,565	7,565	7,565
Coastal Bend GCD Total	Wharton	Gulf Coast Aquifer System (Chicot and Evangeline)	181,168	181,168	181,168	181,168	181,168	181,168	181,168
Coastal Plains GCD Total	Matagorda	Gulf Coast Aquifer System (Chicot and Evangeline)	38,828	38,828	38,828	38,828	38,828	38,828	38,828
Colorado County GCD	Colorado	Gulf Coast Aquifer System (Chicot and Evangeline)	79,780	74,964	74,964	72,765	72,765	71,618	71,618
Colorado County GCD	Colorado	Gulf Coast Aquifer System (Jasper)	918	918	918	918	918	918	918
Colorado County GCD Total	Colorado	Gulf Coast Aquifer System	80,698	75,882	75,882	73,683	73,683	72,536	72,536
Evergreen UWCD Total	Karnes	Gulf Coast Aquifer System	10,196	10,196	10,196	3,015	2,917	2,751	2,751
Fayette County GCD Total	Fayette	Gulf Coast Aquifer System	1,977	1,853	1,853	1,853	1,853	1,853	1,703
Goliad County GCD Total	Goliad	Gulf Coast Aquifer System	11,420	11,539	11,539	11,539	11,539	11,552	11,539



Groundwater Conservation District	County	Aquifer	2010	2020	2030	2040	2050	2060	2069
Pecan Valley GCD Total	DeWitt	Gulf Coast Aquifer System	15,471	15,476	15,476	14,485	14,485	14,485	14,485
Refugio GCD Total	Refugio	Gulf Coast Aquifer System	5,847	5,847	5,847	5,847	5,847	5,847	5,847
Texana GCD Total	Jackson	Gulf Coast Aquifer System	76,787	90,482	90,482	90,482	90,482	90,482	90,482
Victoria County GCD Total	Victoria	Gulf Coast Aquifer System	35,640	44,974	49,970	54,966	54,966	59,963	59,963
Total (GCDs)		Gulf Coast Aquifer System	471,599	494,808	499,779	494,404	494,254	497,951	497,770
No District-County	Bee	Gulf Coast Aquifer System	10	10	10	10	10	10	10
No District-County	Lavaca	Gulf Coast Aquifer System	20,253	20,253	20,253	20,253	20,253	20,253	20,239
No district-County Total		Gulf Coast Aquifer System	20,263	20,263	20,263	20,263	20,263	20,263	20,249
Total for GMA 15		Gulf Coast Aquifer System	491,862	515,071	520,042	514,667	514,517	518,214	518,019

**TABLE 2**      **MODELED AVAILABLE GROUNDWATER BY DECADE FOR THE GULF COAST AQUIFER SYSTEM IN GROUNDWATER MANAGEMENT AREA 15. RESULTS ARE IN ACRE-FEET PER YEAR AND ARE SUMMARIZED BY COUNTY, REGIONAL WATER PLANNING AREA (RWPA), RIVER BASIN, AND AQUIFER.**

County	RWPA	River Basin	Aquifer	2020	2030	2040	2050	2060
Aransas	N	San Antonio- Nueces	Gulf Coast Aquifer System	1,542	1,542	1,542	1,542	1,542
Bee	N	San Antonio- Nueces	Gulf Coast Aquifer System	9,439	9,414	9,414	9,362	9,362
Bee	N	Nueces	Gulf Coast Aquifer System	27	27	27	27	27
Calhoun	L	Colorado- Lavaca	Gulf Coast Aquifer System	5,210	5,210	5,210	5,210	5,210
Calhoun	L	Guadalupe	Gulf Coast Aquifer System	18	18	18	18	18
Calhoun	L	Lavaca-Guadalupe	Gulf Coast Aquifer System	2,330	2,330	2,330	2,330	2,330
Calhoun	L	San Antonio- Nueces	Gulf Coast Aquifer System	7	7	7	7	7
Colorado	K	Brazos-Colorado	Gulf Coast Aquifer System (Chicot and Evangeline)	15,342	15,342	15,342	15,342	15,342
Colorado	K	Brazos-Colorado	Gulf Coast Aquifer System (Jasper Aquifer)	49	49	49	49	49
Colorado	K	Colorado	Gulf Coast Aquifer System (Chicot and Evangeline)	20,506	20,506	20,066	20,066	20,066
Colorado	K	Colorado	Gulf Coast Aquifer System (Jasper Aquifer)	273	273	273	273	273
Colorado	K	Lavaca	Gulf Coast Aquifer System (Chicot and Evangeline)	39,116	39,116	37,357	37,357	36,210
Colorado	K	Lavaca	Gulf Coast Aquifer System (Jasper Aquifer)	596	596	596	596	596
Dewitt	L	Guadalupe	Gulf Coast Aquifer System	11,358	11,358	10,470	10,470	10,470
Dewitt	L	Lavaca-Guadalupe	Gulf Coast Aquifer System	417	417	417	417	417
Dewitt	L	Lavaca	Gulf Coast Aquifer System	2,935	2,935	2,935	2,874	2,874
Dewitt	L	San Antonio	Gulf Coast Aquifer System	766	766	724	724	724



County	RWPA	River Basin	Aquifer	2020	2030	2040	2050	2060
Fayette	K	Brazos	Gulf Coast Aquifer System	2	2	2	2	2
Fayette	K	Colorado	Gulf Coast Aquifer System	989	989	989	989	989
Fayette	K	Lavaca	Gulf Coast Aquifer System	862	862	862	862	862
Goliad	L	Guadalupe	Gulf Coast Aquifer System	4,377	4,377	4,377	4,377	4,380
Goliad	L	San Antonio- Nueces	Gulf Coast Aquifer System	1,190	1,190	1,190	1,190	1,195
Goliad	L	San Antonio	Gulf Coast Aquifer System	5,972	5,972	5,972	5,972	5,977
Jackson	P	Colorado-Lavaca	Gulf Coast Aquifer System	28,025	28,025	28,025	28,025	28,025
Jackson	P	Lavaca-Guadalupe	Gulf Coast Aquifer System	12,875	12,875	12,875	12,875	12,875
Jackson	P	Lavaca	Gulf Coast Aquifer System	49,582	49,582	49,582	49,582	49,582
Karnes	L	Guadalupe	Gulf Coast Aquifer System	11	11	11	11	11
Karnes	L	Nueces	Gulf Coast Aquifer System	1,057	1,057	78	78	78
Karnes	L	San Antonio	Gulf Coast Aquifer System	9,082	9,082	2,880	2,782	2,616
Karnes	L	San Antonio-Nueces	Gulf Coast Aquifer System	46	46	46	46	46
Lavaca	P	Guadalupe	Gulf Coast Aquifer System	41	41	41	41	41
Lavaca	P	Lavaca-Guadalupe	Gulf Coast Aquifer System	401	401	401	401	401
Lavaca	P	Lavaca	Gulf Coast Aquifer System	19,811	19,811	19,811	19,811	19,811
Matagorda	K	Brazos-Colorado	Gulf Coast Aquifer System (Chicot and Evangeline)	15,282	15,282	15,282	15,282	15,282
Matagorda	K	Colorado-Lavaca	Gulf Coast Aquifer System (Chicot and Evangeline)	20,329	20,329	20,329	20,329	20,329
Matagorda	K	Colorado	Gulf Coast Aquifer System (Chicot and Evangeline)	3,217	3,217	3,217	3,217	3,217
Refugio	L	San Antonio- Nueces	Jasper Aquifer	5,526	5,526	5,526	5,526	5,526
Refugio	L	San Antonio	Gulf Coast Aquifer System	321	321	321	321	321
Victoria	L	Guadalupe	Gulf Coast Aquifer System	17,600	22,596	27,592	27,592	27,592
Victoria	L	Lavaca-Guadalupe	Gulf Coast Aquifer System	25,451	25,451	25,451	25,451	30,448
Victoria	L	Lavaca	Gulf Coast Aquifer System	234	234	234	234	234
Victoria	L	San Antonio	Gulf Coast Aquifer System	1,689	1,689	1,689	1,689	1,689

County	RWPA	River Basin	Aquifer	2020	2030	2040	2050	2060
Wharton	K	Brazos-Colorado	Gulf Coast Aquifer System (Chicot and Evangeline)	50,527	50,527	50,527	50,527	50,527
Wharton	K	Colorado-Lavaca	Gulf Coast Aquifer System (Chicot and Evangeline)	16,196	16,196	16,196	16,196	16,196
Wharton	P	Colorado-Lavaca	Gulf Coast Aquifer System (Chicot and Evangeline)	14,091	14,091	14,091	14,091	14,091
Wharton	K	Colorado	Gulf Coast Aquifer System (Chicot and Evangeline)	35,910	35,910	35,910	35,910	35,910
Wharton	P	Colorado	Gulf Coast Aquifer System (Chicot and Evangeline)	873	873	873	873	873
Wharton	K	Lavaca	Gulf Coast Aquifer System (Chicot and Evangeline)	579	579	579	579	579
Wharton	P	Lavaca	Gulf Coast Aquifer System (Chicot and Evangeline)	62,992	62,992	62,992	62,992	62,992
<b>GMA 15 Total</b>			<b>Gulf Coast Aquifer System</b>	<b>515,071</b>	<b>520,042</b>	<b>514,667</b>	<b>514,517</b>	<b>518,214</b>

### ***LIMITATIONS:***

The groundwater model used in completing this analysis is the best available scientific tool that can be used to meet the stated objectives. To the extent that this analysis will be used for planning purposes and/or regulatory purposes related to pumping in the past and into the future, it is important to recognize the assumptions and limitations associated with the use of the results. In reviewing the use of models in environmental regulatory decision making, the National Research Council (2007) noted:

“Models will always be constrained by computational limitations, assumptions, and knowledge gaps. They can best be viewed as tools to help inform decisions rather than as machines to generate truth or make decisions. Scientific advances will never make it possible to build a perfect model that accounts for every aspect of reality or to prove that a given model is correct in all respects for a particular regulatory application. These characteristics make evaluation of a regulatory model more complex than solely a comparison of measurement data with model results.”

A key aspect of using the groundwater model to evaluate historic groundwater flow conditions includes the assumptions about the location in the aquifer where historic pumping was placed. Understanding the amount and location of historic pumping is as important as evaluating the volume of groundwater flow into and out of the district, between aquifers within the district (as applicable), interactions with surface water (as applicable), recharge to the aquifer system (as applicable), and other metrics that describe the impacts of that pumping. In addition, assumptions regarding precipitation, recharge, and streamflow are specific to a particular historic time period.

Because the application of the groundwater model was designed to address regional scale questions, the results are most effective on a regional scale. The TWDB makes no warranties or representations relating to the actual conditions of any aquifer at a particular location or at a particular time.

It is important for groundwater conservation districts to monitor groundwater pumping and groundwater levels in the aquifer. Because of the limitations of the groundwater model and the assumptions in this analysis, it is important that the groundwater conservation districts work with the TWDB to refine this analysis in the future given the reality of how the aquifer responds to the actual amount and location of pumping now and in the future. Historic precipitation patterns also need to be placed in context as future climatic conditions, such as dry and wet year precipitation patterns, may differ and affect groundwater flow conditions.

**REFERENCES:**

- Chowdhury, A., Wade, S., Mace, R.E., and Ridgeway, C. 2004. Groundwater Availability of the Central Gulf Coast Aquifer System: Numerical Simulations through 1999: Texas Water Development Board, unpublished report.
- Harbaugh, A. W., 2009, Zonebudget Version 3.01, A computer program for computing subregional water budgets for MODFLOW ground-water flow models, U.S. Geological Survey Groundwater Software.
- Harbaugh, A.W. and McDonald, M.G., 1996, User's documentation for MODFLOW-96, an update to the U.S. Geological Survey Modular Finite-Difference Ground-Water Flow Model: U.S. Geological Survey, Open-File Report 96-485.
- National Research Council, 2007, Models in Environmental Regulatory Decision Making Committee on Models in the Regulatory Decision Process, National Academies Press, Washington D.C., 287 p., [http://www.nap.edu/catalog.php?record\\_id=11972](http://www.nap.edu/catalog.php?record_id=11972).
- Texas Water Code, 2011, <http://www.statutes.legis.state.tx.us/docs/WA/pdf/WA.36.pdf>.
- Waterstone Engineering, Inc., and Parsons, Inc., 2003, Groundwater Availability of the Central Gulf Coast Aquifer: Numerical Simulations to 2050, Central Gulf Coast, Texas: Contract draft report submitted to Texas Water Development Board