

FTS 2201-2 A0 LED


Medium Intensity Red LED Lighting System

Application

The FTS 2201-2 LED is an FAA OL2 (L810) system that includes red steady burning lights for night to create an FAA tower type A0 for structures less than 150' AGL.

Features/Benefits

- Automatic fail safe to night mode and notification if system has not changed states in 19 hours
- 5 year warranty
- (1) Dry contact monitoring alarm point
- No EMI or RF
- Supply voltage 120 VAC
- Manual "ON-Auto-OFF" switch
- Photocell mode control with status indicators
- Lockable weatherproof enclosure
- Optional: Wireless synchronization

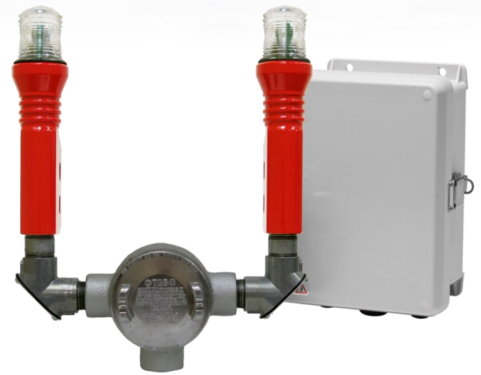

Power Consumption

- Marker fixture—5.4W total
- Controller— 4W

FTS 2201-2 A0 LED

Medium Intensity Red LED Lighting System

Diagram from FAA Advisory Circular AC 70/7460-1K Change 2, A1-18.
The FAA determination of no hazard for these towers are: Chapters 2, 3, 4, 5, 12



These guidelines are for reference only. Please contact Flash for specific questions regarding obstruction marking.