

2


1

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
2.3	ADDED NOTES	7-06	CFS

- NOTES:
1. MINIMUM 19 LBS TENSILE (PULL) STRENGTH REQUIRED. IF CRIMPING OPERATION UNABLE TO MEET THIS REQUIREMENT, SOLDER WIRES TO TERMINALS.
  2. MAXIMUM APPROVED CABLE LENGTH FOR WEG02-CBL-XX IS 12 FOOT.

TERMINAL	COLOR	SIGNAL
1	RED	WB_PUMP
2	BLACK	WB_CELL
3	BROWN	WB_COM
4	WHITE	WB_HTR-
5	GREEN	WB_HTR+
6	SEAL	

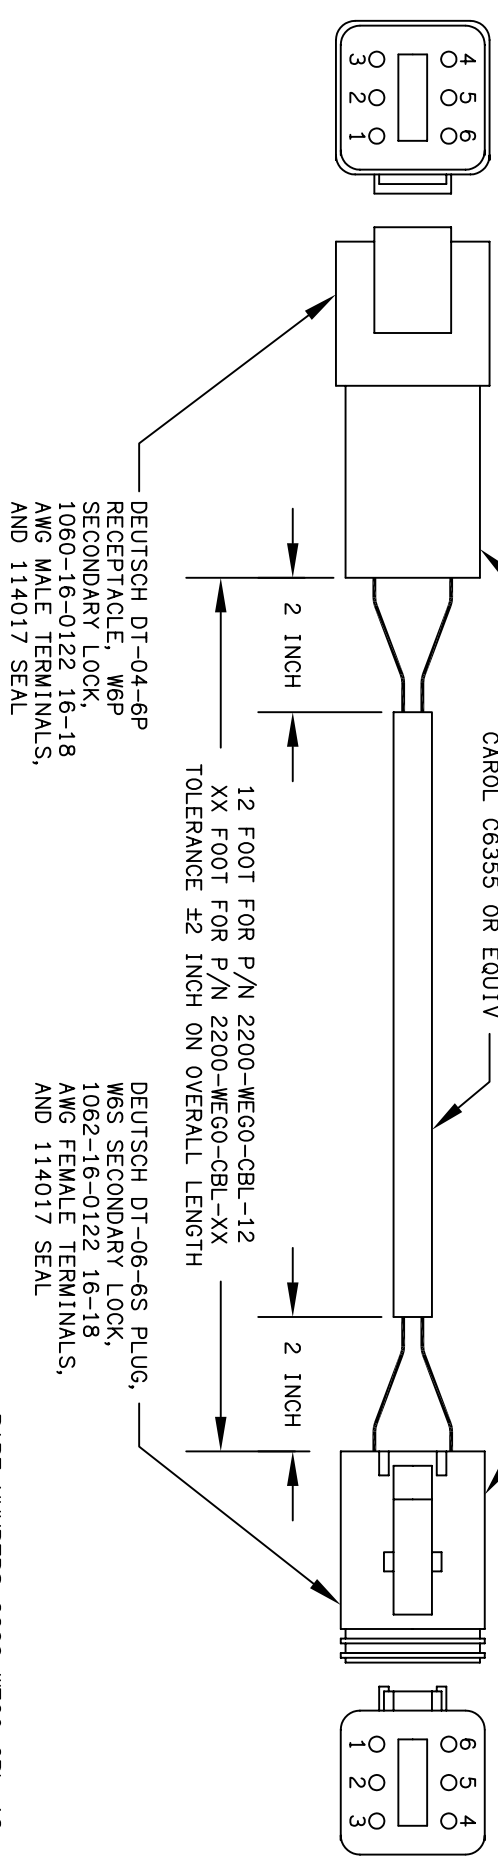

NOTE: IF HAND CRIMPING IS REQUIRED, USE DEUTSCH DTT-16-00 CRIMPING TOOL AND 16 AWG POSITION.

PART NUMBERS 2200-WEGO-CBL-12  
2200-WEGO-CBL-XX

**Daytona Sensors**  
933 BEVILLE ROAD, SUITE 101-1  
SOUTH DAYTONA, FL 32119

DO NOT SCALE

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES TOLERANCES ±.125

WEGO EXTENSION WIRE HARNESS

DRAWN	7-04	CFS	SHEET	A	SCALE	NONE
APPROVED	7-04	CFS	1 OF	2	DRAWING NO.	2208

2

1