

Houston International Specialty Inc.

Size	9.625
Grade	N/L 80
Weight	47

TCPC



Coupling and Pipe Dimensions (in)						
	Outer Diameter	Inner Diameter	Coupling Length	Make-up Loss	Wall Thickness	Drift Diameter
Coupling	10.610	8.681				
Pipe		8.681	11.800	5.523	0.472	8.525
Pin		8.681				

Torque Values (ft-lbs)				
During Make-Up			Max. Working Torque	Yield Torque
Minimum	Optimum	Maximum		
16,200	17,500	18,800	40,000	62,000

Yield Stress (x1000 lbs.)	
Tensile	Compressive
1,086	1,086

Maximum Pressure (psi)	
Internal	External
7,060	4,760

Blanking Dimensions (in)			
	ID (+0.0 -0.032)	OD (+0.032 -0.0)	OAL (+1.5 -0.0)
Box End	8.681	10.610	6.523
Pin End	8.681	9.625	6.023

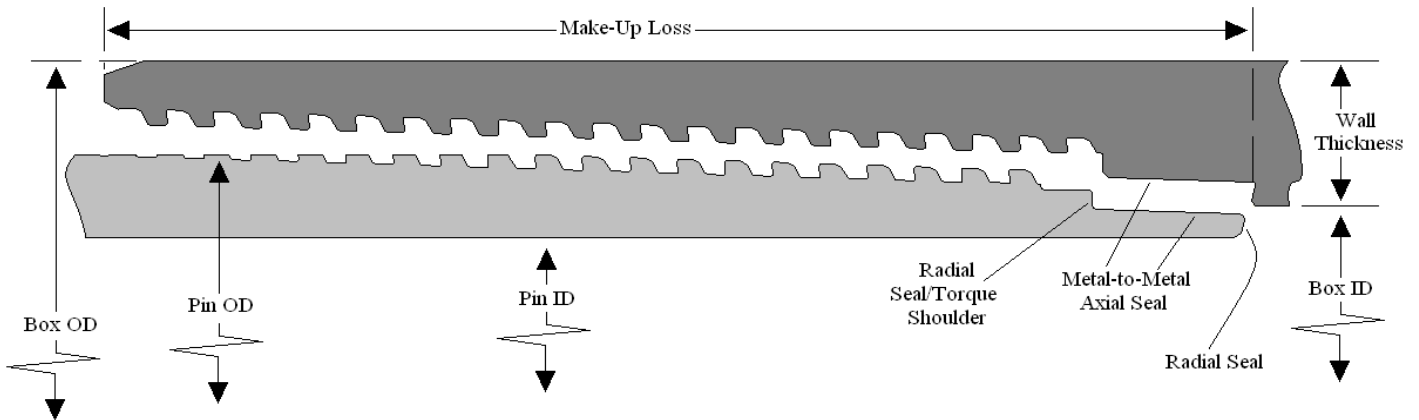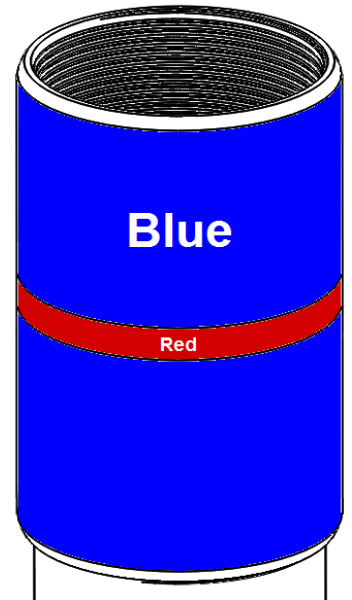

*Data are for information purposes only. Though HIS has made efforts to ensure accuracy, HIS makes no warranty for loss or damage due to its use.