



Gardco Gullwing G18



Cool-Lite Retrofit Kit for Gullwing G18 series

## Specifications

- Wattage - 112W/168W
- Weight - 17.17 lbs
- Input Total Power - 123W/179W
- Lumens - 13500/17030 @4500 Kelvin
- Luminated Area - 20ft: 85ft x 85ft ;24ft : 118ft x 118ft ; 30ft : 138ft x 138ft
- Illuminance Uniformity - >0.6
- Input Voltage - 110/115-220/277/480
- Input Voltage - ≥90%
- Current - Single 325 mA
- Meanwell Drivers - HLG-150H/HLG-185H
- LED Single Power - 1W/1.5W
- Lumen Per Watt - ≥110Lm/W
- Environmental Temperature - 95F~122F
- Lamp Temperature - <122F
- Efficiency - >90%
- CRI - >70
- Power Factor - >0.95
- IP - IP65

## Features

- Custom LED retrofit kit for the Gardco Gullwing Series fixtures.
- Five Kelvin options to choose from: 3000k or 3500k, 4000k or 4500k, 5000k for allowing the best choice for each application.
- Retrofit kit comes completely assembled for simple snap-in installation.
- 5 year warranty.





## Ordering Information

**EXAMPLE:** LD4SE-112W-4K-<480V-T5-GW18

Template	Sensor	Wattage	Kelvin	Voltage	Lens	Paint Color
LD4	SE (Enlighted Sensor)	112W	3k or 3.5k	277V	T2	01-Gray 02-Brown 03-White 04-Black 05-Bronze 06-Silver 07-Green 08-Blue
	SW (Wattstopper Sensor)	168W	4k or 4.5k	480V	T3	
	N (Standard)		5k		T5	





### Photometrics Showing Type-2 & 3 Distribution

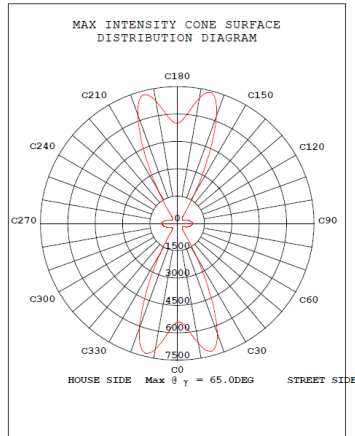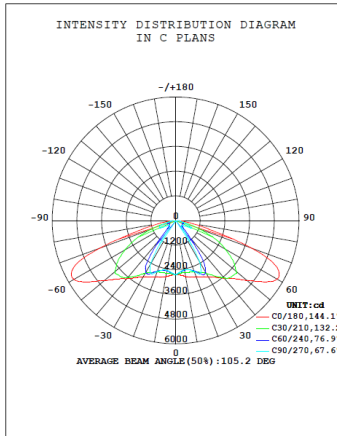

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: JRM  
 Test Date: 2012-07-30



γ Range: 0 - 90DEG  
 γ Interval: 0.5DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.262  
 Humidity: 65.0%  
 Test Distance: 9.970m [K=1.0000]  
 Remarks: 112W GLC-LD02

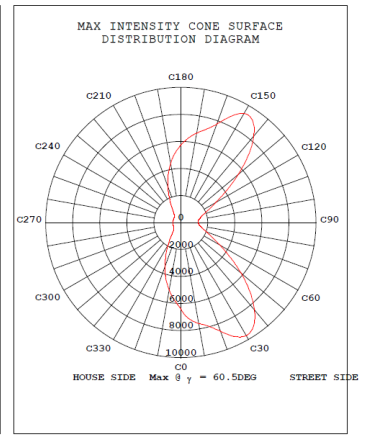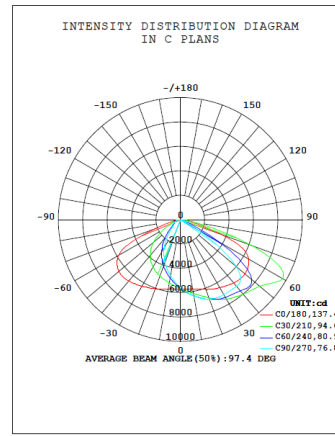

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: MEDIUM  
 Temperature: 25.3DEG  
 Operators: Fq  
 Test Date: 2015-11-07

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.262  
 Humidity: 65.0%  
 Test Distance: 9.970m [K=1.0000]  
 Remarks:

### Photometrics Showing Type-5 Distribution

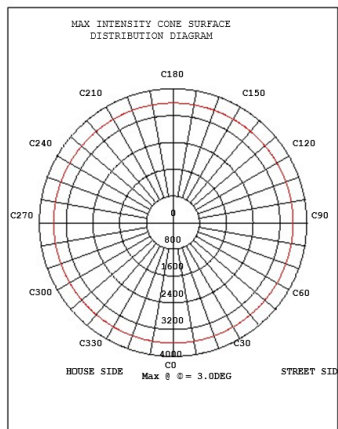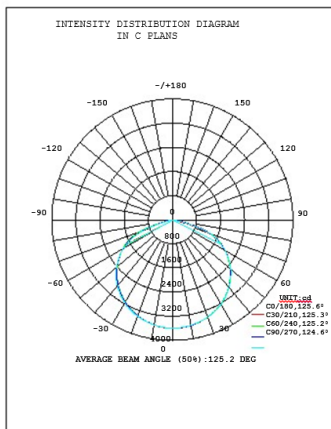

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Test Date: 2014-04-26

© Range: 0 - 90DEG  
 © Interval: 0.5DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.262  
 Humidity: 65.0%  
 Test Distance: 9.970m [K=1.0000]