




COMANSA

LINDEN 1000


LC-1040

8t

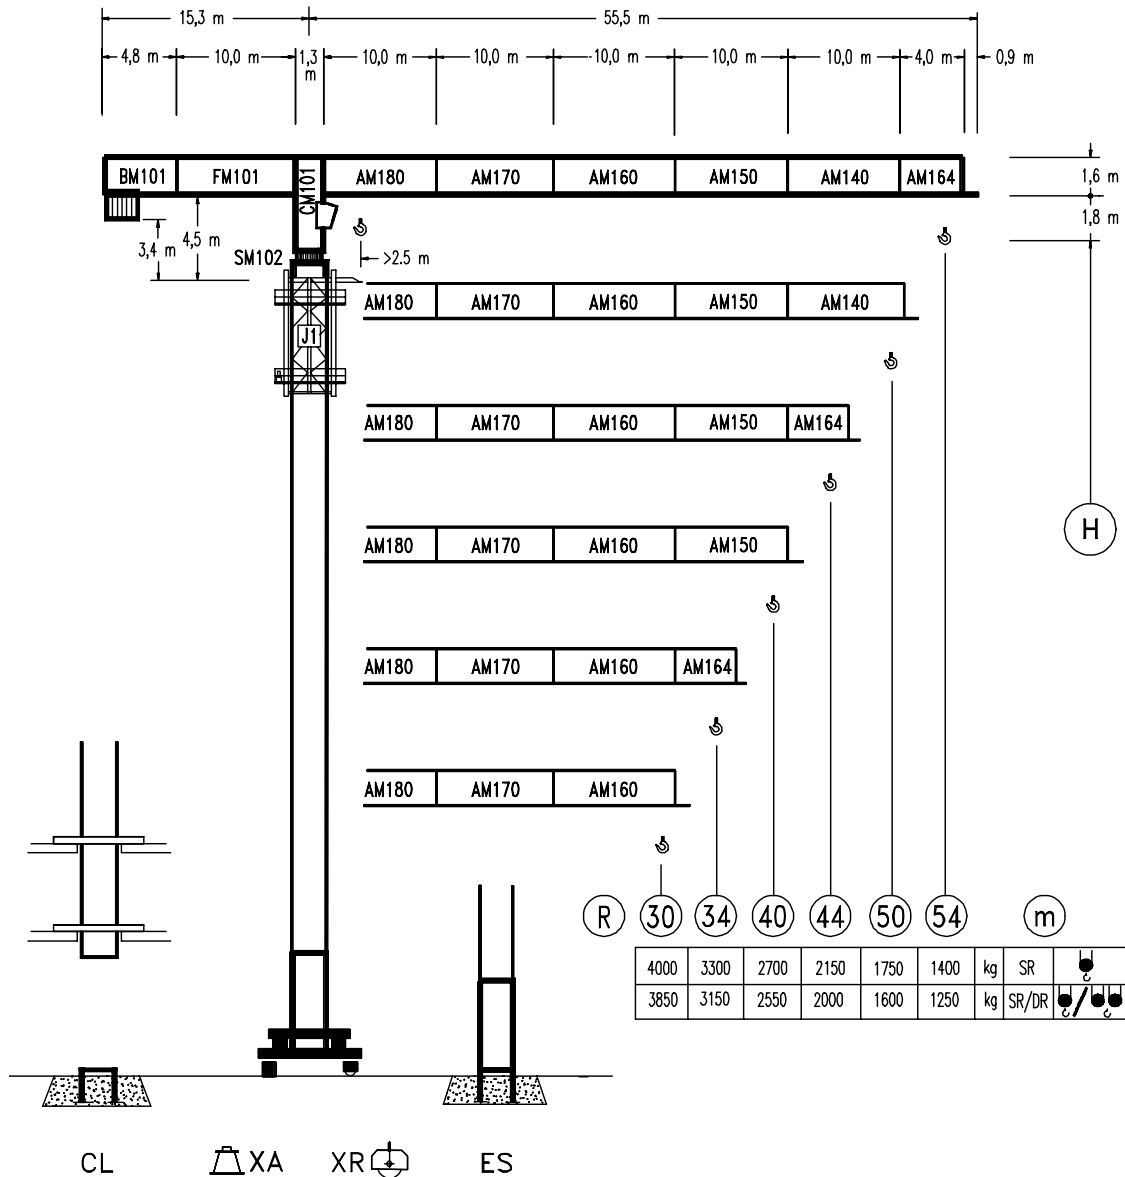

CE
DIN 15018 H1 B3

R		R _(Cmax)	C _{max}	25	30	34	40	44	50	54	m
54	SR	22,6 m	4000	3565	2890	2490	2050	1820	1550	1400	kg
	SR/DR	12,1 m	8000	3445	2760	2355	1905	1675	1400	1250	
50	SR	24,9 m	4000	3975	3230	2790	2300	2050	1750		kg
	SR/DR	13,3 m	8000	3855	3095	2655	2160	1905	1600		
44	SR	25,9 m	4000	4000	3375	2920	2410	2150			kg
	SR/DR	13,7 m	8000	4025	3235	2780	2265	2000			
40	SR	28,4 m	4000	4000	3765	3260	2700				kg
	SR/DR	15,1 m	8000	4485	3620	3115	2550				
34	SR	28,7 m	4000	4000	3805	3300					kg
	SR/DR	15,2 m	8000	4535	3660	3150					
30	SR	30,0 m	4000	4000	4000						kg
	SR/DR	15,8 m	8000	4760	3850						

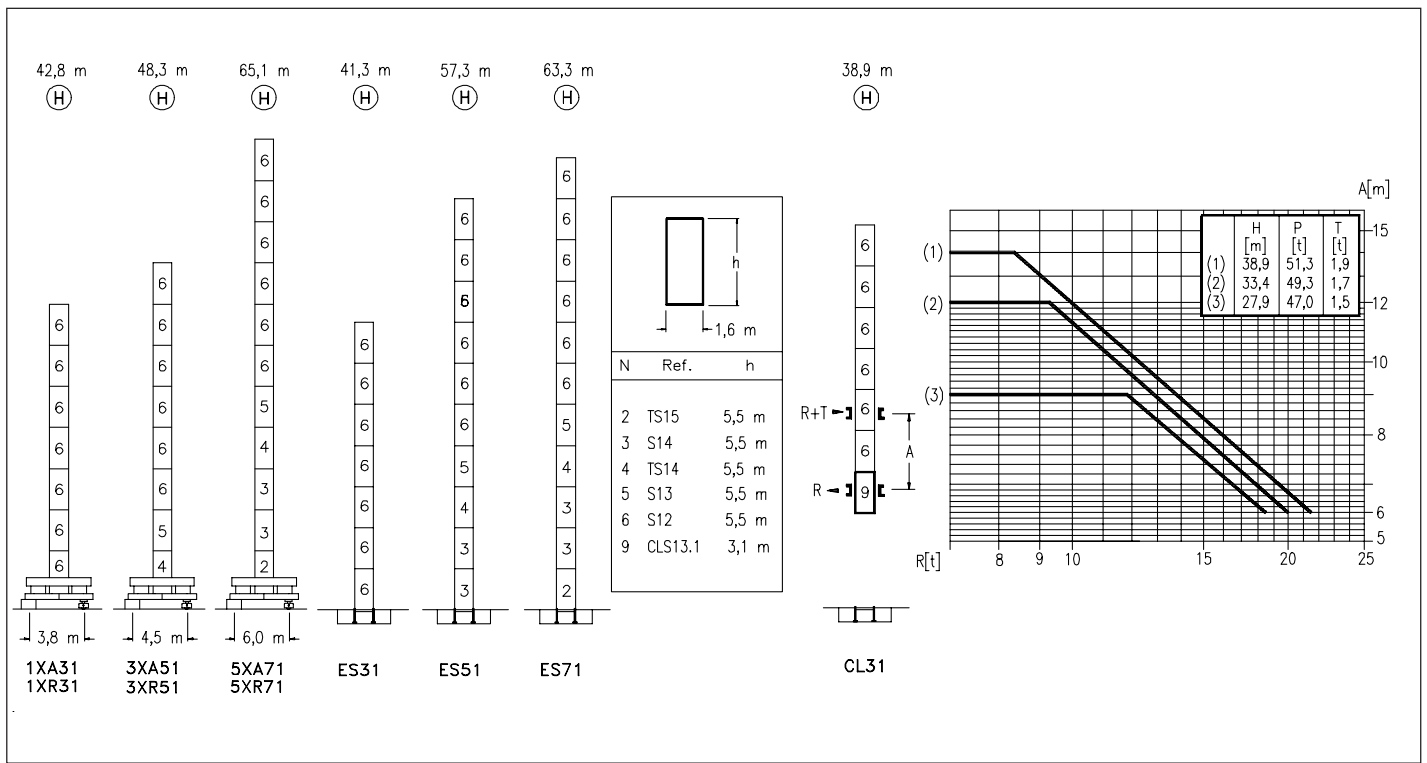

CS3-3.7
3,7 kW

10 m/min
33 m/min
66 m/min

CFU-4.0
4 kW

0 ϕ 66 m/min

GR-12
120 Nm

0 ϕ 0,7 rpm

TS2-5.5 | **TRA-7.5**
2 x 55 Nm | 2 x 75 Nm

0 ϕ 20 m/min

1XR31
3XR51

5XR71

TRA-7.5VC
2 x 75 Nm

0 ϕ 20 m/min

5XR71

ES3-25-20
25 kW

		I	II	III
SR	m/min	7	28	56
	t	4	4	2
DR	m/min	3,5	14	28
	t	8	8	4

EFU2-24-20
24 kW

SR: 1,6 m/min vs 77 m/min

DR: 3,2 m/min vs 38 m/min

EFU2-37-20
37 kW

SR: 1,2 m/min vs 110 m/min

DR: 2,4 m/min vs 55 m/min

ES3-33-20
33 kW

		I	II	III
SR	m/min	9	36	72
	t	4	4	2
DR	m/min	4,5	18	36
	t	8	8	4

Tensión de alimentación Operating voltage Tension de service Betriebsspannung	400 V 3 ph 50 Hz
--	---

Opcional
Optional
En option
Kaufoption

R. máx.	En servicio In operation En service In Betrieb	1XR31 61,2 t 3XR51 56,5 t 5XR71 71,1 t
----------------	---	--

R. máx.	Fuera de servicio Out of service Hors service Ausser Betrieb	1XR31 73,4 t 3XR51 81,5 t 5XR71 111,7 t
----------------	---	---



Construcciones Metálicas COMANSA S. A.
Polígono Industrial de Areta
E-31620 Huarte-Pamplona.- SPAIN
Tel.: (34) 948 335 020 - Fax: (34) 948 330 810
e-mail: info@comansa.com