

TRU TUF 600 PIPE

TRU TUF 600 PIPE offers superior abrasion resistance in a heat treated pipe with an I.D. hardness of 600 Brinell. Elbows and fittings with similar hardness are also available. We utilize a special chemistry rolled into nominal pipe sizes to be used with standard welded flanges.

APPLICATIONS



- **Foundry** – Sand recycling
- **Power Plants** – Fly ash and bottom ash disposal along with coal slurry transportation
- **Pulp & Paper** – Wood chip movement
- **Mining** – Tailing lines

AVAILABLE

Diameters – 2-1/2" I.P.S. to 40" I.P.S.
Lengths – as required up to 50 Ft.

FABRICATION SERVICE AVAILABLE

End preparation for welding or grooved for couplings. Bent shapes available. Flanges can be welded in place or shipped loose. Elbows and laterals available in either a **TRU TUF 600 PIPE** (hardened I.D.) or TRU KROCARB I.D.

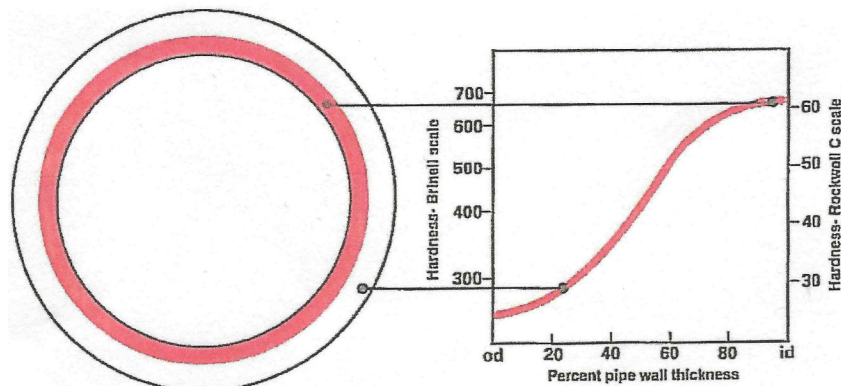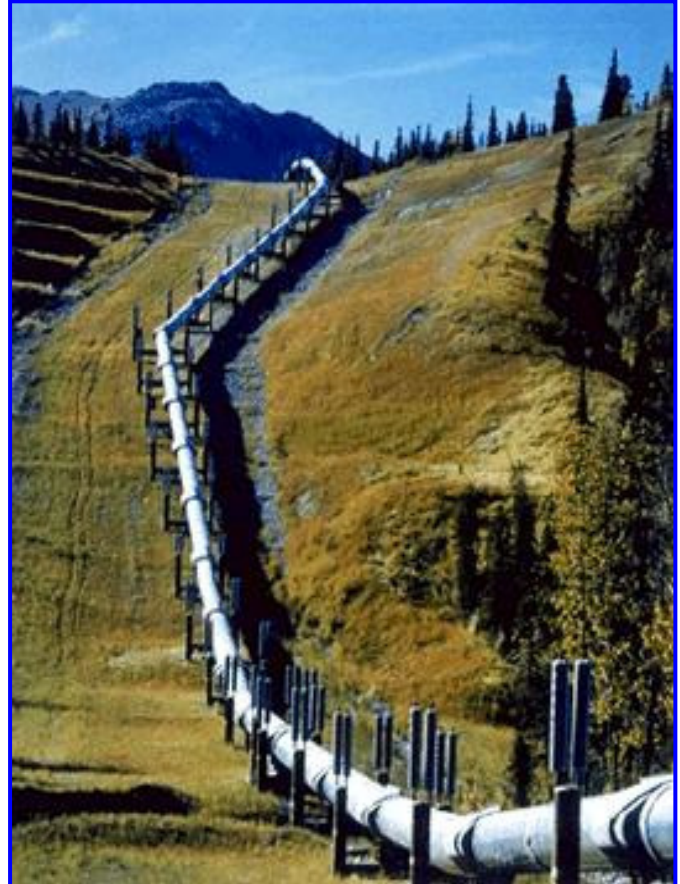

Typical Hardness Pattern

*Please contact your **TRU STEEL METALS** sales representative for more information about **TRU TUF 600 PIPE**