


FTW 170

GPS Wireless Synchronization Unit

Application

The FTW 170/170-2 Wireless Synchronization unit supplies a timing pulse to synchronize flashing obstruction lighting on any number of controllers/power converters manufactured by Flash Technology. The structures needing synchronized can be any distance apart without limit.

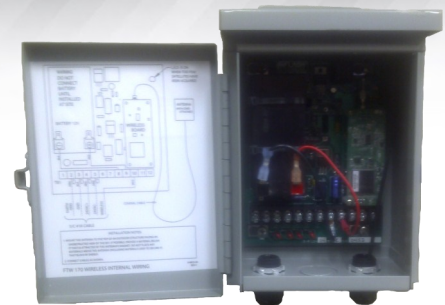

Features/Benefits

- Wirelessly synchronize multiple flashing structures
- Quick & easy install
- Battery back-up ensures operation during power outages
- Up to 500 feet separation from controller (FTW 170-2)
- Lockable weatherproof enclosure
- (1) year warranty
- Designed for Flash Technology systems only

Specifications

Dimensions	8.25H x 6.50W x 4.5D in.
Weight	6.5 lbs
AC Voltage	24VAC
Power	5VA
Battery back-up	24+hours

Location

The location of the FTW 170/170-2 must be selected to provide for good reception by its antenna. The antenna must be mounted horizontally with an unobstructed view of the full sky. The GPS information travels by “line of sight” and cannot penetrate through most barriers.

Applications

- Buildings
- Bridges
- Towers
- Wind Farms
- Oil Platforms