

ACCESSORIES

FOR AUTOMATIC LUBRICATOR



ACCESSORIES

Progressive distribution blocks:
2, 3, 4, 6, 8, 12 port

Weatherproof caps (optional)

Programmable options
(Ultimate, Titan & Jack series)

Accessories for remote power
& control options

Clamps

Nylon Hose

Various adaptors-Standard & Metric

Battery packs

Oil brushes



ABOUT ATS

ATS ELECTRO-LUBE has been manufacturing and selling Electro-Lube™ Automatic Electronic Lube Dispensers worldwide for over 30 years. The product was invented and designed by our founder, and is manufactured in British Columbia, Canada.

In 2000, the company introduced a new line of motorized Lubricators for the industrial market, the MD2000™ series. This product provides both single and multi-point lubrication using progressive distribution blocks. These units are the most powerful self-contained lubricators on the market. In 2005, the motor-driven Ultimate series was developed from the MD2000™ series.

The TITAN CL motorized lubricator was introduced in 2007. The TITAN CL incorporates the proven pump and electronics of our MD2000 line while using industry standard grease cartridges for ease of refilling. The two cartridge TITAN II motor-driven lubricant dispenser followed.

The latest additions to our family of lubricators are the powerful TITAN OILER and JACK LUBER.

ATS IS COMMITTED TO IMPROVING AND DEVELOPING PRODUCTS TO SATISFY THE GROWING NEEDS OF INDUSTRIES FOR DECADES TO COME.



OVER 30 YEARS OF MANUFACTURING RELIABLE LUBRICATION PRODUCTS FOR AN INDUSTRIAL WORLD


TYPICAL INDUSTRIES AND APPLICATIONS

- Mining/Minerals**
 - Stacker Cranes
 - Crushers/Grinders/Shakers
 - Bucket Elevators
 - Conveyors
- Manufacturing**
 - Slurry Pumps
 - Bridge Cranes
 - Conveyors
 - Hoists
 - Heat Treat furnaces
 - Chain Lubricators
 - Robots
- Food and Beverage**
 - Packaging Lines
 - Mixers
 - Washers, Dryers
 - Can/Bottling Lines
 - Ovens
- Building Maintenance**
 - Elevators/Escalators
 - Motors
 - HVAC
 - Air Handlers/Filters
 - Waste Water Treatment
 - Potable Water Plants
- Municipal**
 - Incinerators
 - Rolling Mills
- Metals**
 - Material Handling
 - Cooling Pumps
 - Furnace Trunions and Fans
- Pulp and Paper**
 - Lumber Mills
 - Paper and Fiberboard Mfg.
 - Slurry Pumps
 - Dryers
- Agriculture**
 - Flour Mills
 - Grain Mills
 - Feed Mills
- Energy**
 - Coal Handling Equipment
 - Drills, Pumps
 - Refinery Operations
 - Wind Turbines

Distributed By:



THE MOST
POWERFUL
SELF-CONTAINED
LUBRICATORS
IN THE WORLD

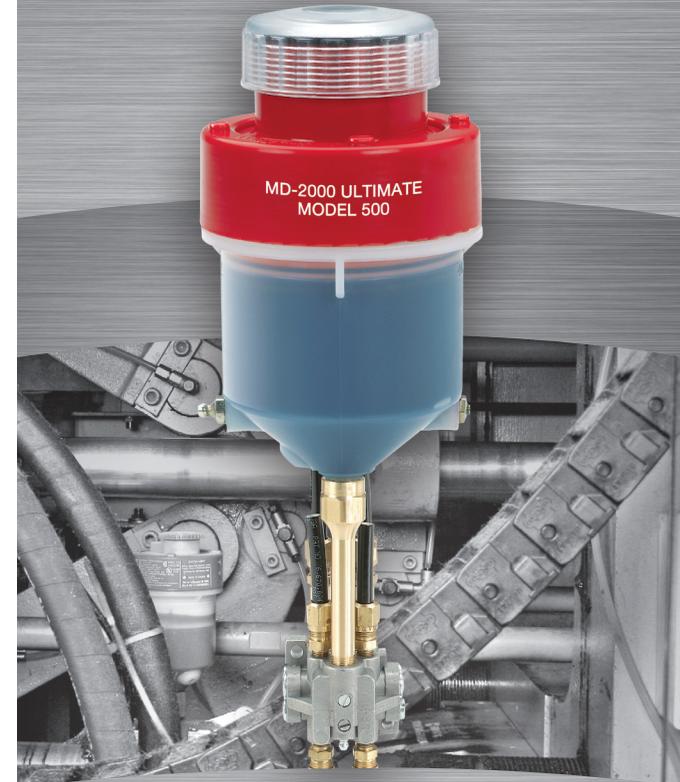

ATS ELECTRO-LUBE
INTERNATIONAL INCORPORATED

www.atselectrolube.com

www.atselectrolube.com

7388 Wilson Avenue, Delta, BC Canada V4G 1H3

www.atselectrolube.com

TOLL FREE PHONE: 1-800-663-8141

ELECTRO-LUBER SERIES

GAS-DRIVEN LUBRICANT DISPENSER – 50 PSI

ULTIMATE SERIES

MOTOR-DRIVEN LUBRICANT DISPENSER – 900 PSI

TITAN SERIES

MOTOR-DRIVEN CARTRIDGE LUBRICANT DISPENSER – 900 PSI

JACK SERIES

MOTOR-DRIVEN JACKSCREW LUBRICANT DISPENSER – 175 PSI



16 oz/ 475cc 8 oz/ 250cc 4 oz/ 125cc 2 oz/ 60cc



17 oz/ 500cc 8 oz/ 250cc 4 oz/ 125cc



Titan II Titan Oiler



Jack Luber Replacement Cartridge

COMPARE AT A GLANCE	ELECTRO-LUBER SERIES	ULTIMATE SERIES	TITAN SERIES	JACK SERIES
APPLICATION	Single Point	Single or Multi-point (up to 12 points)	Single or Multi-point (up to 12 points)	Single or Multi-Point (up to 12 points)
SIZES	Available in 2, 4, 8, or 16 oz. capacity (60, 125, 250 or 475cc)	Available in 4, 8, or 17 oz. capacity (125, 250 or 500cc)	Requires 1 or 2 - 14oz. grease cartridge. Oiler has 47 oz. capacity	Available in 4 oz. capacity (125cc)
TECHNOLOGY	Safe, Inert Nitrogen gas powered	Powerful mechanical fixed-displacement pump	Powerful mechanical fixed-displacement pump. Proven Ultimate Series technology	Powerful mechanical fixed-displacement pump. Jackscrew mechanism incorporated with proven Ultimate Series technology
DISPENSING POWER	Up to 50 psi. Can be remote mounted up to 3 ft	Up to 900 psi. Can be remote mounted up to 30 ft	Up to 900 psi. Can be remote mounted up to 30 ft	Over 175 psi. Can be remote mounted up to 20 ft
POWER SOURCE	AA Alkaline Batteries	Battery pack or remote AC/DC power	Battery pack or remote AC/DC power	Battery pack or remote AC/DC power
CYCLE	Single use, Disposable	Refillable with standard grease gun or pump	Refillable with standard grease cartridge(s). Oiler refillable through screened port	Reusable motor drive unit and easily replaceable single-use cartridge
LUBE CHOICE	Customer specified lube	Customer Fill/Refill	Customer Fill/Refill	Customer specified lube
OPERATING SPAN	14 days to 1 year on factory filled unit	Refilled as needed. Variable from 14 days to 2 years	Cartridge replaced or oiler refilled as needed. Variable from 14 days to 2 years	Cartridge replaced as needed. Variable from 14 days to 2 years
LED INDICATORS	Positive verification unit is working	Tri-color LEDs to indicate normal operation, low battery, low temp.	Tri-color LEDs indicate normal operation, low battery, low lube level, low temp. Oiler has low lube indicator.	Tricolor LEDs indicate normal operation, low battery, low temp
WEATHERPROOF	Waterproof (Submerged) to 30 ft Temp range -40°F to 131°F (-40°C to 55°C) Weathercap available	Suitable for outdoor use in temp range 5°F to 132°F (-15°C to 55°C) Weathercap available	Suitable for outdoor use in temp range 5°F to 132°F (-15°C to 55°C) Weathercap available for cannister and control unit.	Suitable for outdoor use in temp range -40°F to 140°F (-40°C to 60°C) Weathercap available
DISPENSING RATE	Established flowrates, simply select and install	Standard timed intervals or custom programming available	Standard timed intervals or custom programming available	Standard timed intervals or custom programming available
APPROVALS	UL & Cui approved Intrinsically Safe for all areas; MSHA, Energy Mines Canada BAS00ATEX 1228X/1 Approval	UL Division 2 Approval in Process Atex Approval in Process	UL Division 2 Approval in Process Atex Approval in Process	UL Division 2 Approval in Process Atex Approval in Process

TOLL FREE PHONE: 1-800-663-8141

TOLL FREE FAX: 1-800-663-8140

BUS: (604) 946-1308 FAX: (604) 946-0427

www.atselectrolube.com