

Houston International Specialty Inc.

Size	5.5
Grade	N/L 80
Weight	23


TCBC-HT

Coupling and Pipe Dimensions (in)						
	Outer Diameter	Inner Diameter	Coupling Length	Make-up Loss	Wall Thickness	Drift Diameter
Coupling	6.300	5.410				
Pipe		4.670	8.250	4.125	0.415	4.545
Pin		4.670				

Torque Values (ft-lbs)				
Field End Make-Up			Max. Working Torque ¹	Yield Torque
Minimum	Optimum ²	Maximum		
8,800	11,500	14,200	16,500	20,800


Yield Stress (x1000 lbs.)	
Tensile	Compressive
530	530

Maximum Pressure (psi)	
Internal	External
10,560	11,160

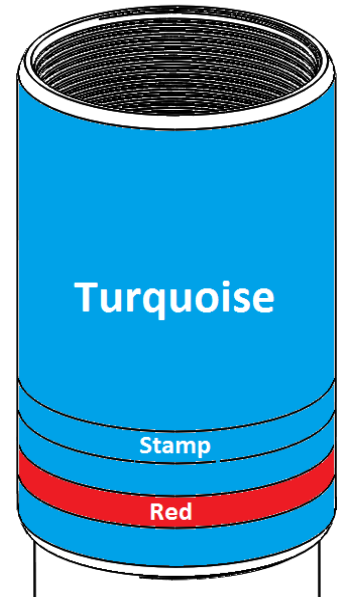

¹ Max. Working Torque value is not to be exceeded during operation.

² If Optimum Torque does not meet the Base of Triangle Stamp, M/U to the Base of Triangle.

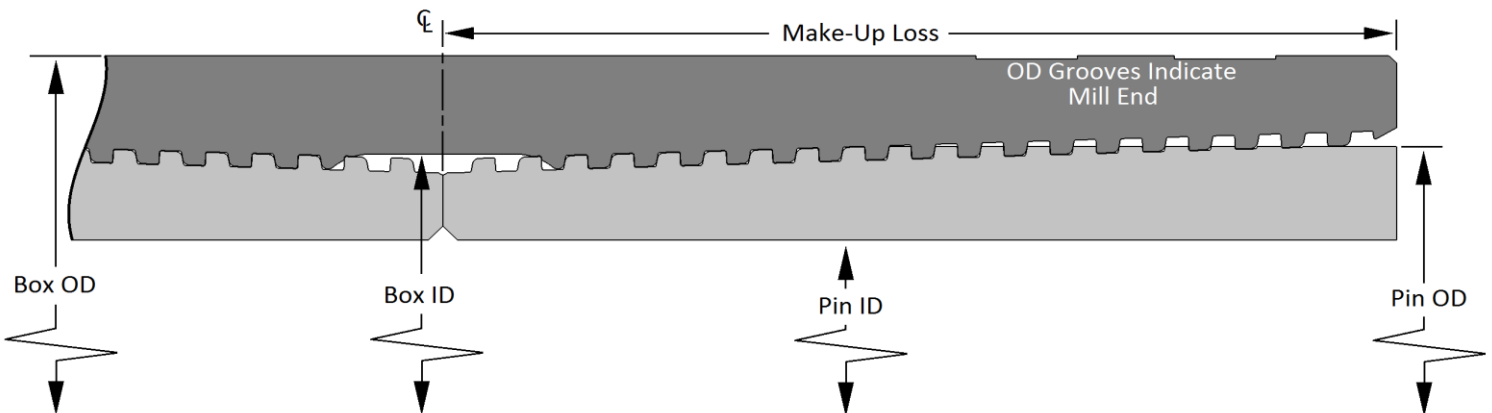

*Data are for information purposes only. Though HIS has made efforts to ensure accuracy, HIS makes no warranty for loss or damage due to its use.

rev B

19996 Hickory Twig Way Spring, TX 77388
 Phone: (281) 602-7550
 Fax: (281) 602-7557