


Multi-Purpose Robot



Radio Remote-Controlled



Drilling




Crushing



Breaking

... the **HD50-RB**

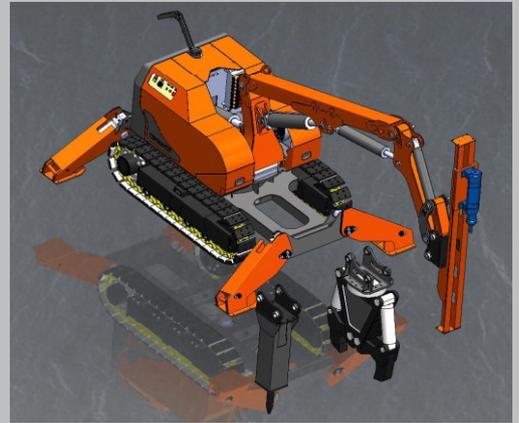






ALL FUNCTIONS ON THE RADIO REMOTE CONTROL
(including the drilling function)

SERVICE WEIGHT	Approx. 4,600 kg (10,120 lb)
DRIVE	Electric Motor, 37 kW(50HP), 50Hz Electric Motor, 44kW (59HP), 60Hz
HYDRAULIC SYSTEM	Variable Piston Pump with Loading Sensing (50Hz) Q = 104 l/min. (27.5 gpm) ; P1 = 165 Bar (2,390 psi) (60Hz) Q = 125 l/min. (33 gpm) ; P1 = 165 Bar (2,390 psi)
HYDRAULIC OIL TANK	Capacity 160 ltr (42 gallon)
CRAWLER UNDERCARRIAGE	Slewing Ring – 360° Rotation Slewing Speed : 0 -15 sec/360° Travelling Speed : 0 - 2 km/hr (1.24 mph) Gradeability : 30°
MAX. WEIGHT OF ATTACHMENT	600 kg (1,320 lb)
TRANSPORTATION DIMENSIONS	Length : 4250 mm (13.9 ft) Width : 1500 mm (4.9 ft) Height : 1750 mm (5.7 ft)

HD50-RB

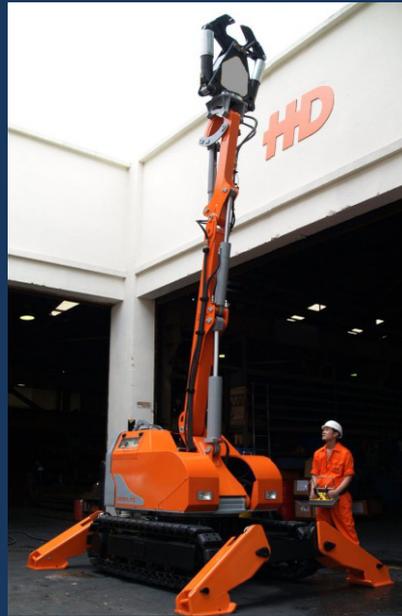

Reaching Dimensions in m (ft.)

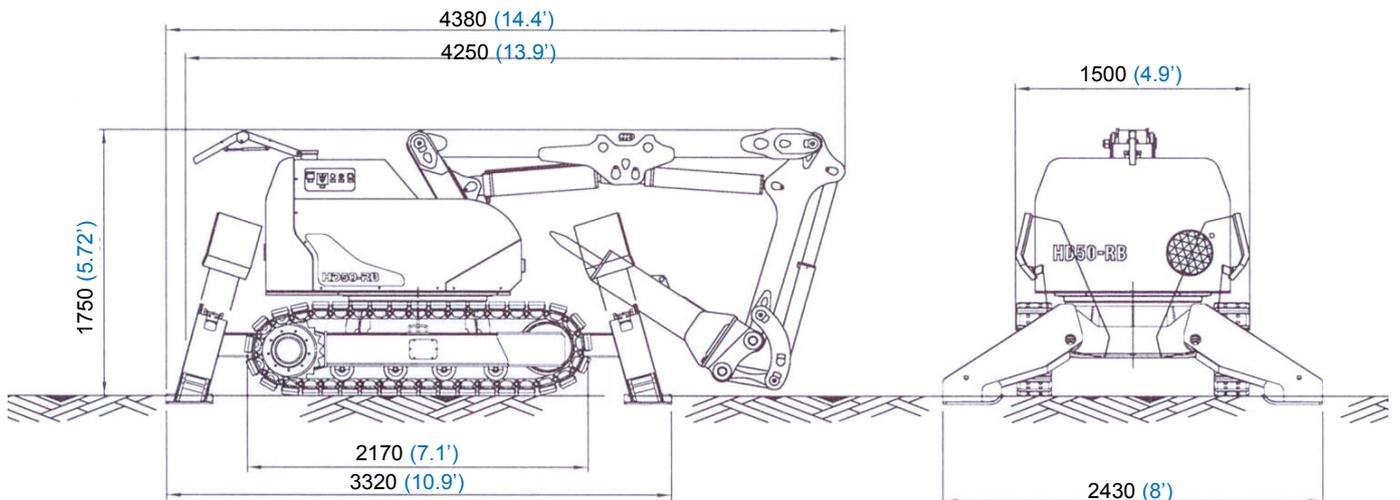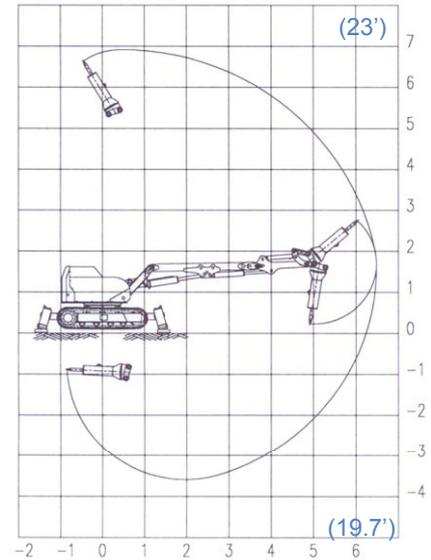

Outline Dimensions in mm (ft.)



HD ENGINEERING LTD.

No. 21 Yip Wo Street, On Lok Tsuen, Fanling, N.T., Hong Kong

Tel : (852) 2675 4789

E-mail : sales@hdengineering.com

Fax : (852) 2677 4536

Web-site : <http://www.hdengineering.com>

HD50RB_V1_2010_01