


## ASW Switch for Double Target Signals

### [1] Installing the Switch

Orient the switch on the turnout so that the switch handle is depressed when the turnout is thrown to the diverging route position. Use the two screws provided along with some cement to secure the switch to the turnout ties. (See Fig.1)

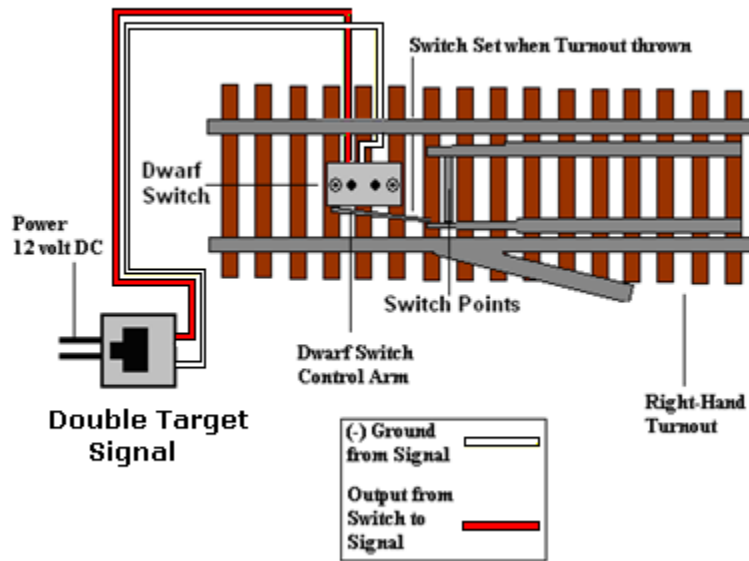


### [2] Connect the Wires

Run the wire under the rail between two ties. Attach the red and white wires of the switch to the red wire from the signal.

## ASW Switch for Double Target Signals

### [1] Installing the Switch

Orient the switch on the turnout so that the switch handle is depressed when the turnout is thrown to the diverging route position. Use the two screws provided along with some cement to secure the switch to the turnout ties. (See Fig.1)

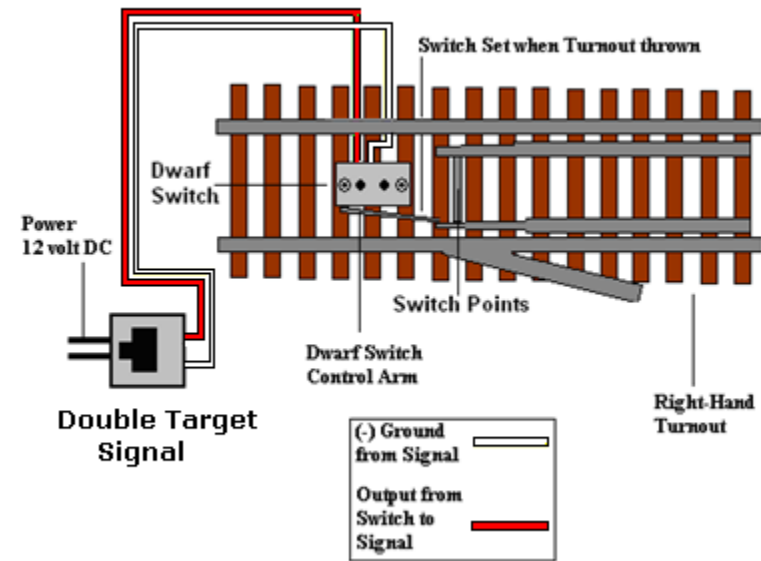

### [2] Connect the Wires

Run the wire under the rail between two ties. Attach the red and white wires of the switch to the red wire from the signal.