

### Specifications

- Wattage - 48W/56W/84W
- Weight - 15 lbs
- Input Total Power - 56W/64W/92W
- Lumens - 4968/5867/7932@4500 Kelvin
- Luminated Area - 20ft: 85ft x 85ft ;24ft : 118ft x 118ft ; 30ft : 138ft x 138ft
- Illuminance Uniformity - >0.6
- Input Voltage - 110/115-220/277/480
- Input Voltage - ≥90%
- Current - Single 325 mA
- Meanwell Drivers - HLG-60H/HLG-100H
- LED Single Power - 1.5W
- Lumen Per Watt - ≥110Lm/W
- Environmental Temperature - 95F~122F
- Lamp Temperature - <122F
- Efficiency - >90%
- CRI - >70
- Power Factor - >0.95
- IP - IP65

### Features

- COOL-LITE MODERN LED FIXTURES are the perfect solution for illuminating any parking area.
- Our high-performance technology is encased in sleek, aesthetically appealing housing, rendering optimum results.
- Five Kelvin options to choose from: 3000k or 3500k, 4000k or 4500k, 5000k for allowing the best choice for each application.
- 5 year warranty.





### Ordering Information

EXAMPLE: GL-48W-5k-<277-T5-02

Sensor	Wattage	Kelvin	Max Voltage	Lens	Colors
SE (Enlighted Sensor)	48W	3k or 3.5k	277V	T2	01 (Gray)
None (Standard)	56W	4k or 4.5k	480V	T3	02 (Brown)
		5k		T5	03 (White)
	84W				04 (Black)



\*

Photometrics Showing Type-2 & 3 Distribution

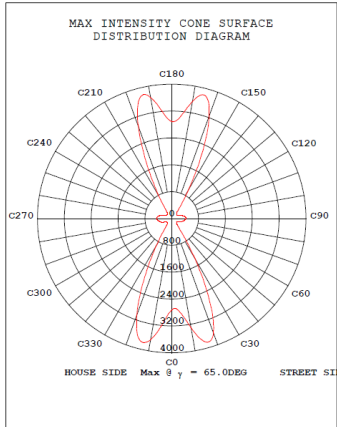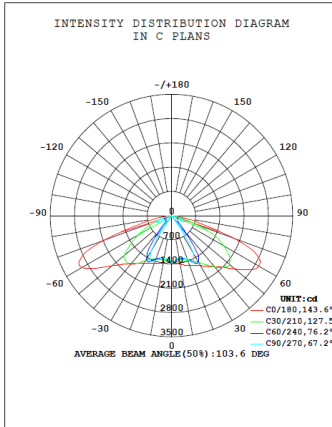

C Range: 0 - 360DEG  
C Interval: 5.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operator: 冯强  
Test Date: 2012-07-30



γ Range: 0 - 90DEG  
γ Interval: 0.5DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.262  
Humidity: 65.0%  
Test Distance: 9.970m [K=1.0000]  
Remarks: 56W GLC-LD01

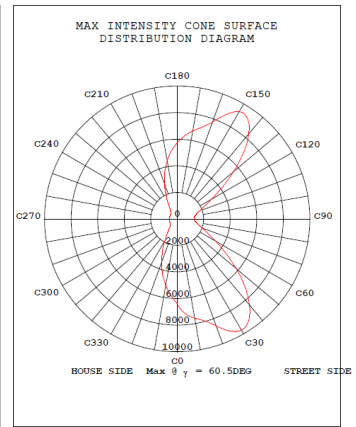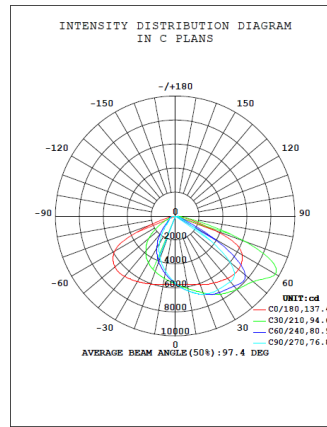

C Range: 0 - 360DEG  
C Interval: 10.0DEG  
Test Speed: MEDIUM  
Temperature: 25.3DEG  
Operator: Fq  
Test Date: 2015-11-07

γ Range: 0 - 180DEG  
γ Interval: 0.5DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.262  
Humidity: 65.0%  
Test Distance: 9.970m [K=1.0000]  
Remarks:

Photometrics Showing Type-5 Distribution

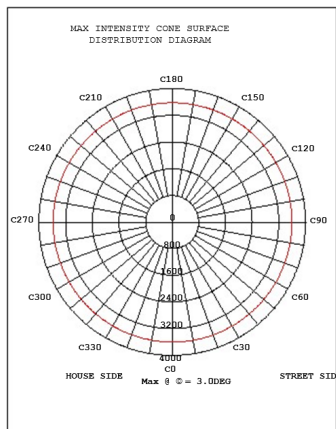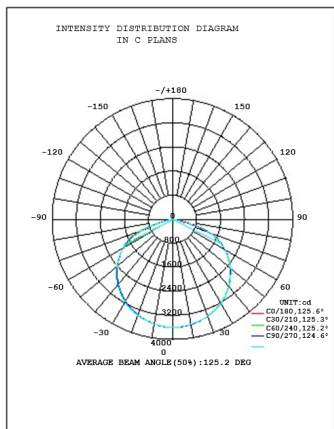

C Range: 0 - 360DEG  
C Interval: 5.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Test Date: 2014-04-26

© Range: 0 - 90DEG  
© Interval: 0.5DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.262  
Humidity: 65.0%  
Test Distance: 9.970m [K=1.0000]