

**Houston International Specialty Inc.**

<b>Size</b>	9.625
<b>Grade</b>	P110
<b>Weight</b>	40


## TCBC-HT

Coupling and Pipe Dimensions (in)						
	Outer Diameter	Inner Diameter	Coupling	Make-Up	Wall	Drift
			Length	Loss	Thickness	Diameter
<b>Coupling</b>	10.625	9.535				
<b>Pipe</b>		8.835	9.625	4.813	0.395	8.679
<b>Pin</b>		8.835				


Torque Values (ft-lbs)				
Field End Make-Up			Max. Working Torque <sup>1.</sup>	Yield Torque
Minimum	Optimum <sup>2.</sup>	Maximum		
29,500	34,300	38,500	52,500	62,000

Yield Stress (x1000 lbs.)	
Tensile	Compressive
1,260	1,260

Maximum Pressure (psi)	
Internal	External
7,900	3,470

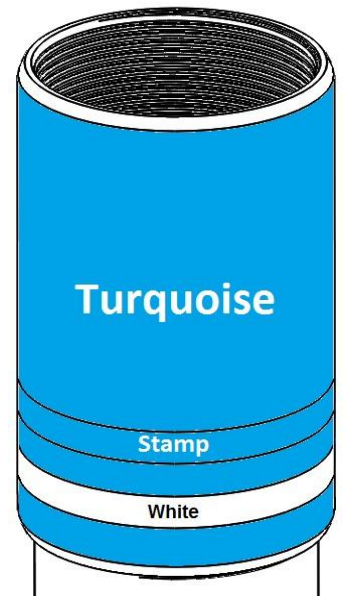

- <sup>1.</sup> Max. Working Torque value is not to be exceeded during operation.
- <sup>2.</sup> If Optimum Torque does not meet the Base of Triangle Stamp, M/U to the Base of Triangle.

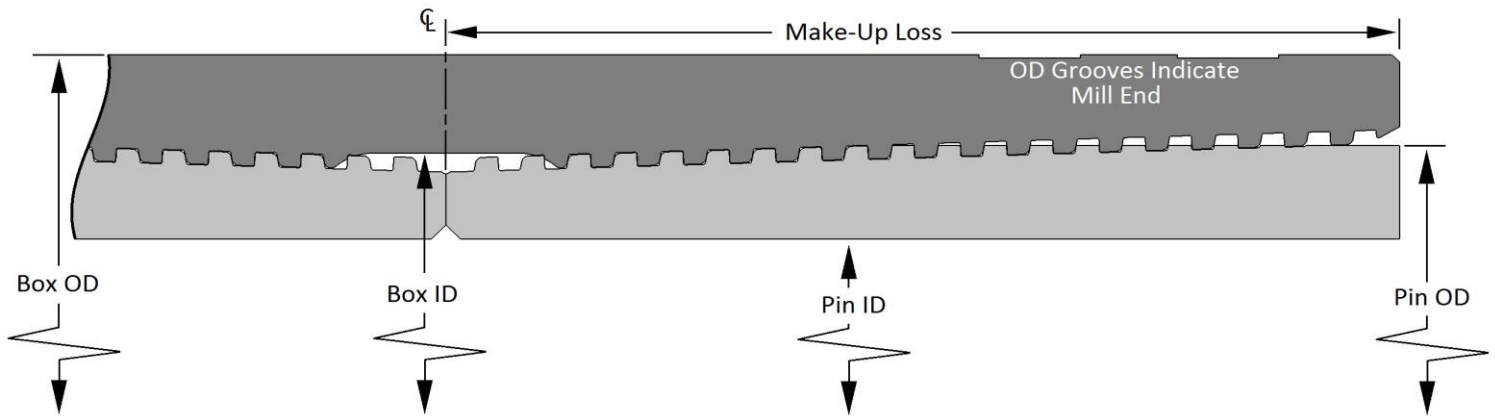

\*Data are for information purposes only. Though HIS has made efforts to ensure accuracy, HIS makes no warranty for loss or damage due to its use.