


12-36 Panel

Our 12-36 profile is the panel of choice for industrial and commercial metal roofing and siding applications, and is an excellent choice for pre engineered metal buildings. The 12-36 profile provides the strength and durability to withstand the toughest conditions and is ideal for slopes as low as 1/12.

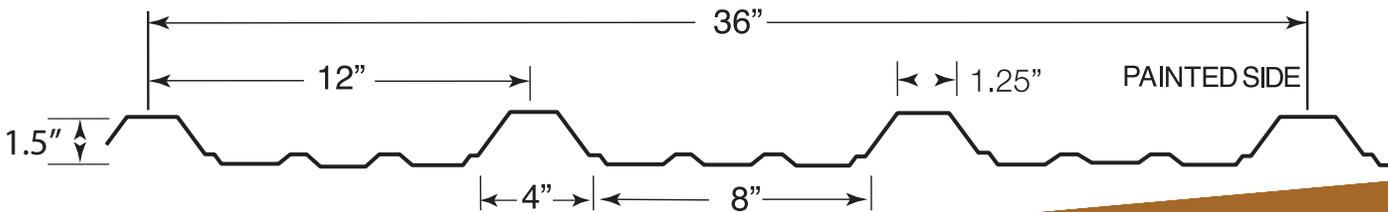

12-36 Application/Specifications

Use: Roof/Wall

Slope: As low as 1/12

Coverage: 36" wide

Length: 3' to 45'

Rib Height: 1.5" on 12" centres

Fastener System: Exposed Fastener

Recommended Substrate: Open Framing or Solid Substrate

Recommended Accessories

Trim/Flashing	Closures
See Trim Section	LP 12-36 Large Tab (Vented)
	12-36 Large Tab
	12-36 Small Tab
Fasteners	Miscellaneous
MG#14x1.25" (wood)	Butyl Tape
MG#14x2" (wood)	Roof Boots
MG#10x1.5" (wood)	X Seal
MD#14x__" (metal)	Metal Roof Sealant
ST#14x7/8" (laps)	Synthetic Underlayment

Recommended Fastener Patterns



Recommended fastener pattern at eaves, ridges & endlaps

Side Lap fasteners recommended when installing as roof panel

Pre drilling sheets in bundles is not recommended during installation for any steel sheets as this can cause hot burs which can rust to the pre painted or bare sheet and create a rusting appearance around drill holes

Head Office
VersaFrame Inc.
2806 - 5th Street
Nisku, AB
T9E0H1

TF: 877-463-8256
PH: 780-979-0325
FAX: 780-955-8636
www.versaframe.ca