CITIZENS PROPERTY INSURANCE CORPORATION

BUILDING TYPE II AND III MITIGATION VERIFICATION AFFIDAVIT

This affidavit must be completed to capture mitigation features applicable to a Type II (4 to 6 story) or Type III (7 or more story) building. This affidavit is required for either residential condominium unit owners or commercial residential applicants requesting mitigation credits in such buildings.

| WIND LOSS MI | TIGA | TION INFORMATION |
|--|----------------------------|--|
| PREMISES #: | 1 | SUBJECT OF INSURANCE: Harbour Isle at Hutchinson Island East POLICY #: |
| | | |
| BUILDING #: | 6 | STREET ADDRESS: 6 Harbour Isle Dr. East Fort Pierce, FL 34945 |
| # STORIES: | 4 | BLDG DESCRIPTION: 6 Harbour Isle Dr. East |
| BUILDING TY | PE: | X !! (4 to 6 stories) |
| | | |
| Terrain Expo | sure (| Category must be provided for each insured location. |
| l hereby certify Florida Building | that th Code | e building or unit at the address indicated above TERRAIN EXPOSURE CATEGORY as defined under the is (Check One): Xi Exposure C or Exposure B |
| Certification be premises. | low fo | r purposes of TERRAIN EXPOSURE CATEGORY above does not require personal inspection of the |
| | | |
| Certification of Built On or After | | nd Speed is required to establish the basic wind speed of the location (Complete for Terrain B only if Year , 2002). |
| I hereby certi speed lines defir | i fy t ha ned un | t the basic WIND SPEED of the building or unit at the address indicated above based upon county wind der the Florida Building Code (FBC) is (Check One): ☐ ≥100 or ☐ ≥110 or ☒ ≥120 |
| Certification design establish | of Wi ed for | nd Design is required when the buildings is constructed in a manner to exceed the basic wind speed the structure location (Complete for Terrain B only if Year Built On or After Jan.1, 2002). |
| | | t the building or unit at the address indicated above is designed and mitigated to the Florida Building Code N of (Check One): ☐ ≥100 or ☐ ≥110 or ☑ ≥120 |
| Certification for inspection of the | the pu | rpose of establishing the basic WIND SPEED or WIND SPEED DESIGN above does not require personal ises. |
| | | |
| Specify the type o | f miti | gation device(s) installed: |
| | | |
| Ro | of Co | verings |
| | Lev | el A (Non FBC Equivalent) – Type II or III |
| اسط | All ro | oof cover types and configurations that do not meet Level B below. |
| X | | el B (FBC Equivalent) – Type II or III |
| | Root | coverings that satisfy all of the following conditions and are one of the following types: |
| | | Built-Up |
| | | Modified Bitumen |
| | | Sprayed Polyurethane foam |
| | | Liquid membrane applied over concrete Asphalt roll roofing |
| | | Wood shakes in good condition, attached with at least two mechanical fasteners |
| | 7. | Ballasted roof designed to meet the design wind speed requirements |
| | | Asphalt roof coverings installed in accordance ASTM D 3161 (modified for 110 mph) or Miami Dade County PA |
| | 0. | 107-95. |
| | | All mechanical equipment must be adequately fied to the roof deck to resist overturning and sliding during high winds. Any flat roof covering with flashing or coping must be mechanically attached to the structure with face fasteners (no clip/cleat systems); and roof coverings on flat roofs must be 10 years old or less. |

MIT-BT II & III (8/2008)

CITIZENS PROPERTY INSURANCE CORPORATION BUILDING TYPE II AND III MITIGATION VERIFICATION AFFIDAVIT

| \boxtimes | Ro | of Deck Attachment |
|-------------|-----|---|
| | П | Level A – Wood or Other Deck Type II only |
| | | Roof deck composed of sheets of structural panels (plywood or OSB). Or |
| | | Architectural (non-structural) metal panels that require a solid decking to support weight and loads. Or |
| | | Other roof decks that do not meet Levels B or C below. |
| | П | Level B – Metal Deck Type II or III |
| | | Metal roof deck made of structural panels that span from joist to joist. |
| | X | Level C – Reinforced Concrete Roof Deck Type, II or III |
| | | A roof structure composed of cast-in-place or pre-cast structural concrete designed to be self-supporting and integrally attached to wall/support system. |
| | | |
| | Sec | condary Water Resistance |
| | | Underlayment N/A |
| | ш | |
| | | A self-adhering polymer modified bitumen roofing underlayment (this capper sheets with peel and stick underside located beneath the roof covering and normal felt underlayment) with a minimum width of 6" meeting the requirements of ASTM D 1970 installed over all plywood/OSB joints to protect from water intrusion. All secondary water resistance products must be installed per the manufacturer's recommendations. Roofing felt or similar paper based products are not acceptable for secondary water resistance. |
| | | Foamed Adhesive |
| | | A foamed polyurethane sheathing adhesive applied over all joints in the roof sheathing to protect interior from water intrusion. |
| | | The description of the second |
| | | |
| | | |
| \boxtimes | Ор | ening Protection |
| \boxtimes | _ | ening Protection Class A (Hurricane Impact) — All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (9 lb.) impact requirements of: |
| \boxtimes | _ | Class A (Hurricane Impact) – All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (9 lb.) impact requirements of: |
| \boxtimes | _ | Class A (Hurricane Impact) – All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (9 lb.) impact requirements of: SSTD12; |
| | _ | Class A (Hurricane Impact) – All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (9 lb.) impact requirements of: SSTD12; ASTM E 1886 and ASTM E 1996; |
| | _ | Class A (Hurricane Impact) — All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (9 lb.) impact requirements of: □SSTD12; □ASTM E 1886 and ASTM E 1996; □Miami-Dade PA 201, 202, and 203; |
| | _ | Class A (Hurricane Impact) – All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (9 lb.) impact requirements of: SSTD12; ASTM E 1886 and ASTM E 1996; |
| | _ | Class A (Hurricane Impact) — All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (9 lb.) impact requirements of: □SSTD12; □ASTM E 1886 and ASTM E 1996; □Miami-Dade PA 201, 202, and 203; |
| | _ | Class A (Hurricane Impact) — All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (9 lb.) impact requirements of: SSTD12; ASTM E 1886 and ASTM E 1996; Miami-Dade PA 201, 202, and 203; Florida Building Code TAS 201, 202 and 203. All glazed openings less than 30 feet above grade shall meet the Large Missile Test standard referenced above. All glazed openings between 30 and 60 feet above grade must meet the Small Missile Test of the respective standard. For buildings located in the HVHZ (High Velocity Hurricane Zone) all glazed openings greater than 60 feet above grade must also meet the Small Missile Test of the respective standard. Class B (Basic Impact) — All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (4.5 lb.) impact requirements of: |
| | _ | Class A (Hurricane Impact) — All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (9 lb.) impact requirements of: SSTD12; ASTM E 1886 and ASTM E 1996; Miami-Dade PA 201, 202, and 203; Florida Building Code TAS 201, 202 and 203. All glazed openings less than 30 feet above grade shall meet the Large Missile Test standard referenced above. All glazed openings between 30 and 60 feet above grade must meet the Small Missile Test of the respective standard. For buildings located in the HVHZ (High Velocity Hurricane Zone) all glazed openings greater than 60 feet above grade must also meet the Small Missile Test of the respective standard. Class B (Basic Impact) – All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant |

MIT-BT II & III (8/2008)

CITIZENS PROPERTY INSURANCE CORPORATION BUILDING TYPE II AND III MITIGATION VERIFICATION AFFIDAVIT

CERTIFICATION

☑ a resident licensed General, or Building Contractor, ☐ a Licensed Building Inspector, ☐ a Registered Architect, ☐ an Engineer in the State of Florida, ☐ a Building Code Official (who is duly authorized by the State

I certify that I am (CHECK ONE OF THE FOLLOWING):

of Florida or its county's municipalities to verify building code compliance).

I also certify that I personally inspected the premises at the Location Address listed above on the inspection date provided on this Affidavit. In my professional opinion, based on my knowledge, information and belief, I certify that the above statements are true and correct.

This Affidavit and the information set forth in it are provided solely for the purpose of verifying that certain structural or physical characteristics exist at the Location Address listed above and for the purpose of permitting the Named Insured to receive a property insurance premium discount on insurance provided by Citizens Property Insurance Corporation and for no other purpose. The undersigned does not make a health or safety certification or warranty, express or implied, of any kind, and nothing in this Affidavit shall be construed to impose on the undersigned or on any entity to which the undersigned is affiliated any liability or obligation of any nature to the named insured or to any other person or entity.

Name of Company:

Dennis Higginbotham for Don Meyler Inspections

Phone:

ORDITATELY OF THE MENT OF THE MENT

Name of Company:

Dennis Higginbotham

License Type

Building

License #

CBC1251874

CBC1251874

CBC1251874

Date:

3/25/2013

Applicant's Signature:

Date:


3/25/2013


[&]quot;Any person who knowingly and with intent to injure, defraud, or deceive any insurer files a statement of claim or an application containing any false, incomplete, or misleading information is guilty of a felony of the third degree."




Inspection Photos 6 Harbour Isle Dr. East




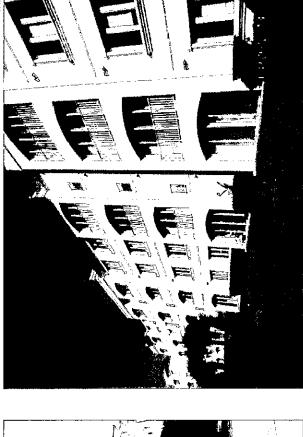

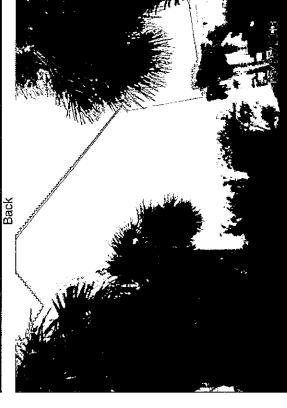



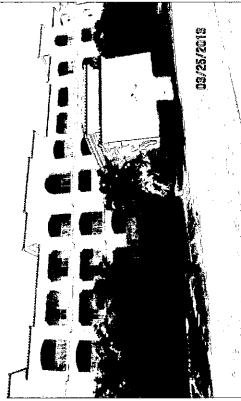

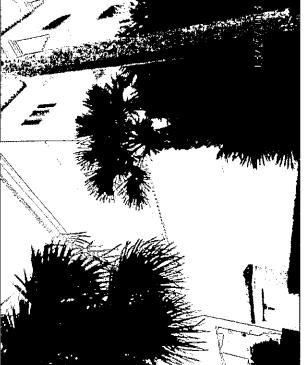

Left

Right




Inspection Photos

6 Harbour Isle Dr. East



Don weyler Inspections

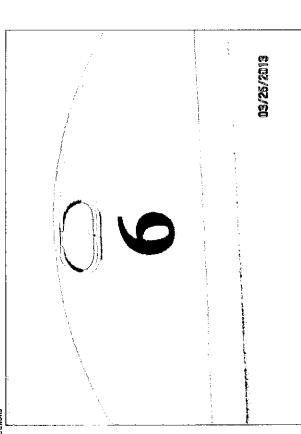

2

125 1

9

Address in Note to built insect under the start reviewed by Missen Dack County and other series where it has a transfer the start of th

a stock of this start of the county Product.

It has a factor of this start of the county Product.

In the Read of this start of the the explanation date stand below. The Misent-Dade County) resident the interior of the valid of the this county and the AEI of the start of the valid of the county and the AEI of the start of the county and the AEI of the county and the county are the county and the county and the AEI of the this county the county and the AEI of the this this county are the county the county and the AEI of the county the county and the county the county and the this county the county and the county are county and the county and the county and the county are county are county and the county are county and the county are county are county and the county are county and the county are sected this is meet the requirements of the applicable building code.

Described to report of the second forward, and has been destigned to comply with the Photids Building of second to Harisan Zone. DESCRIPTIONS Redes 1923 719" Alembases Meciscoscal (Ridding Windows

smap for 6 promed by POT Industries, desed 2/16/98, with revisions 12/29/03 signed scaled by Robed Zet, P.S., besing the Minni-Dade County Product Control Revision starmy with the Notice of Acceptant smokered dess by the Minni-Dade County Product Control Division. ATTOTAL DOCINALYIS Desting No.ALL2, titled "Aluminum Hockroatal Silding Window", absetts

Americ Haract Rating; Large and Small Mindle Impact

PERIFFLE of the NOA shall be considered after a tonown! application has been filed and there has be-Transport of the NOA will come after the expiration date or if there has been a revision or char LARLING Each was total beer a permanent label with the manufacturer's name or logo, city, state and which we with product of the product or process. Misture of this NOA as an endorsement of a second second of the second of the product or process. Misture of this NOA as an endorsement of a second of the second o following retinent "Allami-Dade County Frudact Control Approved", unloss otherwise noised berein. there is the applicable building code togratively effecting the performence of this product.

Reinforced Concrete Roof Deck

03/25/2013

がある。 のでは、 のでは、

THE WAY OF THE PARTY OF THE WAY OF THE WAY WE WAY THE WAY OF THE W THE PARTY OF THE PARTY WAS DESCRIBED BY MANY WHITE HE WAS THE PARTY OF DATE OF THE CONTROL OF THE PROPERTY OF THE PRO

The product represed as distributed the content and the bone designed to complete with the High Vibration of the state of the break british Code.

Description Sees Siden "Oxyo"American Siden Ches Dear

der piech Safk gegentelle mendelement dennt 3/1889 with revision en 3/2003, nigened mad medded by Cod, 22. Houst beskinnt Date County Product Control Revision waste with the Northe of Actor medde and published to the Mani-Date County Product County Devision. APPROVIL DOCTARN PERMICS NO. 4345 BMS "Abumenta Sickas (these Docs, Impact", these MINITERACT RATING: Large and Sould Minths Impact

This will not consider a code regarderly affecting the performance of the protect.

This will not the No. 4 will occur after the expirition date or if these has been a serial product of the protect of process. Moreover, the process of the NO. 4 will not the product or process. Moreover, the NO. 4 will not the product or process. Moreover, the NO. 4 will not the product or process. the contract of the production and a reserve a specification of the product.

Impact Rated Glazed Door NOA





Inspection Photos 6 Harbour Isle Dr. East

