



Houston International Specialty Inc.

Size	7
Grade	N/L 80
Weight	26

TCPC



Coupling and Pipe Dimensions (in)						
	Outer Diameter	Inner Diameter	Coupling Length	Make-up Loss	Wall Thickness	Drift Diameter
Coupling	7.656	6.189				
Pipe		6.276	10.812	4.860	0.362	6.151
Pin		6.189				

Torque Values (ft-lbs)				
During Make-Up			Max. Working Torque	Yield Torque
Minimum	Optimum	Maximum		
10,950	12,900	14,050	22,300	28,000

Yield Stress (x1000 lbs.)	
Tensile	Compressive
604	604

Maximum Pressure (psi)	
Internal	External
7,240	5,410

Blanking Dimensions (in)			
	ID (+0.0 -0.032)	OD (+0.032 -0.0)	OAL (+1.5 -0.0)
Box End	6.189	7.656	5.860
Pin End	6.189	7.000	5.360

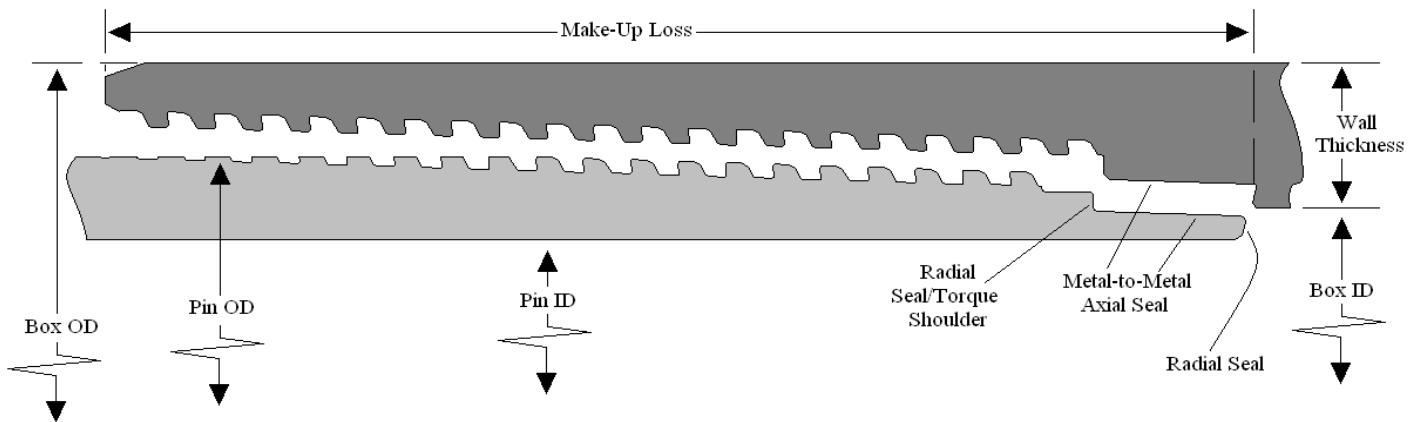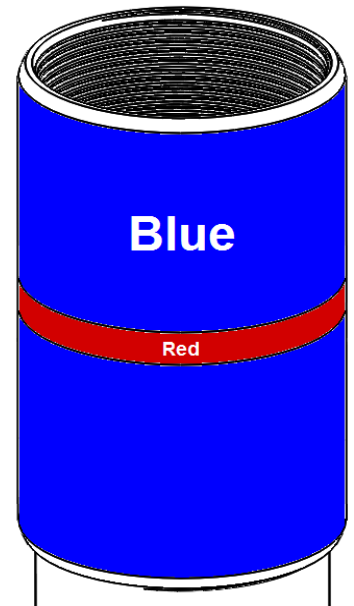

*Data are for information purposes only. Though HIS has made efforts to ensure accuracy, HIS makes no warranty for loss or damage due to its use.