

HP- Series Valve Testers

Valves 1/2" to 36" and up to 10,000 psi

The HP series testers allow you to perform shell, seat, and leakage rate test on shut-off valves in the horizontal position. These modular designs are configured to customer needs with options including inclined reaction beams for easy loading and vacuum system to remove trapped air before testing.

Model	Valve Size	Test PSI	Clamping
HP060	1/2" - 4"	3K - 10K	60 Tons
HP100	2" - 16"	3K - 10K	100 Tons
HP200	4" - 24"	3K - 10K	200 Tons
HP400	8" - 36"	3K - 10K	400 Tons

Features:

- Quick clamp and fill to save set-up time
- 3000, 6000 or 10000 psi hydro test
- 150 psi air test
- Test on either side of the valve
- Stainless steel seal plate

Options:

- Increased hydro testing capacities
- Vacuum System
- Water Recycling
- Data Acquisition System
- Safety Barriers




Applications:

- Gate Valves
- Ball Valves
- Plug Valves
- Globe Valves

Connections:

- All Standard Flange Types

Specifications:

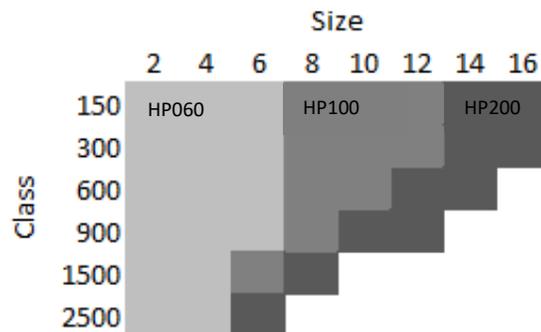

*Size based on standard valve flange size

*Capacity based on standard HP capacity @ shell test psi

